

Contents

1. Extension/SmartList	2
2. Manual:Extension/BlueSpiceSmartList	2

Extension/SmartList

Redirect to:

- [Manual:Extension/BlueSpiceSmartList](#)

Manual:Extension/BlueSpiceSmartList

Contents

1	What is BlueSpiceSmartList?	2
2	Available tags	3
3	Where to find the function BlueSpiceSmartList?	3
4	Tag <bs:smartlist>	4
4.1	Parameters	4
4.2	Example in wikicode	5
5	Tag <bs:newbies>	6
5.1	Parameters	6
5.2	Example in wikicode	6
6	Tag <bs:toplist>	7
6.1	Parameters	7
6.2	Example in wikicode	8
7	Related info	8

What is BlueSpiceSmartList?

BlueSpiceSmartList introduces a number of tags that can be placed on any page to show a list of most relevant pages based on different criteria.

Available tags

Cancel
Insert magic word or tag
Done

1. Choose tag or magic word	Description
countusers	<p>Shows automatically generated lists of articles. The configuration works through several modi and parameters.</p> <p>Examples</p> <p>Mode: Recent changes</p> <pre><bs:smartlist new="true" count="7" ns="104" trim="false" /></pre> <p>Mode: What links here</p> <pre><bs:smartlist mode="whatlinkshere" target="ARTICLENAME" /></pre> <p>See also</p> <p>https://en.wiki.bluespice.com/wiki/Reference:SmartList</p>
countfiles	
countcharacters	
Page access	
Tag cloud	
tagsearch	
signhere	
smartlist	
newbies	
toplist	


BlueSpiceSmartList offers three different tags:

- `<bs:smartlist />` - main tag used to display list of pages based on various criteria
- `<bs:newbies />` - displays list of recently registered users
- `<bs:toplist />` - displays list of most visited pages

Where to find the function BlueSpiceSmartList?

All of the tags listed above can be added through "Insert magic" menu of [VisualEditor](#). For more information on how to insert magic words, see [BlueSpiceInsertMagic](#).

Tag <bs:smartlist>

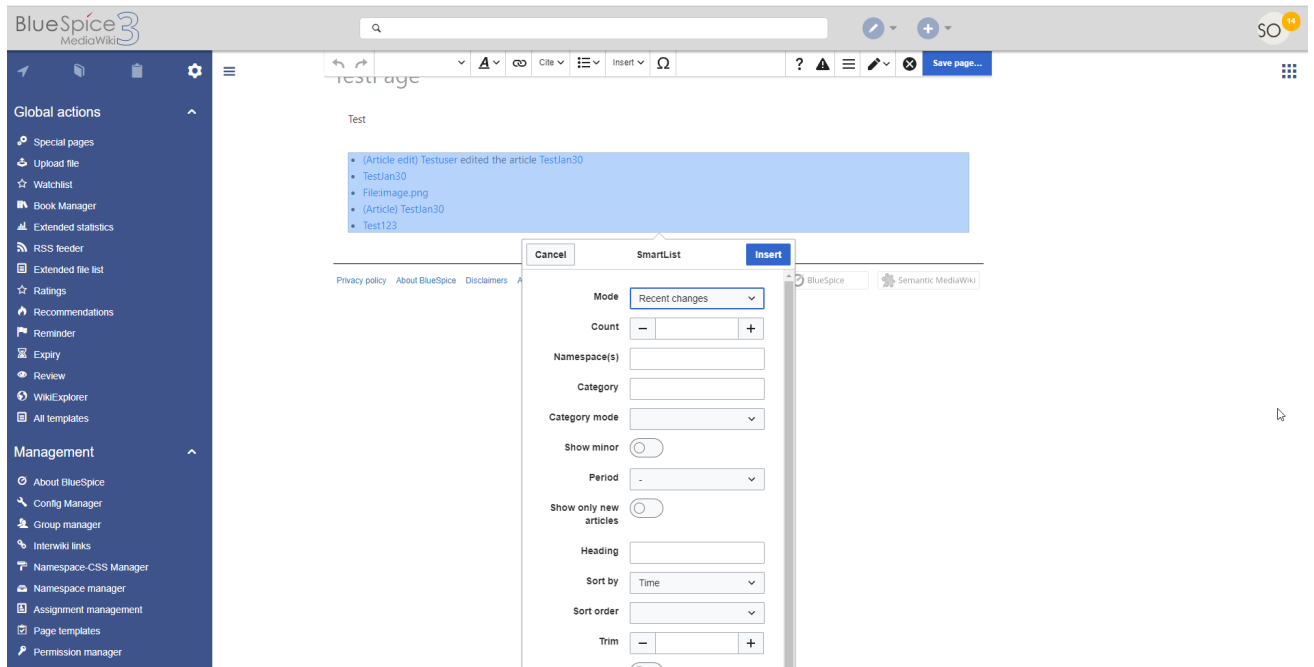

Once the tag is added to the page, configuration dialog (inspector) is shown. Two modes for showing pages are offered:

- Recentchanges - shows the most recent changes. This is the default option.
- Changesofweek - shows the articles which have been chosen as a "Change of the week".

Parameters

The SmartList can be limited or extended with the following parameters:

Count - count	The number of articles to be shown. Default value: 5
Namespaces - ns	Only articles from given namespace will be listed. The namespaces can be entered by IDs or by names. Several namespaces can be named with pipes: ns="0 2 5" or ns="Help User Test". Default: All namespaces are included.

Exclude NS - excludens	Articles from given namespaces will not be shown. The namespaces can be entered by IDs or by names. Several namespaces can be named with pipes: ns="0 2 5" or ns="Help User Test". Default: All namespaces are included.
Category - cat	Only articles from given category will be listed. Selecting several categories is not possible. Default: All categories.
Show minor - nominor	Minor changes (changes marked with an "m" in the recent changes) will not be listed. Default: Minor changes are listed.
Period - period	Only changes within given period are shown. Possible values: 'month', 'week', 'day'. Default: No limit.
Show only new articles - new	Only new pages will be listed. Default: All pages are shown
Trim - trim	Long article names are not cropped. Default: The title is cut off after 30 characters.
Show text showtext	With this option, a line of the article contents will be shown alongside the title.
Trim text - trimtext	"trimtext" sets the number of characters of an article's content shown. This is only relevant when <i>s</i> <i>howtext="true"</i>). <i>Note</i> : trimtext="0" is <u>not</u> possible.

Example in wikicode

Of course, bs:smartlist tag can be added directly into wikitext:

```
<bs:smartlist mode="recentchanges" new="true" count="7" ns="104" trim="false" />
```

Tag `<bs:newbies>`

The

```
<bs:newbies/>
```

tag shows the recently registered members on the wiki.

Parameters

Count - count	The number of users to be shown; the default value is 10.
----------------------	---

Example in wikicode

```
<bs:newbies count="7"/>
```

Tag <bs:toplist>

Cancel
Insert magic word or tag
Done

1. Choose tag or magic word

- countusers
- countfiles
- countcharacters
- Page access
- Tag cloud
- tagsearch
- signhere
- smartlist
- newbies
- toplist

Description

Shows automatically generated lists of articles. The configuration works through several modi and parameters.

Examples

Mode: Recent changes

```
<bs:smartlist new="true" count="7" ns="104" trim="false" />
```

Mode: What links here

```
<bs:smartlist mode="whatlinkshere" target="ARTICLENAME" />
```

See also

<https://en.wiki.bluespice.com/wiki/Reference:SmartList>

This tag shows list of most visited pages.

Parameters

Count - count	The number of articles to be shown; the default value is 10.
Namespaces - ns	Only articles from these namespace will be shown. You can put several namespaces here, separated by commas.
Category - cat	Only articles from this category will be shown. You can put several categories here, separated by commas.
Period - period	The period that should be used (alltime or month). The default is alltime.

Example in wikicode

```
<bs:toplist count="7" ns="Help|QM" />
```

Related info

- [Reference:BlueSpiceSmartList](#)