

Contents

1. Manual:Extension/BlueSpiceExtendedSearch .....	2
2. Manual:Extension/BlueSpiceConfigManager .....	12
3. Manual:Extension/BlueSpiceSocial .....	32
4. Manual:Preferences .....	36
5. Reference:BlueSpiceExtendedSearch .....	52

## Search

**ExtendedSearch** replaces the default MediaWiki search engine. It is based on the [OpenSearch](#) (up to BlueSpice 4.3 the Elasticsearch) engine. Pages and files are indexed immediately and available for searching in real-time.

### Contents

1 Usage .....	3
2 Quick search .....	3
2.1 Recently viewed v4.4.1+ .....	3
2.2 Title search .....	3
2.3 Namespace and subpage "pills" .....	4
2.4 Dates as search terms .....	5
3 Search Center (extended search) .....	5
3.1 Search operators .....	6
3.1.1 AND .....	6
3.1.2 " (apostrophes) .....	6
3.1.3 NOT .....	6
3.1.4 OR .....	7
3.1.5 * (wildcard) .....	7
3.2 Elements .....	7
3.2.1 Results relevance .....	9
3.2.2 Exporting search results .....	9
4 Configuration .....	9
5 SearchAdmin .....	11

## Usage

---

Extended search offers two ways of searching for content:

1. **Title search** using the [Quick search](#)
2. **Fulltext search** using the [Search center](#)

By default, the search indexes:


- **wiki pages**: all content pages, except for pages in the MediaWiki namespace
- **special pages**: all pages in the namespace *Special*
- **repo files**: files uploaded to the wiki - for text files like Word documents and PDFs, this includes content and metadata
- **external files**: files from arbitrary locations from accessible storage paths (e.g., mounted drives)
- **social entities**: entities (=pages) created by the [BlueSpiceSocial](#) extension, such as blog posts and user profiles

## Quick search

---

### Recently viewed v4.4.1+

When you place the cursor in the search field, it returns a list of pages that you have found and accessed through a recent search. Any suggested pages that you are not interested in, you can remove from this view by clicking on the  to the right of the page name. Once you start typing, the default suggestions disappear.

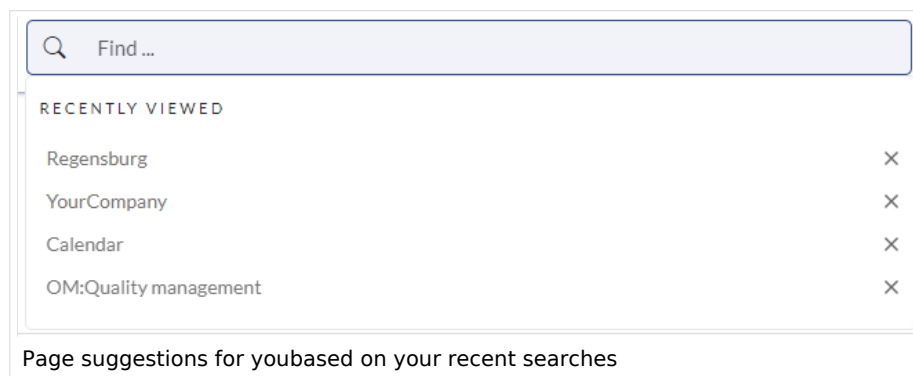

### Title search

The most prominent search feature is the search box in the header of the wiki. If a user has not switched to the search center yet, this field simply looks for a page name or display title that contains the exact search term. The title search does not do a full-text search. You have to switch to the full-text search (= [Search center](#)) for that. This can be done by simply pressing the  key after entering a search term in the Quick Search field.

**What users should know about this search field (- you can try the following searches in this helpdesk):**


1. It is **not case-sensitive**: "qual" or "Qual" return the same results.

2. The search term needs to be at the **beginning of a word**: the search term "ards" will not return pages that contain "cards".
3. Search results are **limited to 7 page titles**. This is important to understand to have the right expectations. In most cases, the search field is simply used as a springboard to pages that are known to the user (e.g., to jump to a team page or to the page "Processes" or any other known page the user wants to reach quickly).
4. **Spelling mistakes** will not return any results: "Qality" does not return "Quality".
5. Multiple search terms can be in **any order** to produce results ("toc download" finds pages just like "download toc").
6. **Search operators** such as `" "`, `OR`, `AND` are not supported. However, they are supported in the [full-text search](#).
7. The **sort order** for the results are based on a combination of best title match and last edit date of the page. (You can find the technical details on the [reference page for the extension ExtendedSearch](#). Some configuration changes are possible if the wiki is hosted on premise. There are no configuration options in Cloud wikis. )



## Namespace and subpage "pills"


The search bar supports pills for namespaces and subpages.

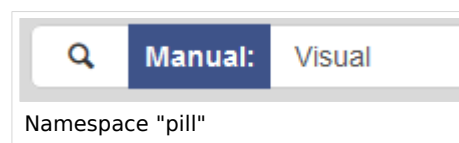

If a user types `Manual:` and clicks "Enter", a pill for the namespace "Manual" appears and the search for the following term is limited to this namespace. . Subpage pills work in the same way. If the user types in `PageName/`, any term after that is matched in the context of that page. If you search for "TestPage/Te", for example, the search will match only subpages of "TestPage" that contain "Te" in the title, like "TestPage/Test" and "TestPage/TestSubpage".


## Dates as search terms

The search recognizes certain date formats. In the search center, these date formats are treated with surrounding quotation marks.

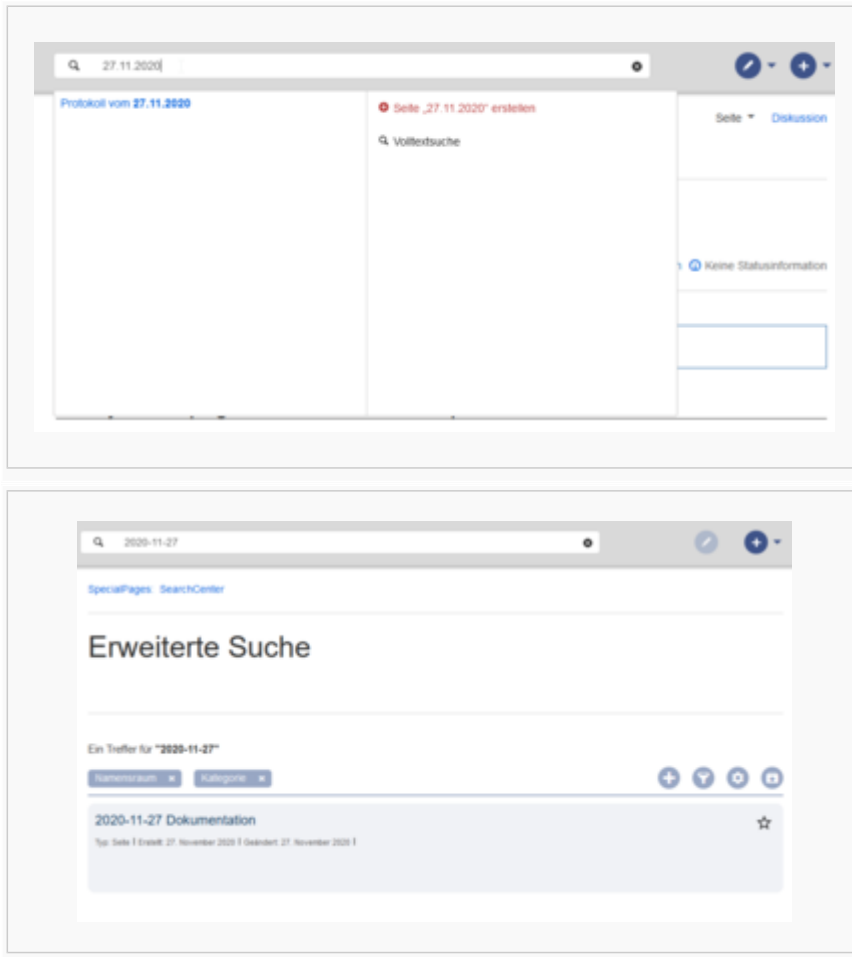

## Search Center (extended search)

As soon as you trigger the full-search with the magnifying glass symbol or the *Enter* key, the wiki switches to the Search Center. This is a special page that offers the full functionality of the search. The search in the Search Center is carried out using the same search bar that is also used for autocomplete. Here, the search engine carries out a full text search, which also includes the metadata of documents. It does not index the wikitext of a wiki page, but rather the rendered content, that is the output by the browser.

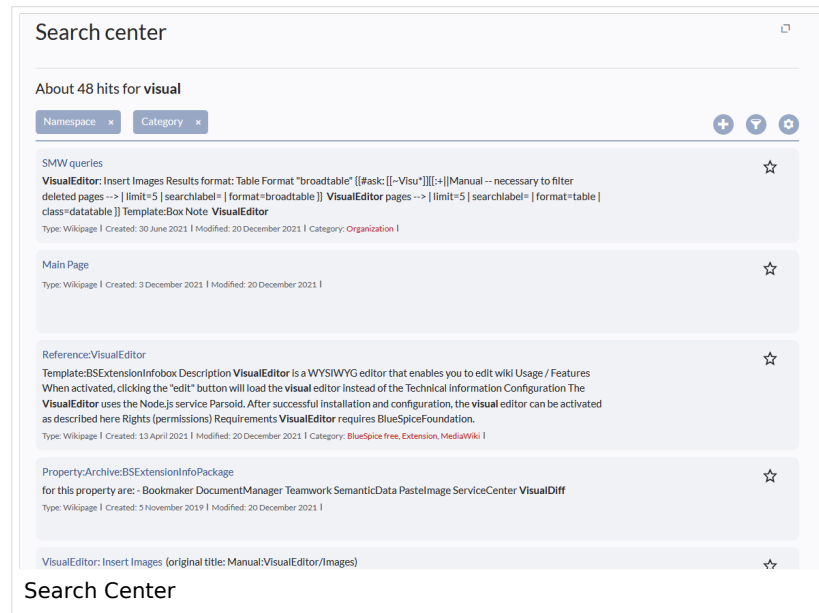

## Search operators

**Important!** Search operators only work in the search center (fulltext search). You cannot use search operators in the title search.

If you are **searching for contiguous words**, they should be enclosed in quotation marks (") for performance reasons and to support a unique search.

Search operators have to be written in **all-caps**.

### AND

- `admin AND docu`: Returns pages that contain the **exact term** `admin` **as well as the exact term** `docu`
- `admin* AND docu`: If the term `administration` should be found, you need to provide a wildcard asterisk (`*`).

**Compare:** The search `admin docu` automatically is a wildcard search. It returns pages that contain **both** `admin*` **and** `docu*`. This search normally finds more results than the search `admin* AND docu` (because in the second case, the exact term `docu` is returned).

### " (apostrophes)

Apostrophes around a search term triggers an **AND** search for **all terms** in the query:

- `"admin" docu`: same result as `admin AND docu` (i.e., also the precise term `docu` will be searched).

### NOT

- `admin* NOT docu*`: Returns pages that contain words that start with `admin`, but that don't contain words that start with `docu`.

OR


- `admin OR docu` : Returns pages that contain **either the exact term** `admin` **or the exact term** `docu`.

\* (wildcard)


- `admin*` : Returns pages that contain words that begin with `admin`.

## Elements


- **Hit count** - shows how many matches a search has returned. It may be exact or approximate. Approximation is due to dynamic check for permissions to view each page in the results, some results may not be shown to the user with no adequate permissions event if it matches the search term.
- **Tools** - these are located in the top right as a set of buttons:
  - Create a page - represented by a "plus" button - will create a page with current search term as a title (only visible if user has permission to create pages)
  - Add filters - represented by a "funnel" icon - opens a dialog where users can select the type of filter to apply to the search.

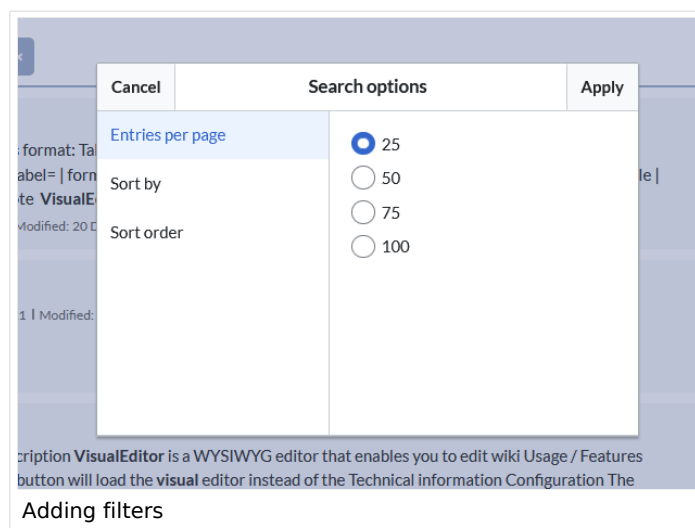

- Search options - represented by a "gear" icon - opens a dialog where users can change settings for the current search. It provides options like the number of results per page, sorting field and order.

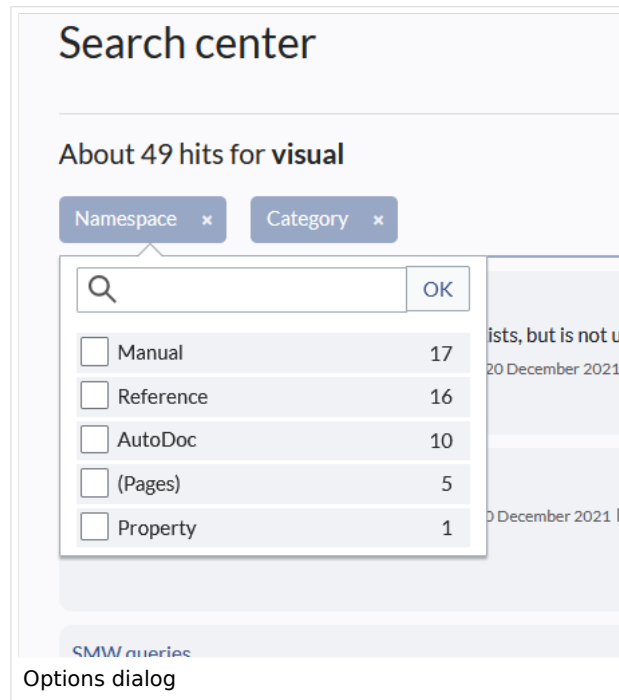

- Export search - represented by the "export" icon - opens a dialog to export current search results to a dedicated page (only visible to authorized users, by default admin users).
- **Filter:** Filters are displayed in form of pills below the results counter. Each filter pill represents a different attribute. Filter values can be changed by clicking on the filter pill and selecting the desired options from the popup that will open. Filter can be removed by clicking on the "x" button in each pill.

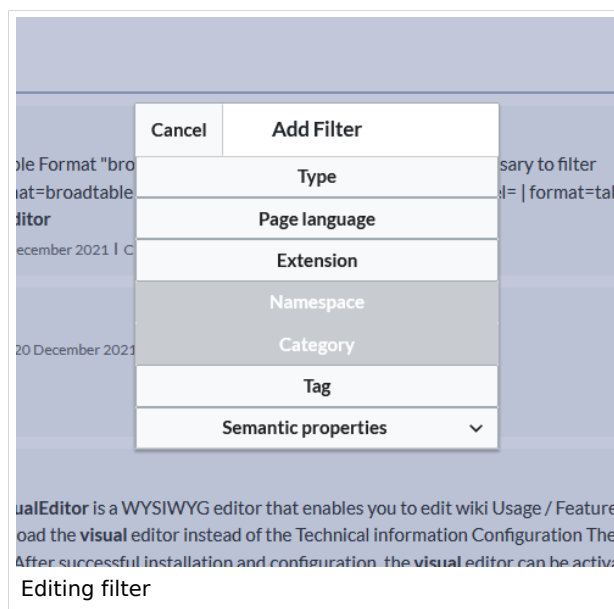

- **Results:** If current search criteria field any results, a list of results is displayed. The information available in the results is depending on the result type):
  - Main title of the result (page title, file name...)
  - Result type
  - Size and extension (for files)
  - Thumb image (for images) or file type icon (for other file types)
  - Redirect information



- Original name (for wikispaces, if the page display title is different than the actual page title)
- Secondary information like page categories, modification and creation date, author, etc.
- Snippet of the matches in the content of the page (if there are matches in the page content),
- Sections with matches in the content (for wikispaces)

In case there is an exact match for a given search term, the result that matches exactly is displayed as a "featured" result. Such a result displays a preview image of the page and always displays the content snippet, regardless of whether there are matches in the content or not.


## Results relevance

All logged-in users can mark certain results as "favorites" by clicking on the star symbol in the right corner of each result. Files marked as "favorite" will score higher in future searches - this is not visible immediately, however, but happens over time. One user's relevance settings won't affect other user's searches. Results can be unmarked as "favorite" by clicking on the "star" symbol again.

## Exporting search results

After executing the search, administrators can export (save) the results to a specific page using the "Export" command from the "Tools" menu. The list is exported to *MediaWiki:PageCollection /LISTENNAME*.

Only valid wikispaces are exported. The pages contained in a list can be included in a book in the book function via *Mass add> Source: Page collection*.

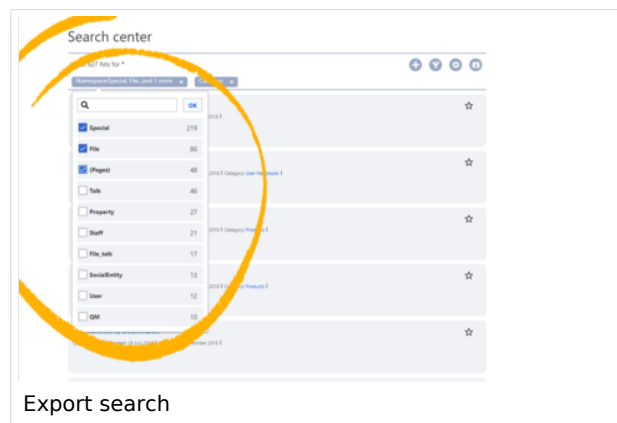

## Configuration



In the [BlueSpiceConfigManager](#), under settings for the extension *BlueSpiceExtendedSearch*, the following configuration options are available:

- **External file paths:** External locations to scan for and index files from. These locations are entered in key/value pairs of Physical path and URL prefix.
  - *Physical path:* Storage path. For mounted drives, for example: *X:|Documents*

- ## Examples for external file paths

The screenshot shows the 'Feature' settings page for 'BlueSpiceExtendedSearch'. The 'Searching and Navigation' feature is selected. The 'External file paths' section is expanded, showing a 'Physical path' of 'S:\' and a 'URL prefix' of 'file:///S/'. A blue checkmark and a red circle with the number '1' are next to the 'URL prefix' field. A red circle with the number '2' is next to the 'Save' button.

- Page 10 of 59

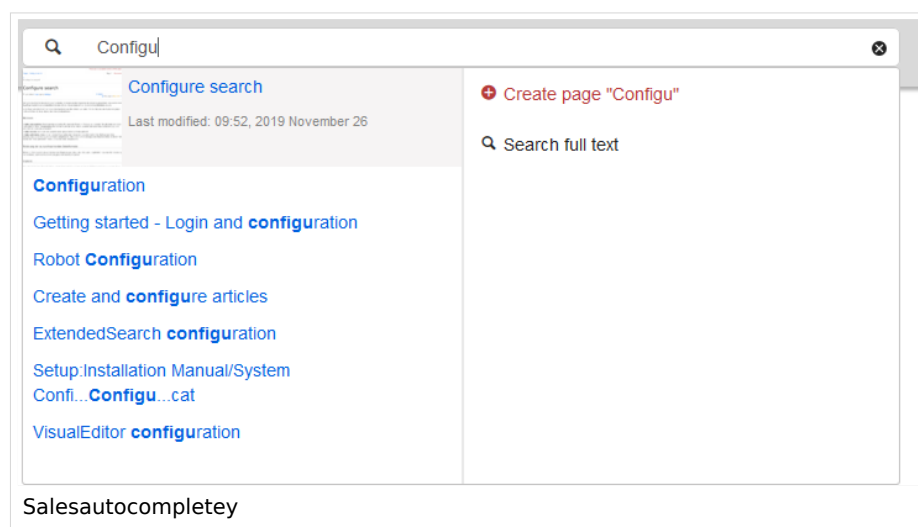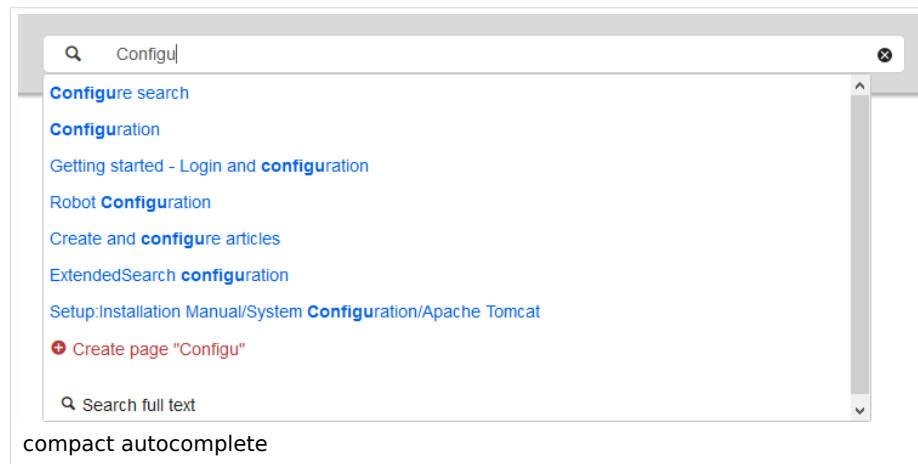

- **Automatically set language filter:** The search only returns pages whose language (PageLanguage) is identical to the user language (Language). Users can set their language in their [preferences](#). By default, the language of content pages is the same as the installation language (ContentLanguage) of the wiki. Some extensions can set the language of individual pages independently of the content language of the wiki.. (See: [https://www.mediawiki.org/wiki/Manual:Language#Page\\_content\\_language](https://www.mediawiki.org/wiki/Manual:Language#Page_content_language)). In many wikis, activating this filter has little effect.
- **Exclude patterns:** Files at external file locations can be excluded from search based on regular expression patterns.

## SearchAdmin

*Special:SearchAdmin* is a special page for wiki admins and shows the number and types of indexed documents.{{Box Links-en|Topic1=

➔ [Technical Reference: BlueSpiceExtendedSearch](#)

## Config manager

### Contents

1	Layout	13
1.1	Filter options	13
1.2	Searching for settings	13
2	Settings by extension	14
2.1	EventBus	14
2.2	EnhancedUpload v4.3+	14
2.3	BlueSpiceFoundation	14
2.3.1	Updating logo and favicon	14
2.3.2	System	16
2.4	BlueSpiceArticleInfo	16
2.5	BlueSpiceAuthors	17
2.6	BlueSpiceAvatars	17
2.7	BlueSpiceBookshelf	18
2.8	BlueSpiceChecklist	19
2.9	BlueSpiceExtendedSearch	20
2.10	BlueSpiceExtendedStatistics	22
2.11	BlueSpiceInsertCategory	22
2.12	BlueSpiceInsertLink	22
2.13	BlueSpicePageTemplates	23
2.14	BlueSpicePermissionManager	24
2.15	BlueSpiceRSSFeeder	24
2.16	BlueSpiceReaders	24
2.17	BlueSpiceSaferEdit	25
2.18	BlueSpiceUEModuleBookPDF	25
2.19	BlueSpiceUEModuleHTML	25
2.20	BlueSpiceUEModulePDF	26
2.21	BlueSpiceUniversalExport	26
2.22	BlueSpiceVisualEditorConnector	26
2.23	BlueSpiceWholsOnline	27
2.24	BlueSpiceExpiry	27
2.25	BlueSpiceFlaggedRevsConnector	27
2.26	BlueSpiceSocial	29
2.27	BlueSpiceSocialBlog	29
2.28	BlueSpiceSocialTopics	30
3	BlueSpiceDiscovery	30
3.1	Deactivating the Entrypoint links	30
3.2	Positioning of skin elements	31
3.3	Content Stabilization v4.3+	31


With the Config manager, a wiki user with *sysop* rights can manage wiki-wide settings in one place. In the [navigation](#), it is located at *Global navigation > Management > Configuration*. This link loads the page *Special:BluespiceConfigManager*.

## Layout

### Filter options

All settings can be accessed through the following filter options:

- **Feature:** group by type of functionality the setting belongs to (search, administration...)
- **Extension:** group by extension name
- **Package:** group by BlueSpice edition and services (BlueSpice free, BlueSpice pro, Matomo)

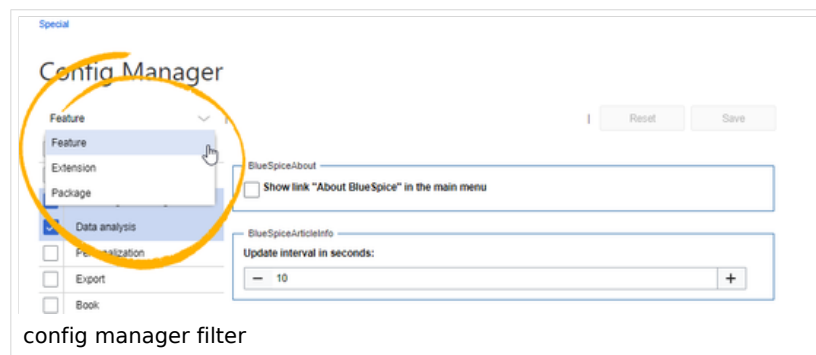


All settings are available in any type of grouping. Changing the grouping type does not add or remove setting options. It just groups them differently. After settings are adjusted, they can be saved by clicking *Save*, or cancelled by clicking *Reset*.

**Note:** If a server administrator has configured a setting to no longer be writable, it will be shown as greyed-out in the config manager. You will have to talk to your server administrator about changing such a setting.

### Searching for settings

A search bar is located above the list of settings. Type in a keyword such as "logo" to find the corresponding setting. The search returns settings regardless of the currently selected group.

**Note:** The search field has to be empty if you want to see the filter menu instead of the search.

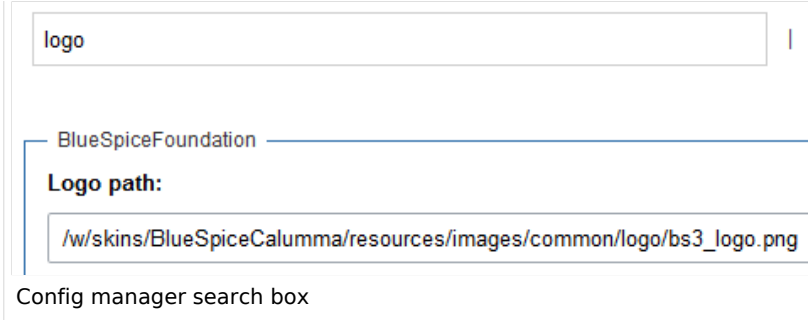

Config manager search box


## Settings by extension

### EventBus

Eventbus sends notifications to external urls in case something happens in the wiki. For example, if a page is created, an external service could then be started and create a pdf of that page. See the extension's page on [mediawiki.org](https://mediawiki.org).

### EnhancedUpload v4.3+

Sets the defaults for the [advanced image settings](#) when uploading and embedding an image into the wiki via drag-and-drop functionality. The default settings determine the orientation, type, and size of the image. These can be adjusted after embedding via the "Advanced settings" of the image on the page.

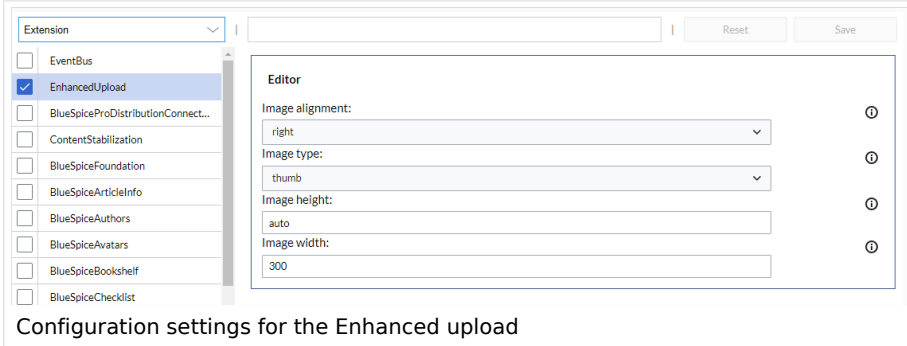

Configuration settings for the Enhanced upload

## BlueSpiceFoundation


### Updating logo and favicon

**Note:** Since BlueSpice 4.2, the logo and favicon can also be managed via the page [Special:Flexiskin](#) together with further skin customizations.


- **Logo path:** The logo image should be stored in the /images folder of your installation. If you store it in the /skins folder of your BlueSpice installation, it could be overwritten with an upgrade.

**To upload the logo directly in the wiki:**

1. **Upload** the logo on the page from the menu *Global actions > File list (Special:ExtendedFilelist)*.
2. **Click** on the thumbnail image of the logo. This opens the logo on a separate page.

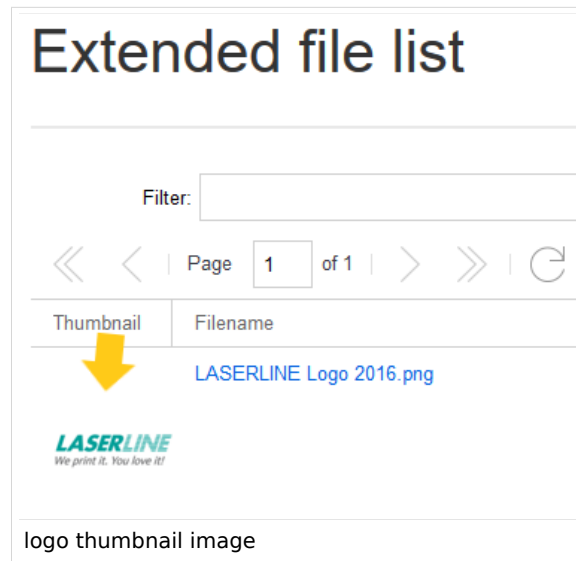

3. **Copy** the relative logo path from the address bar. In a typical Wiki configuration, this path starts with */w/....*

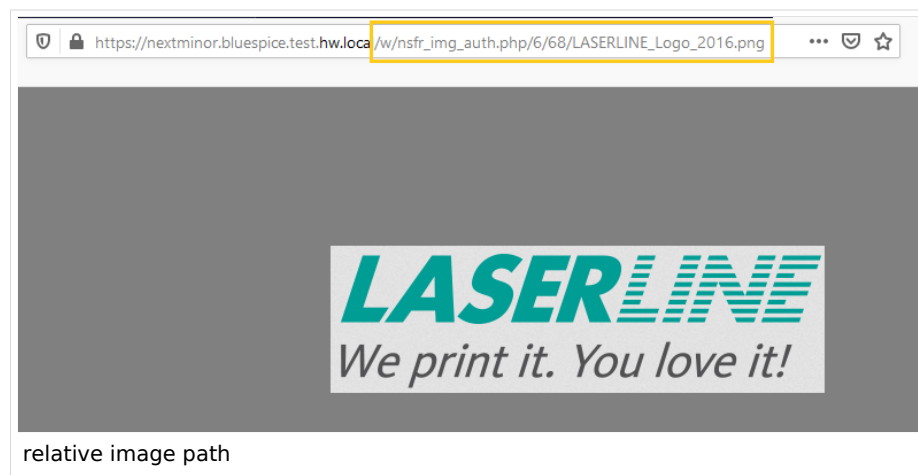

4. **Paste** the logo path into the text field for the logo.

Extension  |

☒ BlueSpiceFoundation

☐ BlueSpiceAbout

☐ BlueSpiceArticleInfo

☐ BlueSpiceAuthors

Skinning

**Logo path:**

**Favicon path:**

logo path

5. **Click Save.**

6. **Refresh** the page (Strg+F5).

If the uploaded logo is too large, you can add the following code snippet to the page *MediaWiki:Common.css*. This automatically adjusts the image to the height of the main toolbar:

```
.bs-logo a {background-size: contain;}
```

- **Favicon path:** The favicon image should be stored in the */images* folder of your installation. If you store it in the */skins* folder of your BlueSpice installation, it could be overwritten with an upgrade. [Favicon images](#) have the file extension *.ico*.

## System

- **Allowed file extensions:** For security reasons, the types of files that users can upload are restricted. Here, you can allow additional file formats. If a file format is blacklisted in the server configuration, adding this file extension here will not allow this file type to be uploaded. See [mediawiki.org/wiki/Manual:\\$wgFileExtensions](https://mediawiki.org/wiki/Manual:$wgFileExtensions) for more info.

### XML file type: v4.x++

The *xml* file type is blacklisted since MW 1.39 and has to be allowed in *LocalSettings.php*:


```
$GLOBALS['wgProhibitedFileExtensions'] = array_diff( $GLOBALS['wgProhibitedFileExtensions'] ?? [], [ 'xml' ] );  
$GLOBALS['wgMimeTypeExclusions'] = array_diff( $GLOBALS['wgMimeTypeExclusions'] ?? [], [ 'application/xml', 'text/xml' ] );
```

- **Allowed image extensions:** The standard web image types are listed here. In general, you want to restrict image uploads to web images. See [developer.mozilla.org/en-US/docs/Web/Media/Formats/Image\\_types](https://developer.mozilla.org/en-US/docs/Web/Media/Formats/Image_types) for more on browser-supported image types.


## BlueSpiceArticleInfo

*BlueSpiceArticleInfo*, together with *BlueSpiceAuthors*, *BlueSpiceReaders*, and *BlueSpiceExtendedSearch* is part of the *Page information* in the quality management tools.

- **Update interval in seconds:** Sets the refresh rate for the "Last edit" value. By default, this date is updated every 10 seconds via JavaScript.






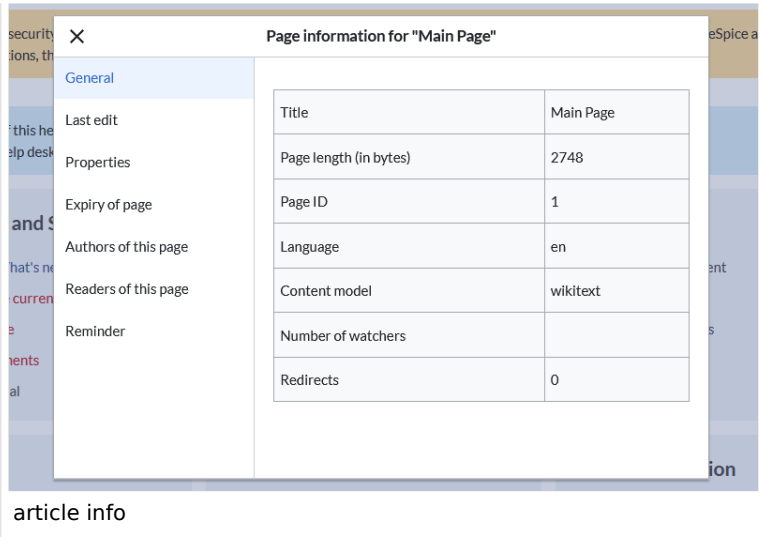

BlueSpiceAuthors

BlueSpiceAuthors, together with BlueSpiceArticleInfo and BlueSpiceReaders, is part of the Page information in the quality management tools.


- **Display authors:** Show or hide authors on the page information page.

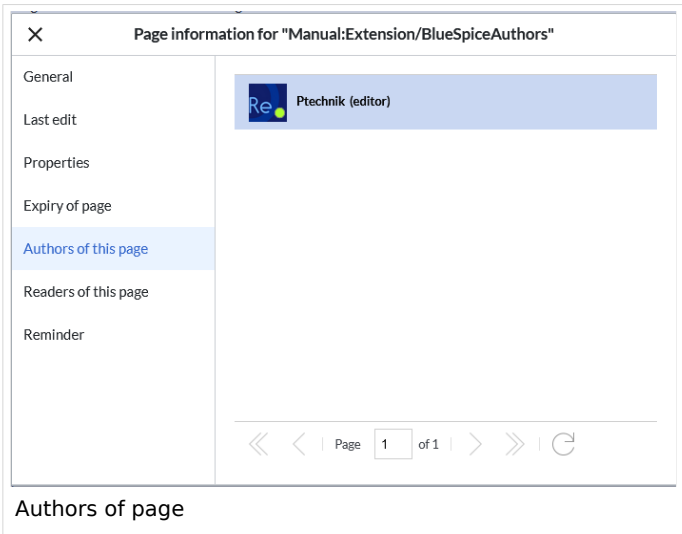


BlueSpiceAvatars

An avatar image is automatically generated if the user does not upload a profile picture or if the user decides to create an avatar image in the preferences.

- **Generator**
  - **InstantAvatar:** Generates an avatar image based on using the initials of the Real name or the Username
  - **Identicon:** Generates an avatar image based on parts of the user's IP address.



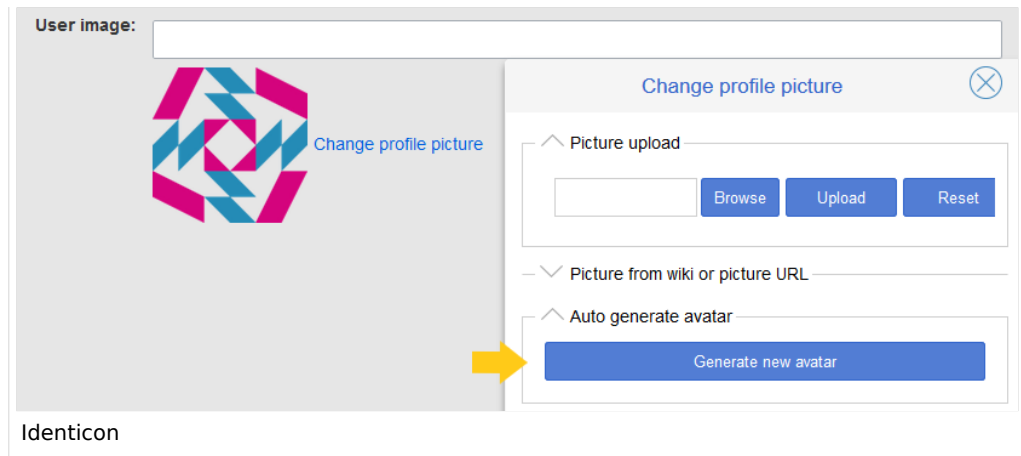

User image:

Change profile picture

Change profile picture

Picture upload


Picture from wiki or picture URL

Auto generate avatar

Identicon

## BlueSpiceBookshelf

- **Show book chapter pager after content:** Displays previous/next book page navigation at the end of each book page. (1)
- **Show book chapter pager before content:** Displays previous/next book page navigation at the beginning of each book page. (2)

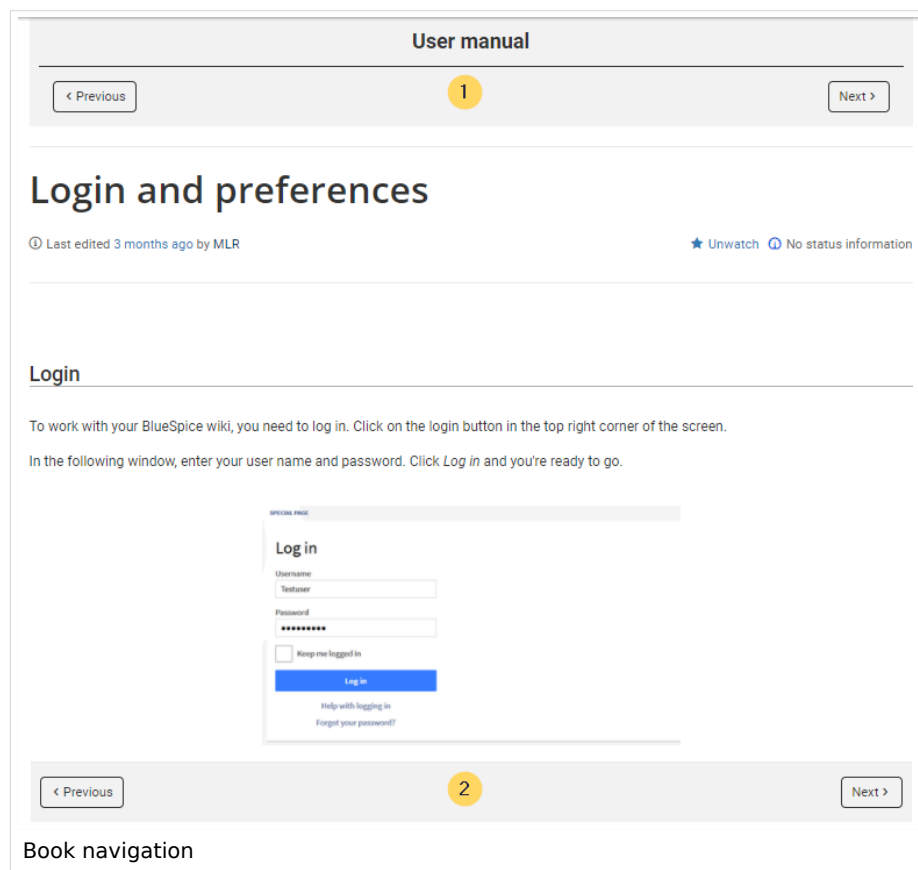

User manual

< Previous 1 Next >

## Login and preferences

① Last edited 3 months ago by MLR ★ Unwatch 🔔 No status information

### Login

To work with your BlueSpice wiki, you need to log in. Click on the login button in the top right corner of the screen.

In the following window, enter your user name and password. Click *Log in* and you're ready to go.

**SPECIAL PAGE**

**Log in**

Username  
Textarea

Password  
\*\*\*\*\*

☐ Keep me logged in


Help with logging in  
Forgot your password?

< Previous 2 Next >

Book navigation


- **Use the display title from book source on article:** Shows the title from the book navigation as page title instead of the page name.



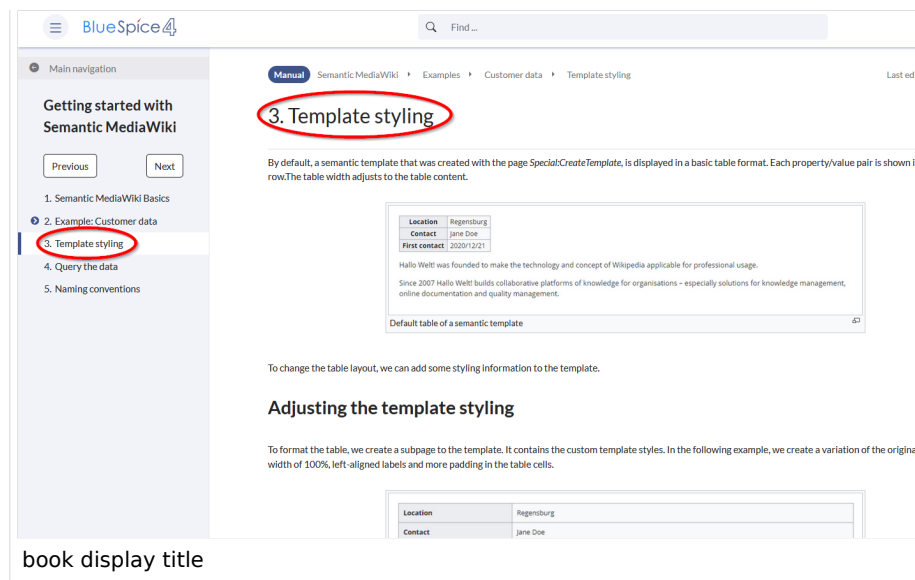

**Note:** If the page additionally contains a `{{DISPLAYTITLE}}` tag, the display title of the page is shown instead of the book title.

- **Prepend article table of contents and headlines with book numeration:** The page TOC does not start with the main heading 1, but with the actual number from the book chapter (see screenshot). If users have activated in their [user preferences](#) to "auto-number headings", the numbering system is matched accordingly.

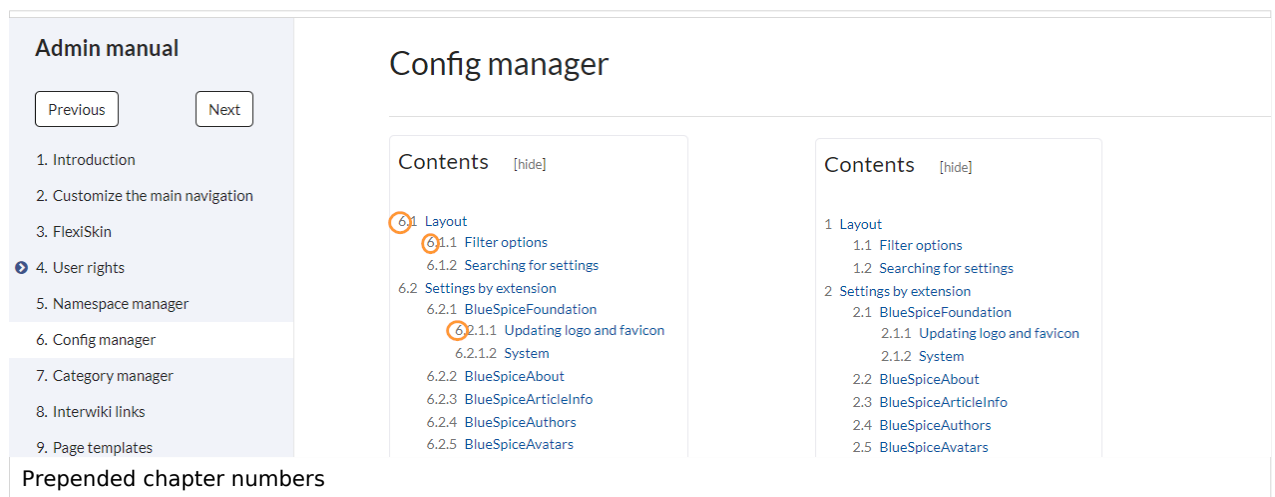

- **Supress namespace prefix of book articles in output:** The namespace prefix of an article is not shown in PDFs.

## BlueSpiceChecklist

- **Mark checklist changes as minor edit:** If this setting is active, changes to a checklist (for example, checking a checkbox) in view mode are logged as minor edits. If this setting is inactive, a change to the checklist is recorded as a regular version in the page history.

• (cur | prev) @ 12:01, 2019 December 5 ML Mlink-rodrique (talk | contribs | block) m  
(2,820 bytes) (+9) .. (Unchecked checkbox #1) (rollback 6 edits | undo) (Tag: Checklist change)

minor edit

## BlueSpiceExtendedSearch

- **External file paths:** External locations to scan for and index files from. These locations are entered in key/value pairs of Physical path and URL prefix.
  - *Physical path:* Storage path. For mounted drives, for example: *X:\Documents*
  - *URL prefix:* All files indexed from the indexed physical location are prefixed in the search results. It should be used if files are available from a web server. By default, the URL prefix is set to the same value as *Physical path*.

### Examples for external file paths

Example file	Phys. Path	URL Prefix	Link in results list
S:\Sales\Info\glossaryy.pdf	S:\	file:///S:/	file:///S:/Sales/Info/glossary.pdf
		https://sharepoint /Sales/ documents/	https://sharepoint/Sales/ documents/Sales/Info /glossary.pdf
		https://intranet /showdocs inline.aspx?path=	https://intranet/showdocsinline. aspx? path=/Sales/Info/glossary.pdf
/var/www/bluespice/w /mounted_ share/Sales/Info /glossary.pdf	/var/www /bluespice/w/ mounted_share/		https://wiki.company.local/w /mounted_ share/Sales/Info/glossary.pdf

Feature

☐ System
 ☐ Skinning
 ☐ Data analysis
 ☐ Personalization
 ☐ Book
 ☐ Export
 ☐ Content structuring
 ☐ Quality assurance
 ☒ Searching and Navigation
 ☐ Editor
 ☐ Administration

BlueSpiceExtendedSearch

External file paths

No values set!

Add new entry

Physical path

S:\\*

URL prefix

file:///S:/

☐ Use simple autocomplete
 ☐ Automatically set language filter

Exclude patterns

No values set!

Add new entry

Physical path

\*

Exclude regular expression pattern

\*

2

Save

Add an external file path: (1) confirm the checkmark and (2) save the settings.

- **Use simple autocomplete:** forces a more compact autocomplete (1-column Sales thumbnail preview).

Configu|

Configure search

Configuration

Getting started - Login and configuration

Robot Configuration

Create and configure articles

ExtendedSearch configuration

Setup:Installation Manual/System Configuration/Apache Tomcat

Create page "Configu"

Search full text

compact autocomplete

Configu|

Configure search

Last modified: 09:52, 2019 November 26

Configuration

Getting started - Login and configuration

Robot Configuration

Create and configure articles

ExtendedSearch configuration

Setup:Installation Manual/System

Conf...Configu...cat

VisualEditor configuration

Create page "Configu"

Search full text

Salesautocompletey

19.04.2024

This document was created with BlueSpice

Page 21 of 59

- **Automatically set language filter:** The search only returns pages whose language (PageLanguage) is identical to the user language (Language). Users can set their language in their [preferences](#). By default, the language of content pages is the same as the installation language (ContentLanguage) of the wiki. Some extensions can set the language of individual pages independently of the content language of the wiki.. (See: [https://www.mediawiki.org/wiki/Manual:Language#Page\\_content\\_language](https://www.mediawiki.org/wiki/Manual:Language#Page_content_language)). In many wikis, activating this filter has little effect.
- **Exclude patterns:** Files at external file locations can be excluded from search based on regular expression patterns.

## BlueSpiceExtendedStatistics

- **Exclude these users:** Some user groups, like WikiSysop can skew the statistics, for example the statistics for search queries or because they complete automated maintenance tasks. These types of user groups can be excluded from the statistical results.
- **Maximum number of interval steps:** Sets the size of the x-axis for the results. For a few days, select the interval *Day* or *Calendar Week*, for periods over one year, select *Year* or *Month*. If you do not get any results for your query, try to adjust the interval accordingly.

## BlueSpiceInsertCategory

- Insert category with its parent categories
- Preset categories of a page in the upload dialog

## BlueSpiceInsertLink

- **Allow unmapped links:** if there is no prefix in the map, the link will still be inserted. Example: S:\HR. If this setting is unchecked, the link will not be inserted.
- **Allowed locations for external files:**

Example file	Filesystem prefix	Web accessible Prefix	Link output
S:\Sales\Info\glossaryy.pdf	S:\	file:///S:/	file:///S:/Sales/Info/glossary.pdf
		https://sharepoint/Sales/documents/	https://sharepoint/Sales/documents/Sales/Info/glossary.pdf
		https://intranet/showdocs inline.aspx?path=	https://intranet/showdocsinline.aspx? path=/Sales/Info/glossary.pdf
/var/www/bluespice/w /mounted_			

Example file	Filesystem prefix	Web accessible Prefix	Link output
share/Sales/Info/glossary.pdf	/var/www /bluespice/w/ mounted_share/		https://wiki.company.local/w/mounted_ share/Sales/Info/glossary.pdf

When a new entry is added, it has to be confirmed by clicking the checkmark next to it before saving the page.

InsertLink configuration options

## BlueSpicePageTemplates

- Force target namespace:** The page is always created in the target namespace that is associated with the template, even if the user provided a different namespace prefix. In the screenshot below, the user wants to create the page "NewPage" and then selects a template for the QM namespace. The page is, therefore, created as "QM:NewPage" if this setting is activated.

force the namespace of the template

- Hide default templates:** Hides the default *Empty page* template.


- **Hide template if the page is not to be created in the target namespace:** Depending on the namespace prefix of the page to be created, templates that are associated with other namespaces will not be shown to the user for selection.

## BlueSpicePermissionManager

- **Backup limit:** Sets the number of backups for the permissions manager. Each time the page *Special:PermissionManager* is saved, a backup is created. If the backup limit is set to 5, the last five versions of the permissions configuration are saved as backups.

## BlueSpiceRSSFeeder

- **URL whitelist:** RSS feeds need to be whitelisted here by an administrator before they can be displayed in a wiki page.
- **Maximum number of allowed redirects:** If there are URL redirects for any of the whitelisted URLs, the number of redirects needs to be adjusted (usually to 1 or 2).

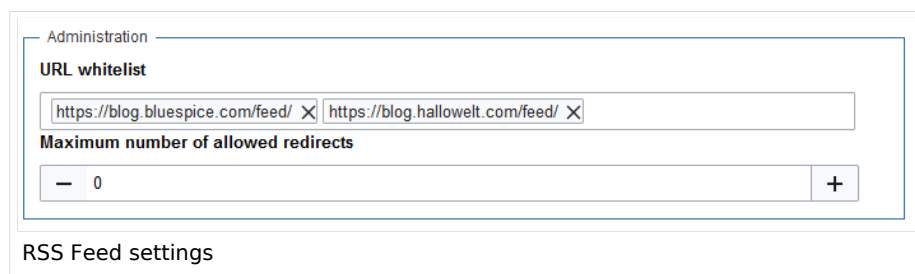

Administration

URL whitelist


Maximum number of allowed redirects

+

RSS Feed settings

## BlueSpiceReaders

- **Number of readers to display:** Sets the number of readers that are displayed on the Page information in the Quality management tools.

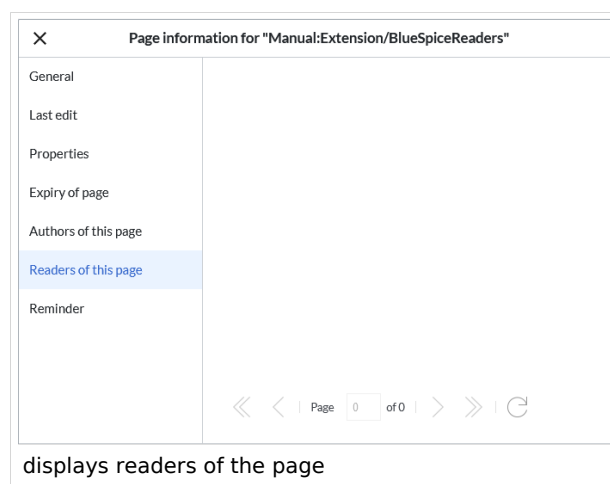

Page information for "Manual:Extension/BlueSpiceReaders"

General

Last edit

Properties

Expiry of page

Authors of this page

Readers of this page

Reminder

Page 0 of 0

displays readers of the page



## BlueSpiceSaferEdit

- **Interval for lookup for concurrent editings:** Sets the time in seconds for checking if another person is editing the page.
- **Show name of current editor:** Shows or hides the name of the user who is currently editing the page.

## BlueSpiceUEModuleBookPDF

- Table of Contents
  - *Only article titles (indent by grade):* Only shows the article titles in the main contents table of the PDF.

Table of contents	
1 Introduction .....	3
2 Wiki pages model .....	4
3 User rights .....	7
3.1 Group manager .....	15
3.2 Permission manager .....	18
3.3 User manager .....	24
4 Namespace manager .....	28

PDF table of contents without article TOCs

- *Embed article TOCs (No indent of article titles):* Shows the table of contents for each article in the main contents table of the PDF.

Table of contents	
1 Introduction .....	5
2 Wiki pages model .....	6
1 The pages modell .....	6
2 Page types .....	6
2.1 Special page .....	6
2.2 Content page .....	7
2.3 Wiki page .....	7
2.4 Category page .....	8
2.5 File / image (description) page .....	8
3 User rights .....	9
3.1 Group manager .....	17
1 Accessing the group manager .....	17
2 Functionality .....	18
3 Assigning roles and users to groups .....	18

Embed article TOCs


## BlueSpiceUEModuleHTML

- **Hide namespace prefix in HTML:** If activated, the namespace is shown in the HTML main heading.

**Note:** If the page contains a "displaytitle" tag in the page source, the page display title is shown and this setting has no effect.

## BlueSpiceUEModulePDF

- **Hide namespace prefix in PDF:** If activated, the namespace is shown in the PDF main heading for a page.

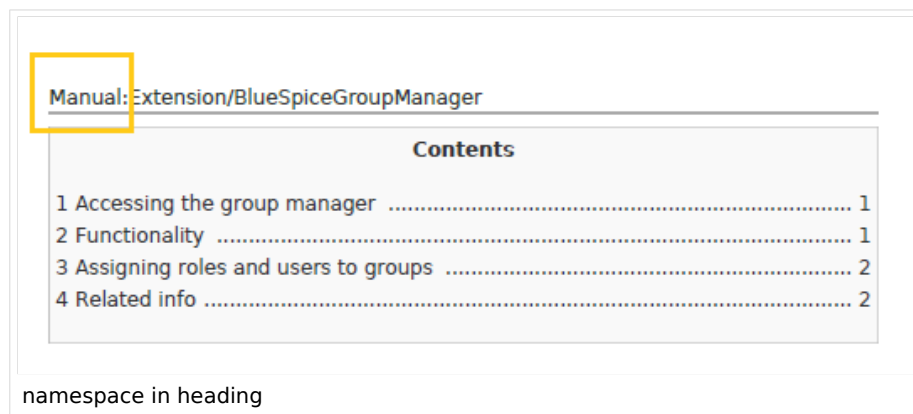

**Note:** If the page contains a "displaytitle" tag in the page source, the page display title is shown and this setting has no effect.

## BlueSpiceUniversalExport

- **Metadata (standard, JSON):** Additional data to be passed to the rendering template in JSON format. This data can be used in the export template. The template itself is maintained server-side.
- **Metadata (override, JSON):** Allows overriding standard data sent to the rendering template in JSON format. Values that are set by default can be overridden with this option.

## BlueSpiceVisualEditorConnector


- **Enable VisualEditor for BlueSpice extensions**
- **Configuration variable to use a simplified save process**
- **Upload type**
  - Original (Here a confirmation of the rights of use/upload is obtained, file name and namespace of the file can be changed, a category can be assigned and a description of the file **MUST** be given).
  - Simple (No confirmation of required rights is obtained here, the name and namespace of the file can be changed, a description and a category can be assigned, but does not have to be specified)
  - One click (No confirmation about required rights is obtained here, the image cannot be renamed and no category can be assigned. Only the namespace can, but does not have to be adjusted before uploading)

## BlueSpiceWholsOnline

- **Time in seconds until a user is marked as offline:** The system checks every  $x$  seconds if a user logged out and no longer displayed as online. This can be less frequent than the update interval for newly logged-in users.
- **Update interval in seconds:** The system checks every  $x$  seconds for users.

## BlueSpiceExpiry

- **Show watermark for expired pages in PDF:** Shows the watermark for expired pages in PDFs.
- **Show watermark for expired pages in print version:** Shows the watermark for expired pages when a page is printed.
- **Show watermark for expired pages:** Shows a watermark on the page itself.

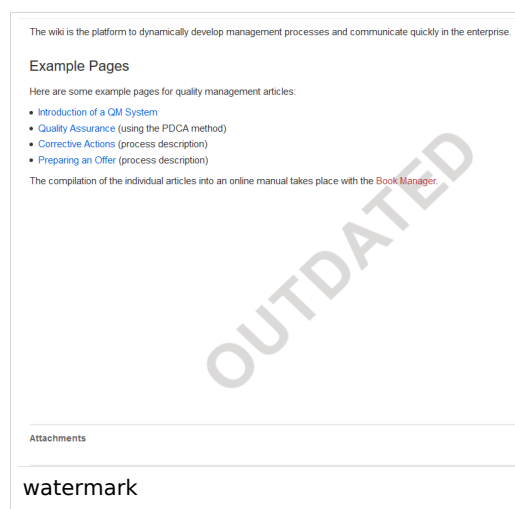

## BlueSpiceFlaggedRevsConnector




BlueSpiceFlaggedRevsConnector is available up to BlueSpice 4.2.

## Export

The export settings affect how the pages of a book are generated in the PDF export.

- **Bookshelf: List approved revisions log:** Shows a log of stable page versions of pages in the PDF and when these pages were put into accepted status. If editors did not provide a comment when accepting the page, the *Stable comment* field for a revision is empty.



Stable date	Page	Stable comment
18.11.2019	Permission matrix	
18.11.2019	Permission matrix	
15.11.2019	Wiki pages model	
14.11.2019	Permission manager	
14.11.2019	Group manager	

accepted revisions log

- **Bookshelf: List pages without stable revision:** Displays a list of PDF pages at the beginning of the PDF that only exist as a first draft and have no released version.

<p><b>Not stable pages</b></p> <hr/> <p><b>QM:Checklists</b></p> <hr/> <p>Pages without acceptance feature</p>
--

- **Bookshelf: List pages without FlaggedRevs:** Displays a list of PDF pages that do not have a release mechanism at the beginning of the PDF.

<p><b>Not FlaggedRevs namespace</b></p> <hr/> <p>Introduction</p> <p>Wiki pages model</p> <p>User rights</p> <p>Group manager</p> <hr/> <p>Pages with no FlaggedRevs feature.</p>
---

- **UEModulePDF: Show FlaggedRevs info below main heading:** Prints the latest revision dates (last acceptance and last edit date) below the heading.

<p><b>Introduction</b></p> <hr/> <p><i>Stable: 06.12.2019 - 12:00 / Revision: 06.12.2019 - 11:43</i></p> <hr/> <p>FlaggedRevs info below heading</p>
--

## Quality assurance

- **Include handling:** If resources are embedded in a page and those resources are located in namespaces with approval mechanism, then the following settings can be selected. For example: If an approved page contains a template or a file that has been changed after the page itself has been approved, the page will not get another draft version, but instead one of two configurations applies:
  - Current versions: Always show the latest version of the embedded resource.
  - Stable versions: Always show the stable (=approved) version of a resource.
- **Show unstable pages for following groups:** If the group *user* is removed from the *BlueSpiceFlaggedRevs* configuration, users in this group will not be able to see draft versions when they are added as reviewers in a review process. When the group *user* is removed, only *sysop* and *reviewer* users can access drafts. If you want other groups, for example *editor*, to see draft versions, you need to add them to the configuration. If no user groups are specified in the configuration field, not even reviewers and sysops users will see a visual status indication of a page. They will have access to drafts through the revision history for the page instead.

## Searching and Navigation

- **Indexing only stable versions:** Draft versions are excluded from the search results. If a page does not have a stable version, it is not shown as a search result.

## BlueSpiceSocial

- **Show endpoint "Timeline":** Shows a link to the page *Special:Timeline* in the main navigation.

## BlueSpiceSocialBlog

- **Use teaser text for blog entries in the timeline:** When you create a blog entry, you can create a teaser text for it by clicking the cogwheel symbol in the blog entry form. If this setting is active, the teaser text will be shown on the page *Special:Timeline* instead of the first part of the content.


The screenshot shows a form for creating a blog entry. The form has a title field with the text "ISO 7010 Symbole". Below the title is a content field with a rich text editor. The content field contains a message about ISO 7010 graphics standards. Below the content field is a "Teaser" field, which is highlighted with a red circle. The "Teaser" field contains the text "Pages in violation of ISO 2010 graphics standards will be expired". Below the "Teaser" field is a "Main Page" button. At the bottom right of the form is a gear icon, which is also highlighted with a red circle, and buttons for "Cancel" and "Post".

blog teaser text


- **Show endpoint "Blog":** Shows a link to the page *Special:Blog* in the main navigation.

## BlueSpiceSocialTopics

- **Automatically create all discussion pages.** If a user creates the first discussion topic for a page using the link in the page footer of a wiki page, the needed discussion page is automatically created first.

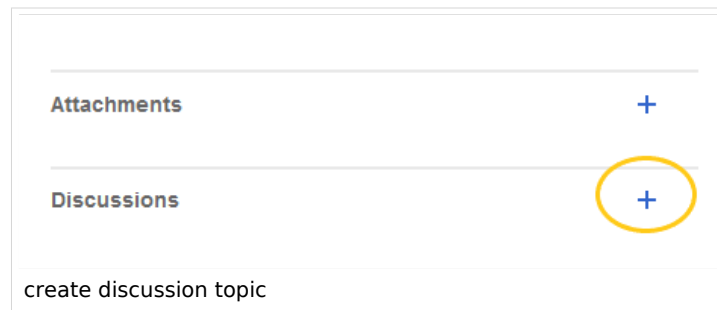


A message "This discussion page was created automatically" is inserted on the discussion page.

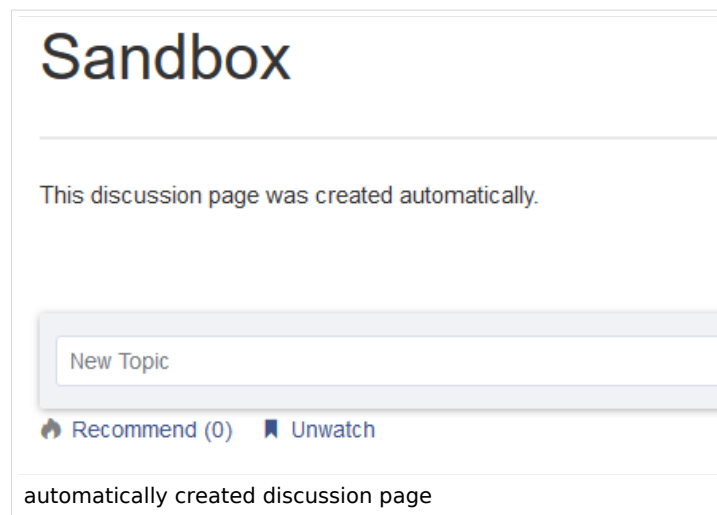

If this setting is deactivated, the user is directed to the "Create page" default page first.

## BlueSpiceDiscovery

### Deactivating the Entrypoint links

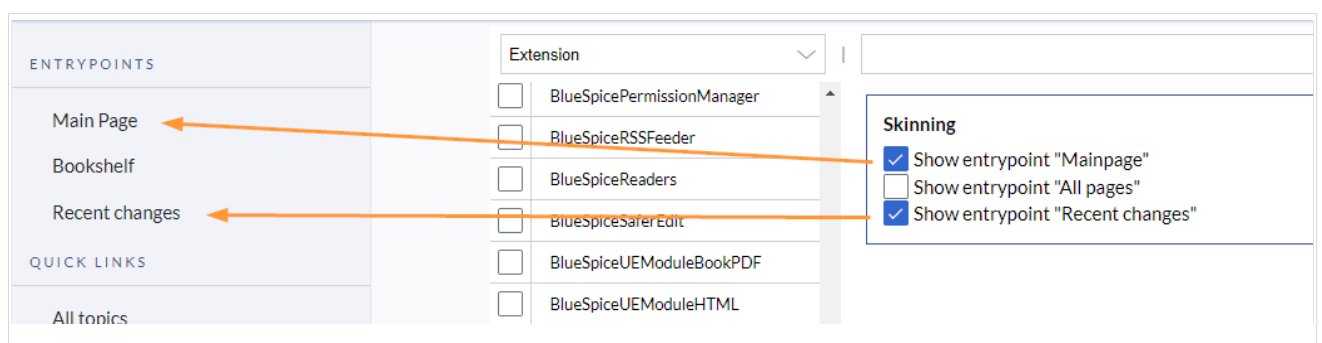

## Positioning of skin elements

Elements below the page title ⓘ

page-sentence X

Elements below the page content ⓘ

categories X rating X recommendations X

positioning skin elements

- page-sentence: display of page status ([Approval status](#), [Expiry](#))
- categories: display of [page categories](#)
- rating: display of [page ratings](#)
- recommendations: display of [page recommendations](#)

## Content Stabilization v4.3+

The following configuration options are available for page approvals:

- **Include handling (1):** Wenn Ressourcen in eine Seite eingebettet sind **und sich diese Ressourcen in Namensräumen mit Freigabe befinden**, können die folgenden Einstellungen ausgewählt werden. Es gibt zwei mögliche Einstellungen:

	Verhalten
Stable versions of included pages	Shows the approved (stable) version of a resource, even if it was approved after the page that includes the resource was approved. (This works only if the resource is located in a namespace with active approval feature).
Versions that were current at the time of approval	Shows the version of the resource which was embedded at the time of the last approval of the wiki page where it is embedded. (This works only if the resource is located in a namespace with active approval feature).

For example, if an approved page contains a template that was modified after the page itself was approved, the page will not show a draft version. Approvals work directly via the embedded resource.

- **Allow viewing of first draft version (2):** If this setting is activated, then all users with read rights can view the first draft. When disabled, only groups from the "Show unstable pages for following groups" setting can see first drafts.
- **Update semantic properties from stable pages only (3):** The property value of the page is read from the stable version of the page and not from the draft version.
- **Entwurfseiten für folgende Gruppen anzeigen (4):** If the group `user` has been removed from the configuration, users in this group will not be able to see draft versions when they are added as reviewers in a review process. In this case, only users with the roles `sysop` and `reviewer` can access drafts unless other groups are specified. These system groups can only access drafts through the site's version history.

➔ [Technical Reference: BlueSpiceConfigManager](#)

## Social Wiki

**BlueSpiceSocial** is a set of extensions that add social features around a wiki page. It allows users to quickly communicate on the wiki and to express their opinion on pages.

### Contents

1 Scope .....	33
2 User profile .....	33
3 Discussions .....	34
4 Timeline .....	34
4.1 Creating new entries .....	34
4.2 Interacting with social entities .....	34
5 Blog .....	35
6 Permissions .....	35
7 Deactivating the comments feature .....	35
8 Related info .....	36



## Scope

BlueSpice Social contains the following functionality:

- **User profile:** Provides the page *User:<username>*.
- **Attachments:** Connects uploaded files to wiki pages.
- **Discussions:** Enables discussions with comments created on wiki pages. Discussion entries can be marked as "closed".
- **Activities:** Automatically creates pages in the *SocialEntity* namespace to track page edits and creations.
- **Blog:** Provides the special page *Special:Blog*. A blog view can also be embedded into individual wiki pages.
- **Microblog:** Similar to blog entries, but without a headline.
- **Timeline:** A chronological list of all social entities. The timeline filter can be used for displaying social entities on wiki pages.

## User profile

Every user has a profile that is displayed on the page *User:<username>*. Users can access their user profile by clicking on *Profile* in the user menu (located in the [header bar](#)).

The user profile shows the user's basic information (depending on the wiki setup) and the user's profile image.

Below the user info, the user's wiki activities are listed: Comments the user made, actions on pages, and in general the user's activity on the wiki. It also allows other users to leave comments on the user's profile page.

The screenshot displays a user profile for Sarah Naumann. At the top, there is a profile picture of a smiling woman. To the right of the picture, a table lists her details: Name (Sarah Naumann), Department (IT), Function (Senior Operations Engineer), Location (Ulm), and Telephone (+49 73 4860-94). An 'Edit' button is visible in the top right corner of this section. Below the profile information, there are four circular icons: a list, a funnel, a plus sign, and a refresh symbol. The main content area shows a comment by Greg Rundlett about BlueSpice, followed by a comment by Sarah Naumann. Sarah's comment includes a smaller version of her profile information table. At the bottom, a comment by Sarah Naumann is partially visible, mentioning 'Starker Kaffee'.

Name	Sarah Naumann
Department	IT
Function	Senior Operations Engineer
Location	Ulm
Telephone	+49 73 4860-94

Greg Rundlett über BlueSpice

Bei der EMWCon in Houston kam Greg Rundlett zu folgendem Ergebnis:BlueSpice is really the best option out there - I think globally - for MediaWiki Enterprise, MediaWiki hosting and support.

Comment (1) vor einem Monat • Sarah Naumann

Sarah Naumann

Name	Sarah Naumann
Department	IT
Function	Senior Operations Engineer
Location	Ulm
Telephone	+49 73 4860-94

vor einem Monat

Sarah Naumann commented "Starker Kaffee"

Die Pulvermenge steigt doch nicht linear mit der Wassermenge. Siehe zum Beispiel den

## Discussions

BlueSpiceSocial integrates a discussion section at the bottom of every wiki page. This section allows users to create comments directly on a wiki page. If it is the first entry in a discussion, the discussion page is automatically created at this time if this is configured in the [Configuration manager](#).

The discussion section can be disabled on the page-level by adding the [MagicWord](#) `__NODISCUSSION__` to the page in source editing mode.

## Timeline

Horst Schreiber commented "Greg Rundlett über BlueSpice"



Danke für den Hinweis! Eine Übersetzung wäre noch schön gewesen. Ich glaube auch nicht, dass jeder Leser schon versteht, was WebDAV bringt. Vielleicht kann man das noch etwas ausführlicher erklären?

vor einem Monat • Horst Schreiber

Recommend (0)

Greg Rundlett über BlueSpice



Bei der EMWCon in Houston kam Greg Rundlett zu folgendem Ergebnis: BlueSpice is really the best option out there - I think globally - for MediaWiki Enterprise, MediaWiki hosting and support.

Comment (1) vor einem Monat • Sarah Naumann

More ▾

Recommend (0) ▾

Maik Kalb commented "Starker Kaffee"



Naja. 6g Kaffee pro Tasse sagt die Anleitung. Und linear mit den Tassen steigt dann schon die Pulvermenge. Übrigens: Wer den letzten Kaffee rauspresst, sollte gleich neuen kochen.

vor einem Monat • Maik Kalb

Recommend (0)

Timeline

Timeline is a special page that provides an overview of all social conversations on the wiki.

By default, it is listed on the *Main navigation*. You can also access the page directly at [Special: Timeline](#). On this page, users can sort and filter existing social entries or create new entries.

## Creating new entries

To create a new entry, click on the "Plus" icon to add a new timeline entry:

- **Blog entry:** [Blog](#) is used for topics to be shared with other users on the wiki
- **Microblog:** Like a blog entry, but without titles. It should be used for a short entry, e.g., a quick announcement.
- **Discussion topic:** Adds a discussion entry to a particular wiki page.

## Interacting with social entities

Every entry in the timeline is called a social entity. Depending on the type of social entity, the following interaction options exist:

- **Comments:** Number of comments related to the entity. Clicking on *Comments* opens all current comments and allows users to add a comment (if user has the necessary permissions).

- **Recommend:** Number of users that recommended the entity. Users can add a recommendation by clicking on *Recommend*.
- **Linked articles:** Number of articles linked to this entity. Clicking on *Linked articles* shows the list of linked articles.
- **Watch/Unwatched:** Shows if the user is currently watching the entity (the user receives notifications when the entity is changed). Clicking on Watch or Unwatch changes the state of watching.
- **Resolved/Unresolved:** The status of the entity. Some entities, like discussions on a question, can have a status attached to them, so that other users know if the question is answered.

## Blog

**Blog** is a special page showing an overview of all blog entities available on the wiki. By default, it is listed on the *Main navigation*. You can also access the page directly at `Special:Blog`. Users can sort and filter the list entries by clicking on the icons above the list.

Learn how to [include the blog on any wiki page](#).

## Permissions

From BlueSpice version 3.2.7 the following roles have associated "social" permissions. Earlier versions have no option to limit the creation and editing of blog entries by using the role *commenter*.

Rechte/Rolle	commenter	editor	admin	maintenance-admin	Berechtigung
Create and edit blog entry		x	x	x	social-blog
Comment on blog entry	x	x	x	x	social-blog-comment
Create and edit microblog entry	x	x	x	x	social-microblog
Comment on microblog entry	x	x	x	x	social-microblog-comment
Create discussion entry	x	x	x	x	social-topics
Comment on discussion entry	x	x	x	x	social-topics-comment
Create and edit attachments	x	x	x	x	social-stash

The comments function for blog, microblog and discussion entries can be deactivated in the LocalSettings-file on the server.

## Deactivating the comments feature

The comment function for comments on blog, microblog and discussion entries can be deactivated in the LocalSettings file on the server.

```
$bsgSocialCanHaveChildrenBlacklist = [  
    'blog', // disable comments on blog  
    'topic', // diable comments on discussion topics  
    'microblog' // disable comments on microblogs  
];
```

Related info

- [Blog](#)
- [Discussions and Attachments](#)
- [Reference:BlueSpiceSocial](#)

 [Technical Reference: BlueSpiceSocial](#)

Personalization

Contents

1	<a href="#">Accessing preference settings</a>	38
2	<a href="#">User profile</a>	38
2.1	<a href="#">Basic Information</a>	38
2.2	<a href="#">Internationalisation</a>	38
2.3	<a href="#">Signature</a>	38
2.4	<a href="#">Email options</a>	38
2.5	<a href="#">WebDAV</a>	39
3	<a href="#">Appearance</a>	39
3.1	<a href="#">Skin</a>	39
3.2	<a href="#">Reading preferences</a>	39
3.3	<a href="#">Date format</a>	39
3.4	<a href="#">Time offset</a>	39
3.5	<a href="#">Files</a>	39
3.6	<a href="#">Diffs</a>	41
3.7	<a href="#">Advanced options</a>	41

3.8 Bookshelf special page .....	42
3.9 Context menu .....	42
3.10 Dashboards .....	43
3.11 Video player .....	43
3.12 Timeline .....	43
4 Editing .....	43
4.1 General options .....	43
4.2 Editor .....	44
4.3 Preview .....	45
4.4 Reminder .....	46
4.5 Timeline .....	46
5 Recent changes .....	46
5.1 Display options .....	46
5.2 Advanced options .....	47
5.3 Changes shown .....	47
5.4 Edit review .....	47
6 Watchlist .....	48
6.1 Edit watchlist .....	48
6.2 Display options .....	48
6.3 Advanced options .....	48
6.4 Changes shown .....	49
6.5 Watched pages .....	49
6.6 Token .....	50
7 Notifications .....	50
7.1 Email options .....	50
7.2 Notify me about these events .....	51
7.3 New message indicator .....	51
7.4 Notifications on namespace events .....	51
7.5 Notifications on categories .....	51
7.6 Review .....	51
8 Extended Search .....	51
9 Semantic MediaWiki .....	51
10 Resetting all preferences .....	52

## Accessing preference settings

---


1. **Click** on the user menu.
2. **Click** *Preferences*. This opens the preferences page with multiple tabs.

Alternatively, you can access the page *Special:Preferences* directly.

## User profile

---

### Basic Information

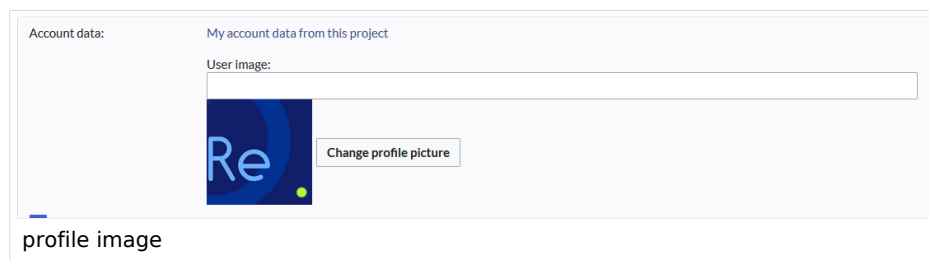

- **Real name:** This name is shown throughout the wiki. When users hover over your real name, your profile picture and contact information is shown.
- **Change password:** If your wiki is not connected with the central authentication system of your company, you can manage your password here.
- **User image:**
  - *User image* text field: Enter the webaddress of a picture on another website and click *Save* at the bottom of the page. The profile picture points directly to the external image:
  - *Change profile picture* link: Upload an image to the wiki. Click *Browse* and then *Upload* to create a new profile image. If you click *Generate new avatar*, the system generates a graphic instead.
- **Privacy policy** acceptance checkbox: Select and save this checkbox setting to confirm that you accept the privacy policy. Administrators can review this setting for all users on the page *Special:Privacy\_Admin*.

### Internationalisation

- **Language:** Users can change their personal language that is used in the layout and menus. BlueSpice currently supports de-formal-German (formal), de-German and en-English.
- **How do you prefer to be described?** Option for setting your gender preferences.

### Signature

- **Your existing signature:** shows a preview of your current signature including your profile info when you hover over the link.
- **New signature:** Enter a new name for your signature and save the *Preferences* page.
- **Treat signature as wikitext:** Your signature will be shown as text-only.

### Email options

If you provide an email address, you can specify to receive email notifications in addition or in place of wiki notifications. As long as the email address is not confirmed, the system will not send emails. This also affects the settings in the [Notifications](#) tab.

## WebDAV

This link is used as mounting path to your wiki. It only works if your server administrator has configured a WebDAV connection. By default, no WebDAV connection is configured.

## Appearance

---

### Skin

If your system has more than one skin installed, you can select one here. It only affects your view. All other users see the skin that is selected in their preferences.

### Reading preferences

**Page previews:** You can set if you want to see the first lines of an article as a tool tip before you click on a link. This functionality is provided by the extension [Popups](#).

### Date format

You can set how you would like to see the timestamp on wiki pages, for example the timestamp of a user signature on a discussion page.


[Rodrigue \(talk\)](#) 09:10, 3 December 2019 (CET)

### Time offset

- **Server time:** Shows the server time so that you can compare it to your local time.
- **Local time:** Shows the time set in the time zone setting.
- **Time zone:** When you select a time zone, your local time will be shown throughout the wiki wherever there is a timestamp.


### Files

- **Image size limit:** Sets the maximum size of the preview image on the file description page.





- **Thumbnail size:** Sets the size of the thumbnail image on a page if no custom size is specified in the image settings.
- **Enable Media Viewer:** If this checkbox is not selected, image links on a page will load the file description page rather than the media viewer overlay.

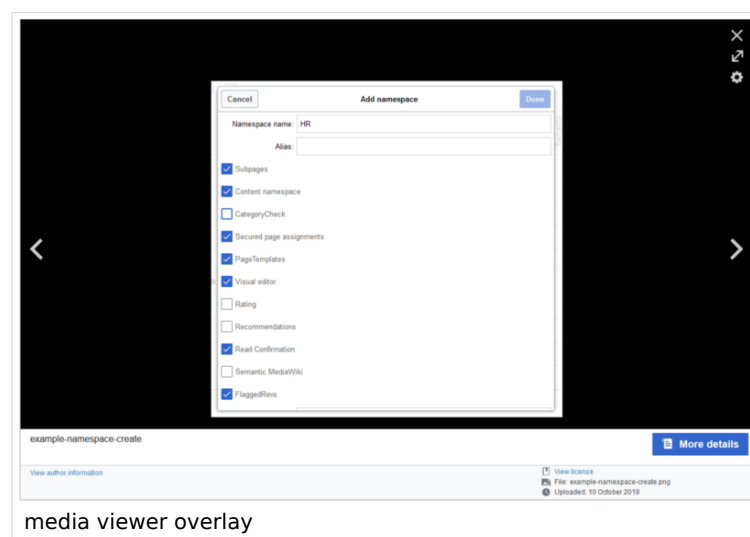




## Diffs

Diffs are a comparison view between different versions of a page. They are accessible from the version history of a page. You can select two versions for a comparison and then click *Compare selected revisions* to view the differences.

- **Do not show the page content below diffs:** Turns off the display of the current page preview below the differences view.
- **Don't show diff after performing a rollback:** After an administrator does a rollback of a page, the difference between the previous latest and the current latest version is shown by default. If turned off, the rollback loads the current page directly instead.
- **Don't show the revision slider:** By default there is a collapsed interactive graph of the revision history. This graph can be deactivated.

## Advanced options

- **Link underlining:**
  - *Always:* Underlines all links in the content area of a page, even if the selected skin specifies no underlining. The table of contents is not affected by this setting.

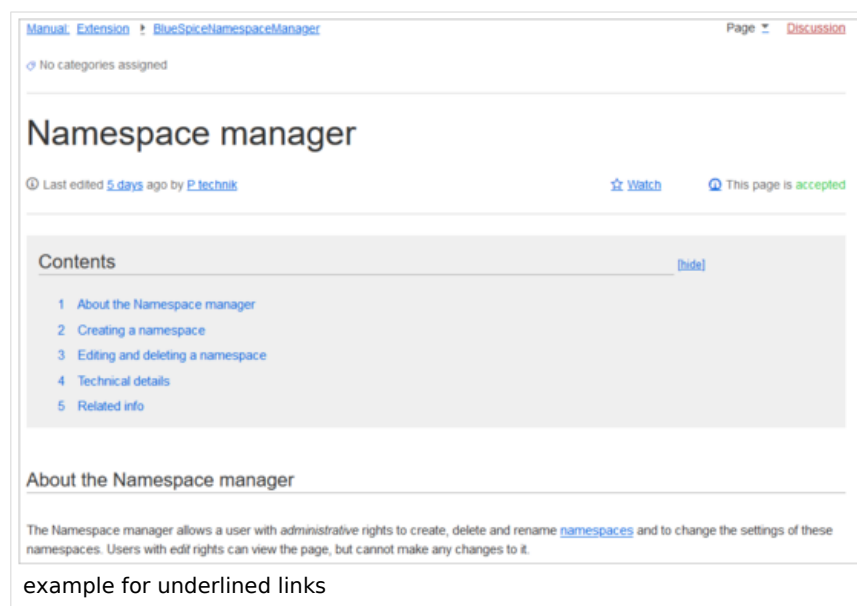

- *Never:* Never underlines links in the content area of a page, even if the selected skin specifies underlining.
  - *Skin or browser default:* Keeps the link settings as specified in the skin.
- **Threshold for stub link formatting:** Determines when the target page is considered short enough to change the link color to a page that fits the threshold criteria. If you choose 50 bytes, a link to a page with less than 50 characters (including wikitext), will be marked as a stub link and be shown in a different color. This only works if your wiki skin has a separate color value for stub links defined.
- **Show hidden categories:** The categories that a page is in are normally listed on the page. A category can be hidden from this list by adding the magic word `__HIDDENCAT__` to the category page. With this setting, a user can opt to show the hidden category anyway.
- **Auto-number headings -v4.3 :** Adds heading numbers to the page headings. **Note:** The heading numbers for books are set independently by administrators in the [Config manager](#).

## 5 Handling and storage

If caustic soda is left unsealed in the air, it will react with carbon dioxide and form a solid crust. Therefore, it must be stored in hermetically sealed containers.

### 5.1 Safe handling advice

- Use and open container with care.
- Avoid dust formation.
- Supply eye wash bottle.

### 5.2 Advice on protection against fire and explosion


- No special actions required.

- **Show a confirmation prompt when clicking on a rollback link:** If an admin user wants to perform a rollback of multiple options from the version history of a page, the rollback is executed immediately after clicking the link by default. With this setting, the admin user needs to click on the "Rollback" link again to confirm the rollback before it is executed.

## Bookshelf special page


**Grid:** Shows the details view (=list view) of available books by default (2)


**Images:** Shows the thumbnails view of available books by default (1)

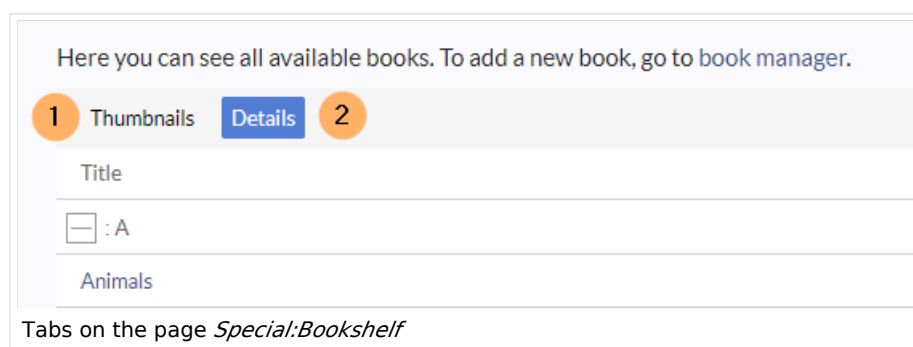

## Context menu

Page links in the content area of the wiki show a context menu that allows to perform actions on the target page without having to go to the target page first. You can set whether you want to show the context menu with *right-click* or with *right-click + Strg*.



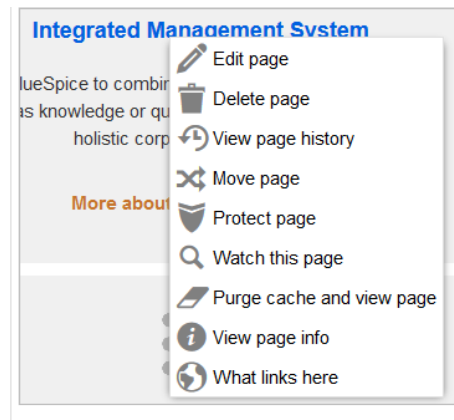

## Dashboards

By default, the logo of your wiki links to the main page. You can change this and link to your user dashboard instead.

## Video player

When a page contains a video that was inserted with the [BlueSpicePlayer](#) extension, you can set it to autoplay when you load a page.

## Timeline

You can set the timestamp on the timeline entries in date format or as age.

**Note:** It can take up to 24 hours for all timeline entries to show the new timestamp format. When you create a new entry, you should see the changed format immediately.




## Editing

### General options

- **Enable section editing by right clicking on section titles:** Right-clicking a section title with the mouse sets the page in edit mode. The specified section can be edited immediately.

- **Editing pages by double clicking (JavaScript):** Double-clicking on the page sets the page in edit mode. The double-click needs to be inside the text area of the page. Clicking in the title section of a page will not set the page into edit mode.
- **Enable the [Paragraph-based Edit Conflict Interface](#)** to resolve edit conflicts: Allows section-based merging of differences which improves the process for solving edit conflicts between users. If this setting is disabled: Users will see the source code of the latest version, a diff view between the latest and the own version, and a source diting window to manually work on the user's unsaved version.
- **Show the pending changes diff when editing pages:** In the BlueSpice 4 Discovery skin, no visual diff is shown during editing, so this setting can be ignored. It simply adds a duplicate notice about pending changes, when opening a page in edit mode:

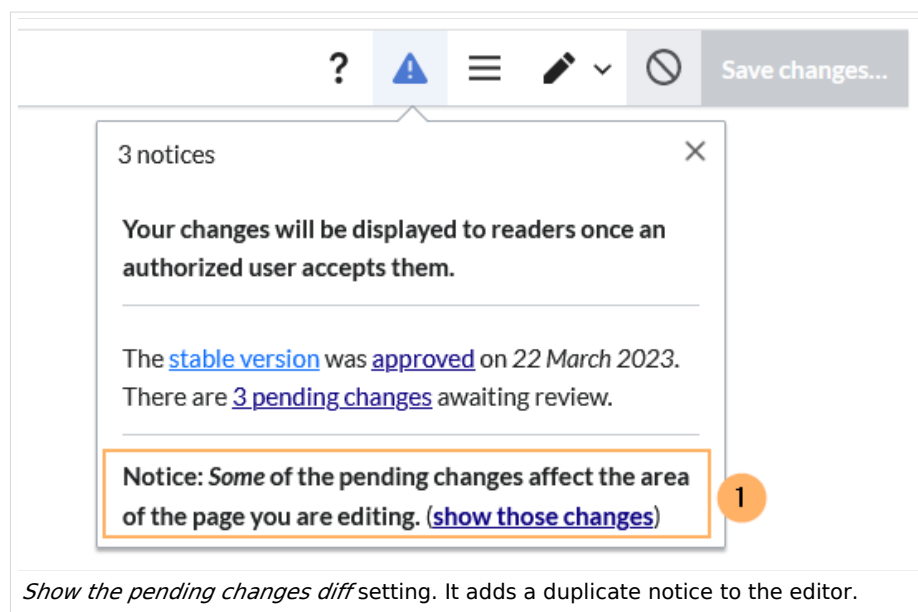


## Editor

- **Edit area font style:** Displays source code in monospace, serif, or sans-serif font.

**Note:** This setting is ignored if the [CodeMirror](#) extension is enabled (from BlueSpice 4.2).


- **Mark all edits minor by default:** This automatically sets the minor flag in the save dialog. It can be selected or deselected in the save dialog on the page itself:

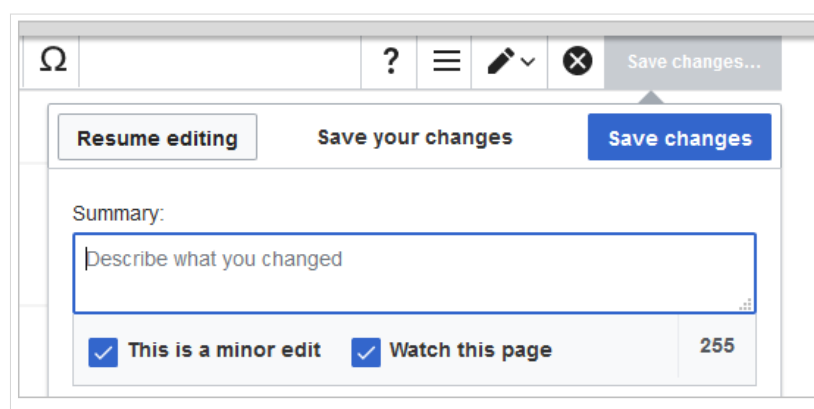

marking a minor edit

**Note:** Note: The 'Watch this page' checkbox in the save dialog can be activated or deactivated by default under the preferences tab *Watchlist* under *Advanced options: Add pages and files I edit to my watchlist*.

- **Prompt me when entering a blank edit summary:** Displays a text message when you click *Save changes* reminding you to enter a summary description. If you do not enter a description after that, the page will save without the summary the next time you click *Save changes*.

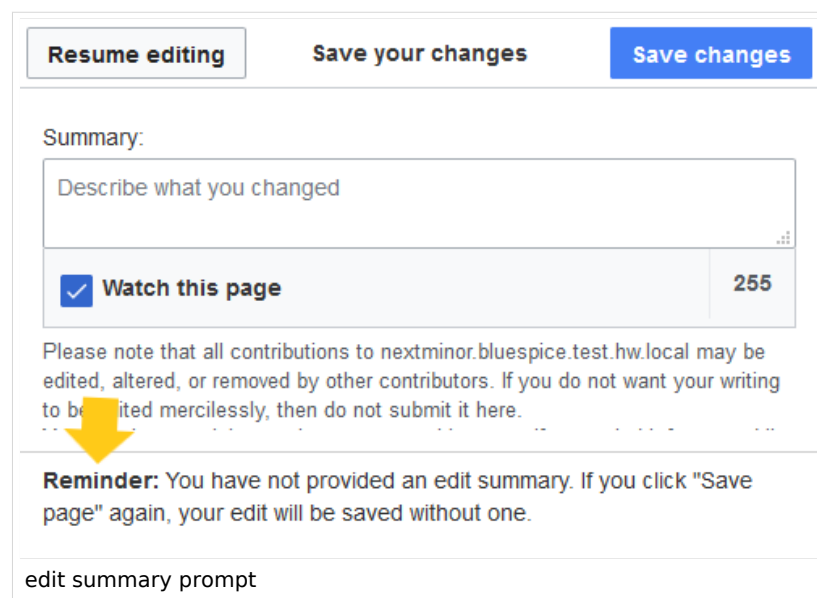

The screenshot shows the MediaWiki save dialog. At the top are three buttons: 'Resume editing', 'Save your changes', and 'Save changes'. Below these is a 'Summary:' section with a text input field containing the placeholder 'Describe what you changed'. Under the summary field is a checkbox labeled 'Watch this page' which is checked, and a counter '255'. Below this is a warning message: 'Please note that all contributions to nextminor.bluespice.test.hw.local may be edited, altered, or removed by other contributors. If you do not want your writing to be edited mercilessly, then do not submit it here.' A yellow arrow points down to a 'Reminder' message: 'Reminder: You have not provided an edit summary. If you click "Save page" again, your edit will be saved without one.' At the bottom of the dialog is the text 'edit summary prompt'.

- **Warn me when I leave an edit page with unsaved changes:** When you reload or leave a page with unsaved edits, a warning message is displayed. You can confirm to leave the page or stay on the page and save your changes.
- **Show edit toolbar:** Disables VisualEditor in visual editing mode. Disabling is not recommended, as this reverts the editor back to a previous version of MediaWiki editor.
- **Temporarily disable the visual editor while it is in beta:** You can disable visual editor while it is in [Extension:VisualEditor|beta mode](#). We recommend you do not disable VisualEditor unless you prefer to work with a previous visual editor version.


## Preview

These preview settings are only applied if you have temporarily disabled VisualEditor and the edit text area is on the same page as the page preview. In BlueSpice 3.1+ you can generally ignore these settings.

- **Show preview on first edit:** The preview of the article is displayed when you click on "Edit"
- **Show preview before edit box:** If this option is deactivated, the preview will be shown under the edit form
- **Show previews without loading the page:**

## Reminder

- **Default reminder period:** Prefills the date field for reminders with *current date + x days* specified here.

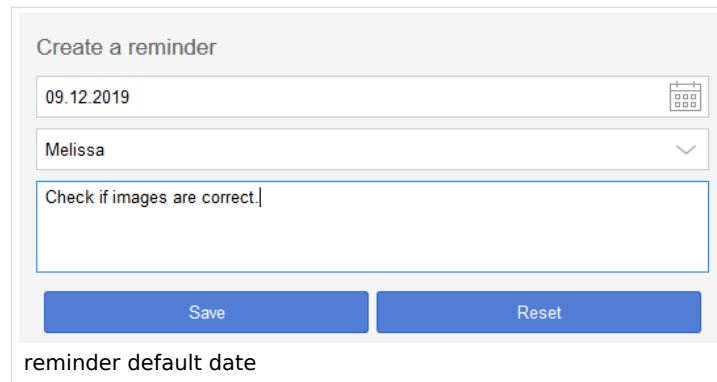

- **Set reminder on page creation:** When you create a new page, a reminder for that page is automatically created based on the default reminder period you entered.
- **Do not create reminder for the following namespaces:** Excludes namespaces from the automatic reminder on page creation.


## Timeline

- **Warn me when I leave an edit of an entry with unsaved changes:** If unchecked, any unsaved changes to a social entity (such as blog entry, comment, microblog or discussion topic) will be automatically lost if you navigate to a different page or reload the page before saving your changes.
- **Skip dialog on discussion creation:** Automatically creates a discussion page when a user adds a discussion directly on a page and the discussion page for the entry does not yet exist. If this checkbox is unchecked, the user has to create the discussion page first before the discussion topic can be posted.

## Recent changes

### Display options

- **Days to show in recent changes:** You can set how many results are displayed on the page *Recent changes*.
- **Number of edits to show in recent changes, (...) by default:** Setting for the filter (1) on the *Recent changes* page and similar log pages. The filter can be manually changed during page visits.

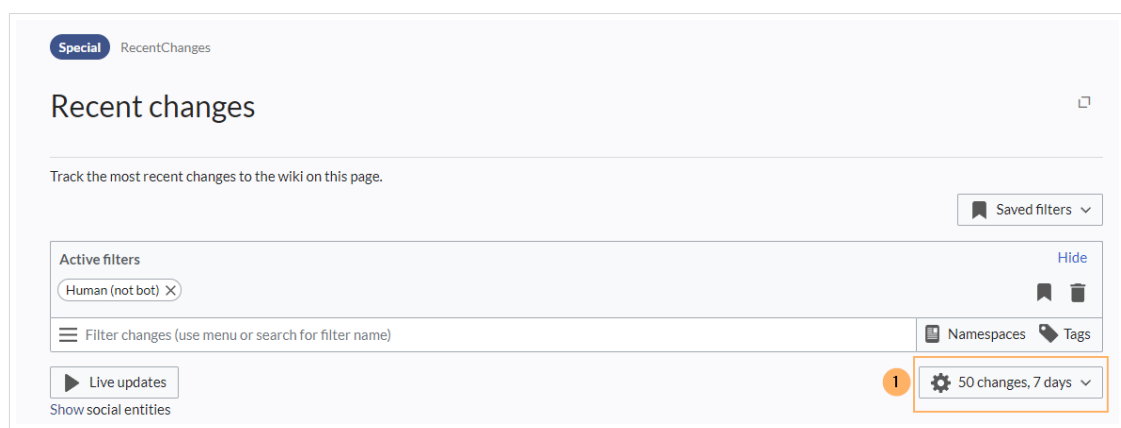

## Advanced options

- **Group changes by page in recent changes and watchlist:** This view creates a collapsible view of all the changes on a page that occurred before another page was edited. All changes still count towards the number of changes that are set in the view filter for the page.

### 22 March 2023

▼ 13:56 MLR:Test [pending edits] (2 changes | history) .. (+25) .. [WikiSysop (2×)]

13:56 (cur | prev) .. (+14) .. WikiSysop (talk | contribs | block) [rollback 2 edits]  
13:55 (cur | prev) .. (+11) .. WikiSysop (talk | contribs | block)

13:42 MediaWiki:Common.js (diff | hist) .. (+276) .. WikiSysop [rollback more than 10 edits]

▶ 13:23 MLR:Test1 [pending edits] (6 changes | history) .. (+104) .. [Maximilian Achterbahn (6×)]

Grouped changes

- **Use non-JavaScript interface:** Removes the advanced filter option to save filters and to color-highlight changes.

## Changes shown

- **Hide minor edits from recent changes:** Hide [edits marked as minor](#) from appearing on your *Recent changes* page by default.

## Edit review

These settings are provided by the extension [FlaggedRevs](#) (approval feature).



FlaggedRevs is available up to BlueSpice 4.2.

- **Basic interface:** This setting has no effect in the *BlueSpice Discovery* skin
- **When to show the stable version of content pages by default:**
  - Use the default settings for each page: This setting has no effect in BlueSpice (default settings cannot be [set by administrators on a page level](#))
  - **Always show the stable version (if there is one):** This default setting is only applied if the [FlaggedRevs](#) feature is active in a namespace. It shows the approved (stable) version by default when navigating to that page.
  - **Always show the latest version:** It is a useful settings for users with review permissions who can accept draft versions. It loads the latest revision of a page by default instead of the stable version.
- **Show the pending changes diff when viewing the latest pending version:** This setting has no effect in the *BlueSpice Discovery* skin.

## Watchlist

### Edit watchlist

- **Edit entries on your watchlist:**
  - *View and remove titles on your watchlist:* Links to the page Special:EditWatchlist where you can manage your watchlist entries. The watchlist is organized by namespaces.
  - *Edit raw watchlist:* Links to the page Special:EditWatchlist/raw where you can remove pages by page name from a textbox. This list is also organized by namespaces.
  - *Clear watchlist:* Links to the page Special:EditWatchlist/clear where you can empty your watchlist with the click of a button.

### Display options

- **Days to show in watchlist** (default:7): Presets the value in the selection menu Period of time to display on the page *Special:Watchlist*.
- **Maximum number of changes to show in watchlist** (default:250): Limits the number of changes that are displayed in your watchlist.

This example shows a default setting of 8 days and 20 changes.

Watchlist options

Below are the last **20** changes in the last **192** hours, as of 3 December 2019, 13:40.  
Period of time to display:

watchlist display options

### Advanced options

- **Expand watchlist to show all changes, not just the most recent** (default): Determines if a changed page is displayed several times in the filtered time period or if only the latest change is listed.
- **Add direct unwatch/watch markers (x/+) to watched pages with changes (JavaScript required for toggle functionality):** An icon for the direct removal of the page from the watchlist is available.

22 March 2023

○

×

13:23 MLR:Test1 pending edits (diff | hist) .. (+22) .. Maximilian Achterbahn (→Heading 1) [rollback 6 edits]

○

×

12:54 Test (diff | hist) .. (+5) .. Maximilian Achterbahn [rollback 1 edit]

1

2

17 March 2023

●

×

17:03 FB:Yet another page pending edits (diff | hist) .. (-43) .. WikiSysop [rollback 4 edits]

3

Direct markers: (1) Changes have been read, (2) remove from watchlist, (3) changes have not been read



- **Use non-JavaScript interface:** A basic view of the watchlist loads (without special filter menu and without highlighting options).
- **Add pages I review to my watchlist** (until BlueSpice 4.2): Automatically adds pages the user approves to the watchlist.

## Changes shown

These settings configure a standard filter for the watchlist. By default, no filter is applied. Possible standard filters are:

- **Hide minor edits from the watchlist**
- **Hide bot edits from the watchlist**
- **Hide my edits from the watchlist**
- **Hide edits by anonymous users from the watchlist**
- **Hide edits by logged in users from the watchlist**

The screenshot shows the 'Active filters' section of the watchlist. It contains two filter buttons: 'Changes by others' and 'Non-minor edits', both with an 'X' icon to remove them. A red circle with the number '1' highlights the 'Non-minor edits' button. Below the filters is a search bar labeled 'Filter changes (use menu or search for filter name)'. To the right of the search bar are links for 'Namespaces' and 'Tags'. Below the search bar is a 'Live updates' button. At the bottom left, there is a 'Hide' section with a checked checkbox for 'social entities' and a 'Show' button. At the bottom right, there is a settings icon, a text '250 changes, 7 days', and a dropdown arrow. A 'Hide' link is in the top right corner. Below the interface, the text 'Standard filter with preset values from the preferences settings' is displayed.

## Watched pages

These settings determine which pages are automatically added to the watchlist by preselecting the checkbox *Watch this page* of the related dialog window. If no dialog window is available, the addition to the watchlist automatically happens in the background:

- **Add pages and files I edit to my watchlist (default)**

The screenshot shows the 'Save your changes' dialog window. It has a title bar with a close button (X) and a 'Save changes' button. The main content area has a 'Summary:' label followed by a text input field with the placeholder text 'Describe what you changed'. Below the input field are two checkboxes: 'This is a minor edit' (unchecked) and 'Watch this page' (checked). The 'Watch this page' checkbox is highlighted with a red circle. At the bottom of the dialog is a 'Review your changes' button. Below the dialog, the text 'Pre-checked watchlist checkbox' is displayed.

- **Add pages and files I move to my watchlist**
- **Add pages and files I delete to my watchlist**
- **Add pages I create and files I upload to my watchlist** (default)
- **Add pages where I have performed a rollback to my watchlist**

- **Add new files I upload to my watchlist** (default)

## Token

- **Watchlist token:** The token can be used to create a public RSS feed to your watchlist. Anyone who knows this token can access the feed. The syntax for the feed URL is: `https://[YourWikiDomain]/w/api.php?action=feedwatchlist&wlower=[USERNAME]&wltoken=[TOKEN]` .


## Notifications

---

**Important!** Notification don't consider the edit type "Minor edit". Therefore, notifications are sent even in the case where a user makes a minor edit.

Here you can set how and when you would like to receive notifications in email and/or in the notifications area of your user profile (Web notifications). If you haven't received email notifications yet, make sure that your email adress has been verified. This information is available in the *User profile* tab, under the section *Email options*.

To view your Web notifications, go to your User profile menu and select Notifications.

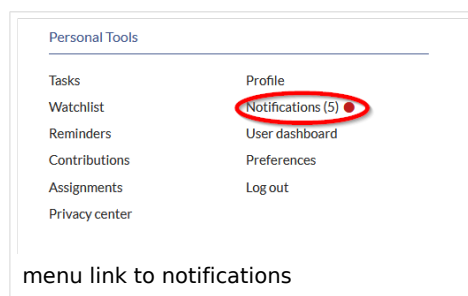


The user profile image in the main toolbar and the *Notifications* menu item show the number of new notifications. Notifications can set for a variety of events, such as new assignments or reminders. You can also select to be notified about changes only in certain namespaces or categories.

To configure which notifications you want to get, click on *Preferences* in the *Settings* menu (3).

## Email options

You can specify how often you receive emails: *never*, *immediately*, *daily*, or *weekly*.

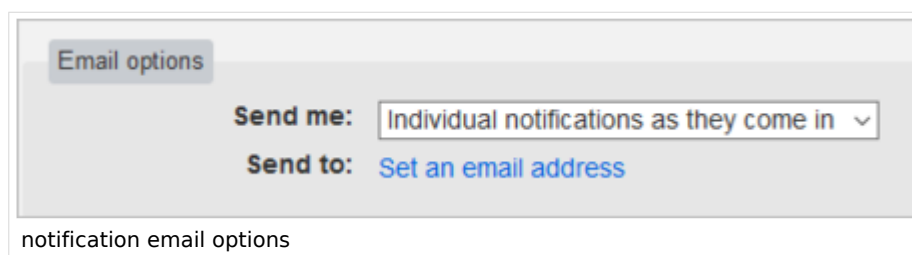

If you unexpectedly don't receive emails for notifications, check under the *User profile* tab to make sure that you have already confirmed your email account.

Email confirmation:	Your email address is not yet confirmed. No email will be sent for any of the following features. <a href="#">Confirm your email address</a>
unconfirmed email address	

## Notify me about these events

Notifications can be displayed in the Notifications page of the wiki. This functionality is provided by the MediaWiki extension *Echo*.

## New message indicator

This setting currently has no effect in BlueSpice. It is a configuration setting for the MediaWiki extension [Extension:Echo|Echo](#) (echo-show-alert).

## Notifications on namespace events

Select for which namespaces you want to receive notifications.

## Notifications on categories

Select for pages in which categories you want to receive notifications.

## Review

- **Notify me about changes if I am the owner of a review:** Select if you want to be notified in email of any workflow changes of a review workflow if you are the owner of the review.
- **Notify me about changes if I am the reviewer of a review:** Select if you want to be notified in email of any workflow changes of a review workflow if you are the owner of the review.

Under the settings for *Notify me about these events*, you can set if and how you want to be notified if someone assigns a review task to you.

## Extended Search

---

Here you can set which namespaces you want to include in your search results. This can be useful if you work in only some areas of the wiki or if you are looking for information in a few areas of your wiki only.

## Semantic MediaWiki

---

These user preferences are provided by Semantic MediaWiki. If you would like to change these settings, you can visit the corresponding [help page](#).

## Resetting all preferences

If you click *Restore all default settings (in all sections)*, all your customizations on all tabs are reset to their default settings. Since this could affect lots of customized settings, a warning page appears before the reset.

You can use this page to reset your preferences to the site defaults. This cannot be undone.

Restore all default settings (in all sections)

restoring default settings

Use the browser's back button if you do not want to restore the default settings.

## Reference:BlueSpiceExtendedSearch

## Extension: BlueSpiceExtendedSearch

→ [all extensions](#)

Overview			
Description:	Elasticsearch search backend		
State:	stable	Dependency:	BlueSpice
Developer:	HalloWelt	License:	<a href="#">GPL-3.0-only</a>
Type:	BlueSpice	Category:	Search and Navigation
Edition:	BlueSpice pro, BlueSpice free, BlueSpice Farm, BlueSpice Cloud	Version:	4.1+
<a href="#">? View user help page</a>			

## Features

---

**ExtendedSearch** replaces the default MediaWiki search engine. It is based on OpenSearch (up to BlueSpice 4.3: Elasticsearch), and provides many improvements over the standard MediaWiki search both in terms of quality of indexed content and user interface.

- Search titles.
- Search the full content.
- Search uploaded or linked files (Office documents and PDFs).
- Search image data.
- Search-as-you-type and auto-complete.
- Ignore upper and lower case (case-insensitive).
- Search with the operators AND, OR, NOT.
- Search with wildcards.
- Search for phrases.
- Fuzzy search.
- Search for sentence fragments.

Some aspects of this extension can be configured on [Special:BlueSpiceConfigManager](#), under section "ExtendedSearch". Here wiki administrators can configure:

- external file paths
- layout of the autocomplete box
- language filter
- exclude patterns

## Boosting (server configuration)

---

For boosting by match percent, the following settings are available in the extension itself:

```
"ESRecentBoostFactor": {
  "description": "Value must be between 0 and 1. If set to 1, very recent pages will
almost double their score",
  "public": false,
  "value": "0.5"
},
"ESMatchPercentBoostFactor": {
  "description": "How much to boost the result based on the percent of its title taken
up by the search term. Set to 0 to disable",
  "public": false,
  "value": "0.5"
},
"ESMatchPercentTitleField": {
  "description": "Field on which to base the match percent boosting. If empty, default
title field of the source will be used",
  "public": false,
  "value": ""
}
```

## System-wide boosting

By default, BlueSpice influences the score, after the results have been retrieved, in the following ways:

- **Creation date / last edit:** All things equal, more recently edited pages will rank higher. The amount of influence can be adjusted with '\$bsgESRecentBoostFactor' (default 0.5). The value for this can be a number between 0 and 1. 0 means that recency of the page does not change the score and 1 means that very recent changes might get their score doubled.
- **Percent of the page title taken up by the search term:** An additional score boost is assigned to results that match a larger part of the title. E.g., if the search term is "foo", a page called "Foo Bar" will have a good match percentage (50%), since the search term takes 50% of the full page name. The page "Foo quick brown fox jumps" will have a lower percentage boost, because the search term takes up only a small percentage of the whole title. This is controlled by '\$bsgESMatchPercentBoostFactor' (default 0.5). Same as for the previous setting, a value of 0 will effectively disable this kind of boosting, while 1 would double the score for exact matches (In our example, page "Foo Bar" would get 50% added to its original score).
- **Wikipages** will always be boosted a bit more than other results types (repofile, socialentity, ...)
- Inside the "wikipedia" type, pages in **content namespaces** and especially pages in **NS\_MAIN** will be boosted additionally. Talk pages will receive no boost.

Additional configuration is possible for:

- **ESMatchPercentTitleField:** Field on which the match analysis is performed. Defaults to nothing, so whatever the search lookup sets. It can be set to "prefixed\_text" to calculate match percent on the title with namespace prefix, for example, or to something like "basename" to calculate the match percent only on the page name, without the namespace prefix.

## User-related boosting

Users can adjust how pages are ranked individually. Such adjustments will only be applied for search queries made by that user and do not affect global search ranking.

- **Preferred namespace:** On the page *Special:Preferences* (tab "Extended search"), a user can prioritize namespaces, so that pages in those namespaces will be ranked a bit higher.
- **Favourite results:** In the list of search results, each result has a little "star"-button in the top right corner. Clicking this marks a result as "favorite" for the user who clicked it. This means that this particular result will be boosted more than other results.

## Technical Information

---

This information applies to BlueSpice 4. Technical details for BlueSpice Cloud can differ in some cases.

### Requirements

MediaWiki: 1.37.0

BlueSpiceFoundation: 4.1

## Integrates into

- BlueSpiceArticleInfo
- BlueSpiceExtendedSearch
- BlueSpiceExtendedStatistics
- BlueSpicePrivacy
- BlueSpiceSimpleFarmer
- BlueSpiceTagCloud
- BlueSpiceVisualEditorConnector
- ContentDroplets
- VisualEditor

## Special pages

- BSSearchAdmin
- BSSearchCenter

## Permissions

Name	Description	Role
extendedsearch-search-externalfile	Search for external files	accountmanager, admin, author, bot, commenter, editor, maintenanceadmin, reader, reviewer, structuremanager
extendedsearch-search-repofile	Search for files	accountmanager, admin, author, bot, commenter, editor, maintenanceadmin, reader, reviewer, structuremanager
extendedsearch-search-specialpage	Search for special pages	accountmanager, admin, author, bot, commenter, editor, maintenanceadmin, reader, reviewer, structuremanager
extendedsearch-search-wikiplane	Search for pages	accountmanager, admin, author, bot, commenter, editor, maintenanceadmin, reader, reviewer, structuremanager

## Configuration

Name	Value
ESAllowIndexingDocumentsWithoutContent	true
ESAutoRecognizeSubpages	true
ESAutoSetLangFilter	false
ESBackendClass	'\\BS\\ExtendedSearch\\Backend'

Name	Value
ESBackendHost	'127.0.0.1'
ESBackendPassword	"
ESBackendPort	'9200'
ESBackendTransport	'https'
ESBackendUsername	"
ESCompactAutocomplete	true
ESDefaultSearchOperator	'AND'
ESEnableSearchHistoryTracking	true
ESEnableTypeFilter	true
ESExternalFilePaths	array ( )
ESIndexPrefix	"
	array ( 0 => '[0-9]{2}\\-[0-9]{2}\\-[0-9]{4}', 1 => '[0-9]{4}\\-[0-9]{2}\\-[0-9]{2}', 2 => '[0-9]{2}\\-[0-9]{4}\\-[0-9]{2}', 3 => '[0-9]{2}\\V[0-9]{2}\\V[0-9]{4}', 4 => '[0-9]{4}\\V[0-9]{2}\\V[0-9]{2}', 5 => '[0-9]{2}\\V[0-9]{4}\\V[0-9]{2}', 6 => '[0-9]{2}\\.[0-9]{2}\\.[0-9]{4}', 7 => '[0-9]{4}\\.[0-9]{2}\\.[0-9]{2}', 8 => '[0-9]{2}\\.[0-9]{4}\\.[0-9]{2}', 9 => '[0-9]{2}\\V\\[0-9]{2}\\V\\[0-9]{4}', 10 => '[0-9]{4}\\V\\[0-9]{2}\\V\\[0-9]{2}', 11 => '[0-9]{2}\\V\\[0-9]{4}', 12 => '[0-9]{1}\\-[0-9]{2}\\-[0-9]{4}', 13 => '[0-9]{4}\\-[0-9]{2}\\-[0-9]{1}', 14 => '[0-9]{1}\\-[0-9]{4}\\-[0-9]{2}', 15 => '[0-9]{4}\\-[0-9]{1}\\-[0-9]{2}', 16 => '[0-9]{2}\\-[0-9]{4}\\-[0-9]{1}', 17 => '[0-9]{2}\\-[0-9]{1}\\-[0-9]{4}', 18 => '[0-9]{1}\\V[0-9]{2}\\V[0-9]{4}', 19 => '[0-9]{4}\\V[0-9]{2}\\V[0-9]{1}', 20 => '[0-9]{1}\\V[0-9]{4}\\V[0-9]{2}', 21 => '[0-9]{4}\\V[0-9]{1}\\V[0-9]{2}', 22 => '[0-9]{2}\\V[0-9]{4}\\V[0-9]{1}', 23 => '[0-9]{2}\\V[0-9]{1}\\V[0-9]{4}', 24 => '[0-9]{1}\\.[0-9]{2}\\.[0-9]{4}', 25 => '[0-9]{4}\\.[0-9]{2}\\.[0-9]{1}', 26 => '[0-9]{1}\\.[0-9]{4}\\.[0-9]{2}', 27 => '[0-9]{4}\\.[0-9]{1}\\.[0-9]{2}', 28 => '[0-9]{2}\\.[0-9]{4}\\.[0-9]{1}', 29 => '[0-9]{2}\\.[0-9]{1}\\.[0-9]{4}', 30 => '[0-9]{1}\\V\\[0-9]{2}\\V\\[0-9]{4}', 31 => '[0-9]{4}\\V\\[0-9]{2}\\V\\[0-9]{1}', 32 => '[0-9]{1}\\V\\[0-9]{4}\\V\\[0-9]{2}', 33 => '[0-9]{4}\\V\\[0-9]{1}\\V\\[0-9]{2}', 34 => '[0-9]{2}\\V\\[0-9]{4}\\V\\[0-9]{1}', 35 => '[0-9]{2}\\V\\[0-9]{1}\\V\\[0-9]{4}'



Name	Value
ESLookupModifierRegExPatterns	{4}', 36 => '[0-9]{2}\\-[0-9]{2}\\-[0-9]{2}', 37 => '[0-9]{2}\\V[0-9]{2}\\V[0-9]{2}', 38 => '[0-9]{2}\\.[0-9]{2}\\.[0-9]{2}', 39 => '[0-9]{2}\\\\[0-9]{2}\\\\[0-9]{2}', 40 => '[0-9]{1}\\-[0-9]{1}\\-[0-9]{4}', 41 => '[0-9]{4}\\-[0-9]{1}\\-[0-9]{1}', 42 => '[0-9]{1}\\-[0-9]{4}\\-[0-9]{1}', 43 => '[0-9]{1}\\V[0-9]{1}\\V[0-9]{4}', 44 => '[0-9]{4}\\V[0-9]{1}\\V[0-9]{1}', 45 => '[0-9]{1}\\V[0-9]{4}\\V[0-9]{1}', 46 => '[0-9]{1}\\.[0-9]{1}\\.[0-9]{4}', 47 => '[0-9]{4}\\.[0-9]{1}\\.[0-9]{1}', 48 => '[0-9]{1}\\.[0-9]{4}\\.[0-9]{1}', 49 => '[0-9]{1}\\\\[0-9]{1}\\\\[0-9]{4}', 50 => '[0-9]{4}\\\\[0-9]{1}\\\\[0-9]{1}', 51 => '[0-9]{1}\\\\[0-9]{4}\\\\[0-9]{1}', 52 => '[0-9]{1}\\-[0-9]{1}\\-[0-9]{2}', 53 => '[0-9]{2}\\-[0-9]{1}\\-[0-9]{1}', 54 => '[0-9]{1}\\-[0-9]{2}\\-[0-9]{1}', 55 => '[0-9]{1}\\V[0-9]{1}\\V[0-9]{2}', 56 => '[0-9]{2}\\V[0-9]{1}\\V[0-9]{1}', 57 => '[0-9]{1}\\V[0-9]{2}\\V[0-9]{1}', 58 => '[0-9]{1}\\.[0-9]{1}\\.[0-9]{2}', 59 => '[0-9]{2}\\.[0-9]{1}\\.[0-9]{1}', 60 => '[0-9]{1}\\.[0-9]{2}\\.[0-9]{1}', 61 => '[0-9]{1}\\\\[0-9]{1}\\\\[0-9]{2}', 62 => '[0-9]{2}\\\\[0-9]{1}\\\\[0-9]{1}', 63 => '[0-9]{1}\\\\[0-9]{2}\\\\[0-9]{1}', 64 => '[0-9]{2}\\-[0-9]{4}', 65 => '[0-9]{2}\\V[0-9]{4}', 66 => '[0-9]{2}\\.[0-9]{4}', 67 => '[0-9]{2}\\\\[0-9]{4}', 68 => '[0-9]{4}\\-[0-9]{2}', 69 => '[0-9]{4}\\V[0-9]{2}', 70 => '[0-9]{4}\\.[0-9]{2}', 71 => '[0-9]{4}\\\\[0-9]{2}', 72 => '[0-9]{2}\\-[0-9]{2}', 73 => '[0-9]{2}\\V[0-9]{2}', 74 => '[0-9]{2}\\.[0-9]{2}', 75 => '[0-9]{2}\\\\[0-9]{2}', )
ESMatchPercentBoostFactor	'0.5'
ESMatchPercentTitleField	"
ESOfferOperatorSuggestion	true
ESRecentBoostFactor	'0.5'
ESSearchCenterDefaultFilters	array ( 0 => 'namespace_text', 1 => 'categories', )
ESSearchInRawWikitext	true
ESSharedUploadsIndexPrefix	false
ESSourceConfig	array ( 'wikipage' => array ( 'skip_namespaces' => array ( 0 => 8, 1 => 9, ), ), 'repofile' => array ( 'extension_blacklist' => array ( 0 => 'mp4', ), 'max_size' => 20000000, ), 'externalfile' => array ( 'extension_blacklist' => array ( 0 => 'mp4', ), 'max_size' => 20000000, ), )

Name	Value
ESSubpageMasterFilterPatterns	array ( )
ESSubpageMasterFilterUseRootOnly	true
ESUseSharedUploads	false
ESWildcardingOperators	array ( 0 => '+', 1 => ' ', 2 => '*', 3 => '(', 4 => ')', 5 => '~', )
ESWildcardingSeparators	array ( 0 => ',', 1 => '.', 2 => ';', 3 => '-', 4 => '_', )
ExtendedSearchExternalFilePathsExcludes	array ( )
TagSearchSearchFieldTemplatePath	'/resources/templates'

API Modules

- bs-extendedsearch-autocomplete
- bs-extendedsearch-query
- bs-extendedsearch-resultrelevance
- bs-extendedsearch-stats
- bs-extendedsearch-triggerupdate
- bs-extendedsearch-type-store

Hooks

- BSUEModulePDFBeforeCreatePDF
- BeforePageDisplay
- ChameleonSkinTemplateOutputPageBeforeExec
- GetPreferences
- LoadExtensionSchemaUpdates
- MWStakeCommonUIRegisterSkinSlotComponents
- MWStakeRunJobsTriggerRegisterHandlers
- NamespaceManager::editNamespace
- UserMergeAccountFields

Accessibility

Test status:	2-testing complete
Checked for:	Web
Last test date:	2022-08-08
WCAG level:	AA

<b>WCAG support:</b>	partially supports (workaround: )
<b>Comments:</b>	<ul style="list-style-type: none"> <li>• filter pills, buttons: don't indicate focus, so they cannot easily be opened with keyboard although technically it would already work.</li> <li>• all buttons announce “blank” and cannot be distinguished.</li> </ul> <p>erm:<a href="#">29483</a></p>
<b>Extension type:</b>	core
<b>Extension focus:</b>	reader