

## Generate page lists (smart lists)

The extension **SmartList** allows to insert a list of pages in a wiki page using the tags *smartlist*, *newbies*, or *toplist*. The selection criteria can be set using a dialog box.

### Contents

1 Available tags .....	2
2 Smartlist .....	2
2.1 Parameters .....	3
2.2 Wikitext editing .....	4
3 Newbies .....	4
3.1 Parameters .....	5
3.2 Example in wikicode .....	5
4 Toplist .....	5
4.1 Parameters .....	5
4.2 Example in wikicode .....	5

## Available tags

The extension SmartList includes three different tags:


- `<bs:smartlist />` / `<recentchanges />` - display a list of pages that were edited in the last 90 days. It can be filtered by namespaces or categories.
  - Different modes are possible if the `<bs:smartlist />` tag is added in source edit mode.
- `<bs:newbies />` - display a list of recently registered users.
- `<bs:toplist />` - display a list of most visited pages.

The tags can be added as content droplets. v4.3+ . Earlier BlueSpice versions contained the menu item *Insert > Magic word* in [VisualEditor](#). -v4.3

## Smartlist

The `<bs:smartlist />` tag shows a list of recently changed pages (<90 days) by default.

The list can be inserted in source edit mode or as the [content droplet](#) "Recent changes", in which case it is inserted as `<recentchanges />` tag in the page source. v4.3+

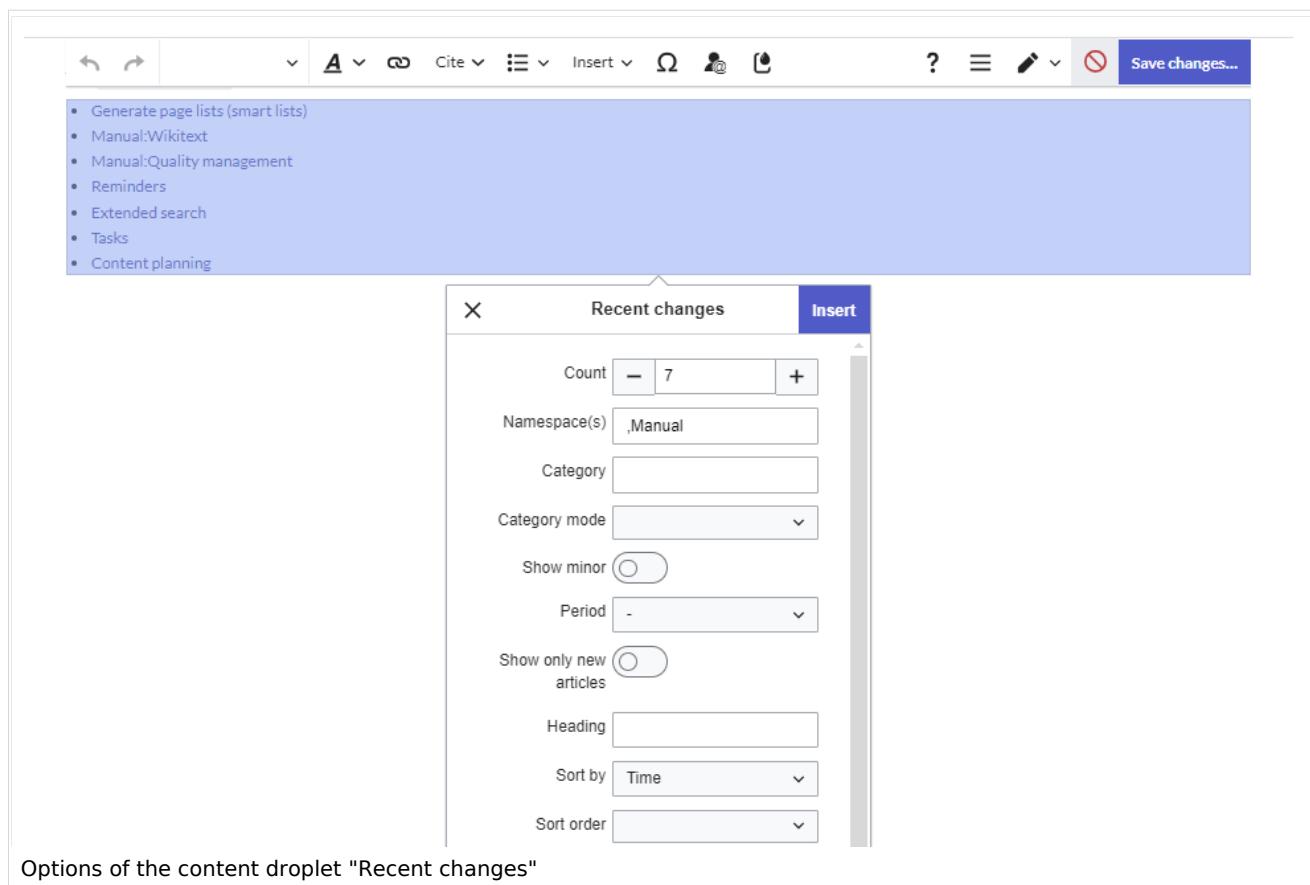

In source edit mode, the *smartlist* tag (not the *recentchanges* tag!) additionally accepts the parameter *mode* with the following values:

- mode=stablepages
- mode=whatlinkshere

## Parameters

The SmartList inspector allows to set the following parameters:

Label	Parameter	Values	Description
Count	<b>count</b>	number	The number of articles to be shown. Default value: 5
Namespace(s)	<b>ns</b>	number or name	Only articles from given namespace will be listed. The namespaces can be entered by IDs or by names. Several namespaces can be separated with commas: ns="0,2,5" or ns="Help,User,Test". Default: All namespaces are included.  <b>Note:</b> Only content namespaces are included in the list.
Category	<b>cat</b>	name	Only articles from given category will be listed. Selecting several categories is not possible. Default: All categories.
Category mode	<b>catmode</b>	AND, OR	Show pages if they are in at least one of the categories (OR) or show pages if they are tagged with all categories (AND).
Show minor	<b>minor</b>	true, false	Minor changes (changes marked with an "m" in the recent changes) will not be listed. Default: Minor changes are listed.
Period	<b>period</b>	-, month, week, day	Only changes within given period are shown. Default: No limit is set (full 90 days are shown).
Show only new articles	<b>new</b>	true, false	Only new pages will be listed. Default: All pages are shown
Heading	<b>heading</b>	text	Adds a heading above the list
Sort by	<b>sort</b>	Title, Time	Sort results by title or by latest edited.
Sort order	<b>order</b>	asc, desc	Ascending or descending sort order.
Trim	<b>trim</b>	number	Long article names are not cropped. Default: The title is cut off after 30 characters.
	<b>showtext</b>	true,	

Show text		false	With this option, a line of the article contents will be shown alongside the title.
Trim text	<b>trimtext</b>	number	"trimtext" sets the number of characters of an article's content shown. This is only relevant when <i>showtext="true"</i> ). <i>Note:</i> trimtext="0" is <u>not</u> possible.
Show namespaces	<b>showns</b>	true, false	If true, the namespace prefix is shown with the page names.
Number with text	<b>numwithtext</b>	number	Anzahl der Artikel die mit Einführungstext angezeigt werden sollen. Nur effektiv wenn <i>showtext=true</i>
Meta	<b>meta</b>	true	The username and date for the last edit are shown.
Target	<b>target</b>	-	Obsolete
Exclude namespace(s)	<b>excludens</b>	number or name	Articles from given namespaces will not be shown. The namespaces can be entered by IDs or by names (comma-separated). Default: All namespaces are included.

## Wikitext editing

Here you see a syntax example with some parameters. These can only be added in source edit mode.

15 of the pages from the category */ISO9001* that were changed in the last 90 days are displayed in alphabetical order.

```
<bs:smartlist sort="title" cat="ISO9001" count="15" heading="Pages about ISO 9001" />
```

If the approval feature is activated, the list can be set to include the latest [approved pages](#) (instead of edited pages):

```
<bs:smartlist period="week" sort="time" showns="0" mode="stablepages" count="8" />
```

Alternatively, the smartlist can also display a list of pages that link to a wiki page. The corresponding page name is specified as **target**:

```
<bs:smartlist mode="whatlinkshere" target="Main Page" />
```

## Newbies

The tag **<bs:newbies />** shows recently registered wiki users.

The list can be inserted as the [content droplet](#) "New users". v4.3+

## Parameters

Label	Parameter	Values	Description
Count - <b>count</b>			The number of users to be shown; the default value is 10.

## Example in wikicode

```
<bs:newbies count="7"/>
```

## Toplist

This tag shows a list of the most visited pages.

The list can be inserted as the [content droplet "Most visited pages"](#). v4.3+

## Parameters

Label	Paramter	Values	Description
Count	<b>count</b>	number	The number of articles to be shown; the default value is 10.
Namespaces	<b>ns</b>	text, text	Only articles from these namespace will be shown. You can put several namespaces here, separated by commas.
Category	<b>cat</b>	text, text	Only articles from this category will be shown. You can put several categories here, separated by commas.
Period	<b>period</b>	month, alltime	The period that should be used. The default is alltime.

## Example in wikicode

```
<bs:toplist count="7" ns="Help|QM" />
```



[Technical Reference: BlueSpiceSmartList](#)