

Blog

[Browse history interactively](#)
[VisualWikitext](#)

Revision as of 19:19, 18 March 2022 ([view source](#))

[Margit Link-Rodrigue](#) ([talk](#) | [contribs](#))

No edit summary

[← Older edit](#)

Revision as of 15:48, 5 April 2022 ([view source](#))

[Margit Link-Rodrigue](#) ([talk](#) | [contribs](#))

No edit summary

[Tag: Visual edit](#)

[Newer edit →](#)

Line 71:

{ class="wikitable"
 +
!Element
!Parameters
!Parameter and element description
!Type
!Default value
 -
 rowspan="2" 1 - header
 headlinemessagekey
 Header text
 string
 "Timeline"
 -
 showheadline
 Show the header text
 boolean
 "true"
 -
 rowspan="2" 2 - blog menu
 showentitylistmenu
 Show or hide the blog menu
 boolean
 "true"
 -
 showentityspawner
 Show the menu item for creating a blog entry
 boolean
 "true"

Line 71:

{ class="wikitable"
 +
! style="width:90px;" Element
! style="width:150px;" Parameters
!Parameter and element description
! style="width:80px;" Type
! style="width:80px;" Default value
 -
 rowspan="2" style="width:90px;" 1 - header
 style="width:150px;" headlinemessagekey
 Header text
 style="width:80px;" string
 style="width:80px;" "Timeline"
 -
 style="width:150px;" showheadline
 Show the header text
 style="width:80px;" boolean
 style="width:80px;" "true"
 -
 rowspan="2" style="width:90px;" 2 - blog menu
 style="width:150px;" showentitylistmenu
 Show or hide the blog menu
 style="width:80px;" boolean
 style="width:80px;" "true"
 -
 style="width:150px;" showentityspawner
 Show the menu item for creating a blog entry
 style="width:80px;" boolean
 style="width:80px;" "true"

-
availablesorterfields
Determines which data fields are included as sorting options in the sort menu. Example: allow sorting only by date created or by the user who created a blog entry:
<code>"availablesorterfields":["timestampcreated","ownerid"]</code>
[[File:Manual:blog-filter-timestampcreated.png 350x350px Special:FilePath/Manual:blog-filter-timestampcreated.png]]
[[Manual:Extension/BlueSpiceSocialBlog#Sor List of typical sort fields]]
array
all
-
lockedoptionnames
Determines which settings for sorting the user cannot change.
array
[]
-
availablefilterfields
Determines which data fields are included as filter options in the filter menu. Example: allow filtering based on Creation date and Linked pages:
<code>"availablefilterfields":["timestampcreated","tags"]</code>
[[File:Manual:blog-filter-availablefilterfields.PNG 350x350px]]
array
all
-
lockedfilternames
Determines which settings for filtering the user cannot change.
Example: a user cannot change the filter values for "Linked pages." The text field is greyed out:

Line 128:

<code>"lockedfilternames":["tags"]</code>
[[File:Manual:blog-filter-lockedfilternames.png 350x350px Special:FilePath/Manual:blog-filter-lockedfilternames.png]]
array

-
style="width:150px;" availablesorterfields
Determines which data fields are included as sorting options in the sort menu. Example: allow sorting only by date created or by the user who created a blog entry:
<code>"availablesorterfields":["timestampcreated","ownerid"]</code>
[[File:Manual:blog-filter-timestampcreated.png 350x350px]]
[[Manual:Extension/BlueSpiceSocialBlog#Sor List of typical sort fields]]
style="width:80px;" array
style="width:80px;" all
-
style="width:150px;" lockedoptionnames
Determines which settings for sorting the user cannot change.
style="width:80px;" array
style="width:80px;" []
-
style="width:150px;" availablefilterfields
Determines which data fields are included as filter options in the filter menu. Example: allow filtering based on Creation date and Linked pages:
<code>"availablefilterfields":["timestampcreated","tags"]</code>
[[File:Manual:blog-filter-availablefilterfields.PNG 350x350px]]
style="width:80px;" array
style="width:80px;" all
-
style="width:150px;" lockedfilternames
Determines which settings for filtering the user cannot change.
Example: a user cannot change the filter values for "Linked pages." The text field is greyed out:

Line 128:

<code>"lockedfilternames":["tags"]</code>
[[File:Manual:blog-filter-lockedfilternames.png 350x350pxg alt= 350x350px]]
style="width:80px;" array

[]
-
persistsettings
Initial settings and custom sort and filter settings are included in the page url. The url can then be used to create a link to the page with the same filter and sort settings.
<code>"persistsettings":true</code>
[[File:Manual:blog-filter-persistsettings.png link=Special:FilePath/Manual:blog-filter-persistsettings.png]]
boolean
"false"
-
3 - new blog entry
preloadentities
Shows the text field for creating a new blog entry. If it is not set, the text field is not available.
To show the text field:
<code>"preloadentities": [{"type":"blog"}]</code>
array of objects
-
-
rowspan="2" 4 - existing blog entry
outputtypes
It defines the display format of the blog entry.
Standard types are: "List, Short, Default, Page." ([[Manual:Extension/BlueSpiceSocialBlog#Output type examples see examples]])
Each blog entry is a "social entity".
object
"Default"
-
limit
Defines how many social entities are loaded initially.
object
"Default"
-
4a - avatar

style="width:80px;" []
-
style="width:150px;" persistsettings
Initial settings and custom sort and filter settings are included in the page url. The url can then be used to create a link to the page with the same filter and sort settings.
<code>"persistsettings":true</code>
[[File:Manual:blog-filter-persistsettings.png alt= 300x300px]]
style="width:80px;" boolean
style="width:80px;" "false"
-
style="width:90px;" 3 - new blog entry
style="width:150px;" preloadentities
Shows the text field for creating a new blog entry. If it is not set, the text field is not available.
To show the text field:
<code>"preloadentities": [{"type":"blog"}]</code>
style="width:80px;" array of objects
style="width:80px;" -
-
rowspan="2" style="width:90px;" 4 - existing blog entry
style="width:150px;" outputtypes
It defines the display format of the blog entry.
Standard types are: "List, Short, Default, Page." ([[Manual:Extension/BlueSpiceSocialBlog#Output type examples see examples]])
Each blog entry is a "social entity".
style="width:80px;" object
style="width:80px;" "Default"
-
style="width:150px;" limit
Defines how many social entities are loaded initially.
style="width:80px;" object
style="width:80px;" "Default"
-
style="width:90px;" 4a - avatar

<nowiki>--</nowiki>
Shows the avatar of the user who created the blog entry or comment. It is displayed in all output types except "List."
<nowiki>--</nowiki>
<nowiki>--</nowiki>
-
4b - info area
<nowiki>--</nowiki>
Link to the comments and "last edit" info.
<nowiki>--</nowiki>
<nowiki>--</nowiki>
-
4c - blog entry content
<nowiki>--</nowiki>
Shows the text body of a blog entry. The output type "Default" collapses the blog entry content after the first paragraph with a "More" link.
<nowiki>--</nowiki>
<nowiki>--</nowiki>
-
4d - action menu
<nowiki>--</nowiki>
Actions: "edit, delete, recommend, Linked page, watch"
[[File:Manual:blog-editmenu.png 200x200px link=Special:FilePath/Manual:blog-editmenu.png]]
<nowiki>--</nowiki>
<nowiki>--</nowiki>
-
5 - new comment
<nowiki>--</nowiki>
Text field for creating a new comment.
<nowiki>--</nowiki>
<nowiki>--</nowiki>
-
6 - existing comment
<nowiki>--</nowiki>
Comments include the social tag "Recommend."
Each comment is a "social entity".

style="width:150px;" <nowiki>--</nowiki>
Shows the avatar of the user who created the blog entry or comment. It is displayed in all output types except "List."
style="width:80px;" <nowiki>--</nowiki>
style="width:80px;" <nowiki>--</nowiki>
-
style="width:90px;" 4b - info area
style="width:150px;" <nowiki>--</nowiki>
Link to the comments and "last edit" info.
style="width:80px;" <nowiki>--</nowiki>
style="width:80px;" <nowiki>--</nowiki>
-
style="width:90px;" 4c - blog entry content
style="width:150px;" <nowiki>--</nowiki>
Shows the text body of a blog entry. The output type "Default" collapses the blog entry content after the first paragraph with a "More" link.
style="width:80px;" <nowiki>--</nowiki>
style="width:80px;" <nowiki>--</nowiki>
-
style="width:90px;" 4d - action menu
style="width:150px;" <nowiki>--</nowiki>
Actions: "edit, delete, recommend, Linked page, watch"
[[File:Manual:blog-editmenu.png 200x200px]]
style="width:80px;" <nowiki>--</nowiki>
style="width:80px;" <nowiki>--</nowiki>
-
style="width:90px;" 5 - new comment
style="width:150px;" <nowiki>--</nowiki>
Text field for creating a new comment.
style="width:80px;" <nowiki>--</nowiki>
style="width:80px;" <nowiki>--</nowiki>
-
style="width:90px;" 6 - existing comment
style="width:150px;" <nowiki>--</nowiki>
Comments include the social tag "Recommend."
Each comment is a "social entity".

```
|<nowiki>-</nowiki>
```

```
|<nowiki>-</nowiki>
```

```
|-
```

```
| rowspan="3" |7 - "more" button
```

```
|morelink
```

```
|Link target of the "more" button. For blogs, it makes sense to link to the page "Special:Blog".
```

```
|str
```

```
|"Special:Timeline"
```

```
|-
```

```
| useendlessscroll
```

```
|More blog entries are automatically loaded after the user scrolls to the end of the blog.
```

```
|boolean
```

```
|"true"
```

```
|-
```

```
|showentylistmore
```

```
|Shows a "more" button below the blog which loads more blog entries on click. This is only possible if "useendlesscroll" is set to "false".
```

```
|boolean
```

```
|"false"
```

```
|}
```

Line 255:

```
|-
```

```
|ownerid
```

```
|username of the creator of a blog entry
```

```
|-
```

```
|ownerrealname
```

Line 265:

```
{| class="wikitable"
```

```
|+
```

```
! Property
```

```
!Description
```

```
|-
```

```
| DESC
```

```
|sorts the blog entries in descending order
```

```
|-
```

Line 275:

```
| style="width:80px;" |<nowiki>-</nowiki>
```

```
| style="width:80px;" |<nowiki>-</nowiki>
```

```
|-
```

```
| rowspan="3" style="width:90px;" |7 - "more" button
```

```
| style="width:150px;" |morelink
```

```
|Link target of the "more" button. For blogs, it makes sense to link to the page "Special:Blog".
```

```
| style="width:80px;" |str
```

```
| style="width:80px;" |"Special:Timeline"
```

```
|-
```

```
| style="width:150px;" |useendlesscroll
```

```
|More blog entries are automatically loaded after the user scrolls to the end of the blog.
```

```
| style="width:80px;" |boolean
```

```
| style="width:80px;" |"true"
```

```
|-
```

```
| style="width:150px;" |showentylistmore
```

```
| Shows a "more" button below the blog which loads more blog entries on click. This is only possible if "useendlesscroll" is set to "false".
```

```
| style="width:80px;" |boolean
```

```
| style="width:80px;" |"false"
```

```
|}
```

Line 255:

```
|-
```

```
|ownerid
```

```
| username of the creator of a blog entry
```

```
|-
```

```
|ownerrealname
```

Line 265:

```
{| class="wikitable"
```

```
|+
```

```
!Property
```

```
! Description
```

```
|-
```

```
|DESC
```

```
|sorts the blog entries in descending order
```

```
|-
```

Line 275:

}}

===Filtering===

Without setting the filter parameter, there will be no output on the page.

Line 302:

</syntaxhighlight>

===Default ===

The output type "Default" shows the content of a blog entry truncated after the first paragraph. To view the full text, users can click on the "More" link.

[[File:Manual:blog-output-default.png|center|650x650px|link=Special:FilePath/Manual:blog-output-default.png|alt="Default" output|thumb|"Default" output]]

Line 310:

The output type "Short" does not show the content of the blog entry. To view the content, a user has to click on the title of a blog entry. This loads the actual page for the selected blog entity.

[[File:Manual:blog-output-short.png|center|650x650px|link=Special:FilePath/Manual:blog-output-short.png|alt="Short" output|thumb|"Short" output]]

===Page===

The output type "Page" shows all blog elements, including the comments, in an expanded view.

[[File:Manual:blog-output-page.png|center|650x650px|link=Special:FilePath/Manual:blog-output-page.png|alt="Page" output|thumb|"Page" output]]

===List===

The output type "List" only shows the title and the timestamp.

[[File:Manual:blog-output-list.png|center|link=Special:FilePath/Manual:blog-output-list.png|alt="List" output|thumb|450x450px|"List" output]]

== Configuration ==

}}

===Filtering ===

Without setting the filter parameter, there will be no output on the page.

Line 302:

</syntaxhighlight>

===Default===

The output type "Default" shows the content of a blog entry truncated after the first paragraph. To view the full text, users can click on the "More" link.

[[File:Manual:blog-output-default.png|center|650x650px|alt="Default" output|thumb|"Default" output]]

Line 310:

The output type "Short" does not show the content of the blog entry. To view the content, a user has to click on the title of a blog entry. This loads the actual page for the selected blog entity.

[[File:Manual:blog-output-short.png|center|650x650px|alt="Short" output|thumb|"Short" output]]

===Page ===

The output type "Page" shows all blog elements, including the comments, in an expanded view.

[[File:Manual:blog-output-page.png|center|650x650px|alt="Page" output|thumb|"Page" output]]

===List===

The output type "List" only shows the title and the timestamp.

[[File:Manual:blog-output-list.png|center|alt="List" output|thumb|450x450px|"List" output]]

==Configuration==

Revision as of 15:48, 5 April 2022


Contents

1	About the blog	9
2	Characteristics and features	9
3	Adding the blog to a page	9
4	Blog parameters	10
5	Output type examples	15
6	Configuration	17
7	Related info	18

The extension *BlueSpiceSocialBlog* is part of *BlueSpiceSocial*, the communications module of BlueSpice. In addition to the type blog, there are other types of so-called social entities, such as *comment*, *discussion topic*, *attachment*, or *microblog*.

About the blog

Basically, a blog is a list of comments, questions, or feedback from different users. The blog is often sorted chronologically. Lively communication can arise when blog entries are further commented, recommended, linked with related articles, or placed on a personal watchlist. The blog is ready to use on the special page *Special:Blog*. This page is linked directly from the main navigation in every new wiki installation. So you can start using the blog right away.

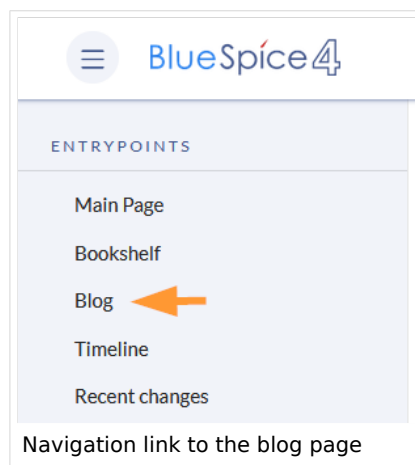

Characteristics and features

- A blog entry consists of a title and content.
- **Comments:** Users can leave comments to each blog entry.
- **Actions:**
 - **Delete:** Editors can delete their own posts. Administrators can delete all posts. Deleted posts are no longer displayed. Exception: Administrators see deleted items with a red background and can restore them.
 - **Recommend:** Blog posts can be recommended. It is possible to generate a list of posts with the most recommendations via the timeline filter. (See: Embedding the blog on a page)
 - **Linked page:** Every blog entry is connected to a wiki page by the system. By default, this is the main page of the wiki. However, other pages can be added as "Linked page". Blog entries can then be filtered for linked pages via the *Special:Timeline* page.
 - **Watch:** Own blog posts and comments are automatically added to the watch list.
- **Permissions:** It is possible to allow users with read permissions on the wiki to comment on blog entries. See: [BlueSpiceSocial Permissions](#).

Adding the blog to a page

It is also possible to include the blog functionality on any wiki page. Social contributions of many types can be consolidated and displayed chronologically in a timeline and filtered and sorted as needed.

If you want to include a view of your blog on another page of your wiki, for example your homepage, you need to insert the necessary codeblock in the source code of your page.

To include a blog view:

1. **Go to** the page where you want to insert the blog or create a new page.
2. **Open the page** in *Source editing* mode.
3. **Copy the following code block** to the section in your page where you want to show the blog.

```
<bs:timeline>
{
  "showentitylistmenu": true,
  "preloadtitles": {
    "blog": "Template:Blog"
  },
  "preloadedentities": [{
    "type": "blog"
  }],
  "headlinemessagekey": "Community-Blog",
  "showheadline": true,
  "usemorescroll": false,
  "morelink": "Special:Blog",
  "limit": 5,
  "sort": [ {
    "property": "timestampcreated",
    "direction": "DESC"
  } ],
  "lockedfilternames": [
    "type"
  ],
  "filter": [ {
    "type": "list",
    "property": "type",
    "value": [ "blog" ],
    "comparison": "ct"
  } ]
}
</bs:timeline>
```

After saving the page, you will see a list of existing blog entries based on the filter and sorting criteria you provided.





Blog parameters

Output format

The following table shows the blog elements and the necessary parameters to create the output.

--	--

2




Community-Blog 1

Create a new blog...

3

Greg Rundlett über BlueSpice



a

Bei der EMWCon in Houston kam Greg Rundlett zu folgendem Ergebnis:BlueSpice is really the best option out there - I think globally - for MediaWiki Enterprise, MediaWiki hosting and support.

4

Recommend (0) ▾

Comments (1) vor einem Monat • Sarah Naumann


b

c

More ▾

Answer here...

5



d


Danke für den Hinweis! Eine Übersetzung wäre noch schön gewesen. Ich glaube auch nicht, dass jeder Leser schon versteht, was WebDAV bringt. Vielleicht kann man das noch etwas ausführlicher erklären?



6


vor einem Monat • Horst Schreiber

...

7

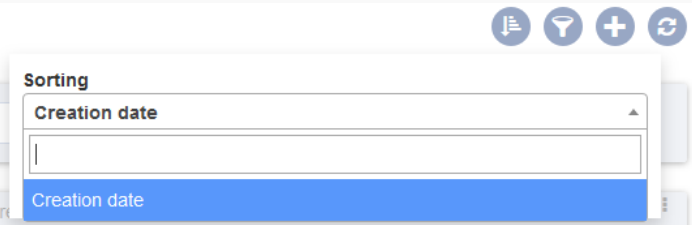Element	Parameters	Parameter and element description	Type	Default value
1 - header	headlinemessagekey	Header text	string	Timestamp
	showheadline	Show the header text	boolean	true
	showentitylistmenu	Show or hide the blog menu	boolean	true
	showentityspawner	Show the menu item for creating a blog entry	boolean	true
	availablesorterfields	Determines which data fields are included as sorting options in the sort menu. Example: allow sorting only by date created or by the user who created a blog entry: <pre>"availablesorterfields": ["timestampcreated", "ownerid"]</pre>  List of typical sort fields	array	all
	lockedoptionnames	Determines which settings for sorting the user cannot change.	array	[]

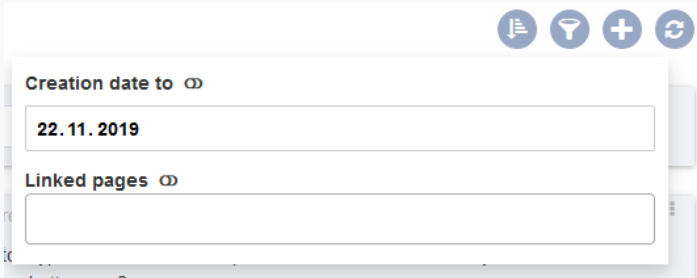Element	Parameters	Parameter and element description	Type	Default value
2 - blog menu	availablefilterfields	<p>Determines which data fields are included as filter options in the filter menu. Example: allow filtering based on Creation date and Linked pages:</p> <pre>"availablefilterfields": ["timestampcreated", "tags"]</pre> 	array	all
	lockedfilternames	<p>Determines which settings for filtering the user cannot change.</p> <p>Example: a user cannot change the filter values for <i>Linked pages</i>. The text field is greyed out:</p> <pre>"lockedfilternames": ["tags"]</pre> 	array	[]
	persistsettings	<p>Initial settings and custom sort and filter settings are included in the page url. The url can then be used to create a link to the page with the same filter and sort settings.</p> <pre>"persistsettings": true</pre> <pre>myblog?sort=[{"property":"timestampcreated","direction":"DESC"}]&filter=[{"type":"list","property":"type","value":["I</pre>	boolean	false
3 - new		<p>Shows the text field for creating a new blog entry. If it is not set, the text field is not available.</p> <p>To show the text field:</p>		

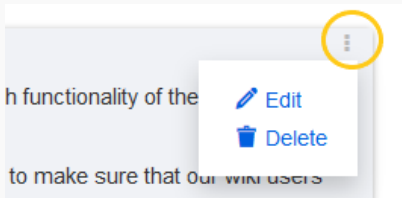Element	Parameters	Parameter and element description	Type	Default value
blog entry	preloadentities	<code>"preloadedentities": [{"type":"blog"}]</code>	array of objects	-
4 - existing blog entry	outputtypes	It defines the display format of the blog entry. Standard types are: <i>List</i> , <i>Short</i> , <i>Default</i> , <i>Page</i> . (see examples) Each blog entry is a "social entity".	object	Default
	limit	Defines how many social entities are loaded initially.	object	Default
4a - avatar	-	Shows the avatar of the user who created the blog entry or comment. It is displayed in all output types except <i>List</i> .	-	-
4b - info area	-	Link to the comments and "last edit" info.	-	-
4c - blog entry content	-	Shows the text body of a blog entry. The output type <i>Default</i> collapses the blog entry content after the first paragraph with a "More" link.	-	-
4d - action menu	-	Actions: <i>edit</i> , <i>delete</i> , <i>recommend</i> , <i>Linked page</i> , <i>watch</i> 	-	-
5 - new comment	-	Text field for creating a new comment.	-	-
6 - existing comment	-	Comments include the social tag <i>Recommend</i> . Each comment is a "social entity".	-	-
7 - "more" button	morelink	Link target of the "more" button. For blogs, it makes sense to link to the page <i>Special:Blog</i> .	string	Special:Blog
	useendlesscroll	More blog entries are automatically loaded after the user scrolls to the end of the blog.	boolean	true
		Shows a "more" button below the blog which loads more blog entries on click. This is only possible if		

Element	Parameters	Parameter and element description	Type	Default value
	showentitylistmore	<i>useendlessscroll</i> is set to <i>false</i> .	boolean	<i>false</i>

Sorting

Most commonly, a blog shows the latest blog entries first. However, there are many different options for sorting the list of blog entries.

Syntax

```
[{
  "property": "timestampouched",
  "direction": "DESC"
}]
```

Properties

There are some common properties of a blog entry that are useful for sorting:

Property	Description
timestampcreated	creation date
timestampouched	last edit date
commentcount	number of comments
ratingcount	number of ratings
ownerid	username of the creator of a blog entry
ownerrealname	real name of the user

Direction

Blog entries can be sorted in descending and ascending order. Descending is the default order.

Property	Description
DESC	sorts the blog entries in descending order

Property	Description
ASC	sorts the blog entries in ascending order

Filtering

Without setting the filter parameter, there will be no output on the page.

To show the blog entries of your wiki, include the following codeblock like shown in the code example above:

```
"filter": [ {
  "type": "list",
  "property": "type",
  "value": [ "blog" ],
  "comparison": "ct"
}]
```

This filter includes all social entities which match the type *blog*. Since we only want to show social entities of type *blog*, we only include *blog* entries in our filter. If you want to create a social timeline rather than a blog view, you can also add other types of social entities. The following example shows a timeline view that includes blog entries, discussion entries from wiki pages, and user profile information:

```
"filter": [ {
  "type": "list",
  "property": "type",
  "value": [ "blog", "topic", "profile" ],
  "comparison": "ct"
}]
```


Output type examples

The output type for a blog is added using the *outputtypes* parameter. Don't forget to include a comma before and after this parameter (unless this is the last parameter in your code):


```
"outputtypes": {
  "blog": "Default"
}
```

Default

The output type *Default* shows the content of a blog entry truncated after the first paragraph. To view the full text, users can click on the *More* link.



Greg Rundlett über BlueSpice



Bei der EMWCon in Houston kam Greg Rundlett zu folgendem Ergebnis:BlueSpice is really the best option out there - I think globally - for MediaWiki Enterprise, MediaWiki hosting and support.


Empfehlen (0)

Kommentar (1)

vor einem Monat » Sarah Naumann

Mehr

test



BlueSpice is really the best option out there - I think globally - for MediaWiki Enterprise, MediaWiki hosting and support. I mean they have put together a real organization.

Kommentare (0)


vor einer Stunde und 9 Minuten » Testuser

Mehr

"Default" output

Short


The output type *Short* does not show the content of the blog entry. To view the content, a user has to click on the title of a blog entry. This loads the actual page for the selected blog entity.



Greg Rundlett über BlueSpice

Comments (0)

2 months ago » Richard Heigl



BlueSpice Release 3.2


Comments (0)

1 year ago » WikiSysop

"Short" output

Page

The output type *Page* shows all blog elements, including the comments, in an expanded view.



Greg Rundlett über BlueSpice



Greg Rundlett came to the following conclusion at the EMWCon in Houston:

BlueSpice is really the best option out there - I think globally - for MediaWiki Enterprise, MediaWiki hosting and support. I mean they have put together a real organization. They do a great job of not just assembling the bits and pieces of MediaWiki, and the whole stack; but also Markus Glaser has put together a lot of custom code and extensions to enhance functionality. They have a great system for actually moving content back and forth, using what's called WebDAV technologies, so that you can seamlessly access shared drives as part of your wiki.

Buts that's it. Aside from BlueSpice there really aren't any hosting companies that put together any kind of featureful, current, maintained and customized full stack deployment of MediaWiki."

Except for the fact that there were a few more besides Markus ... I took that gladly to the memory.

By the way, who cares: The video streams of the EMWCon are all online [\(YouToube-Channel\)](#). I also found Victoria Coleman's contribution about the Foundation's perspectives and problems [interesting](#).

Comment (1) 2 years ago • Richard Heigl

Answer here...



I like it!

59 minutes ago • WikiSysop

"Page" output

List

The output type *List* only shows the title and the timestamp.

[Suggestion for improving search results](#) Created one hour and 56 minutes ago


[Greg Rundlett über BlueSpice](#) Created 2 months ago


"List" output

Configuration

In the [Config manager](#), you can change the following settings:

- **Use teaser text for blog entries in the timeline:** When you create a blog entry, you can create a teaser text for it by clicking the cogwheel symbol in the blog entry form. If this setting is active, the teaser text will be shown on the page *Special:Timeline* instead of the first part of the content.



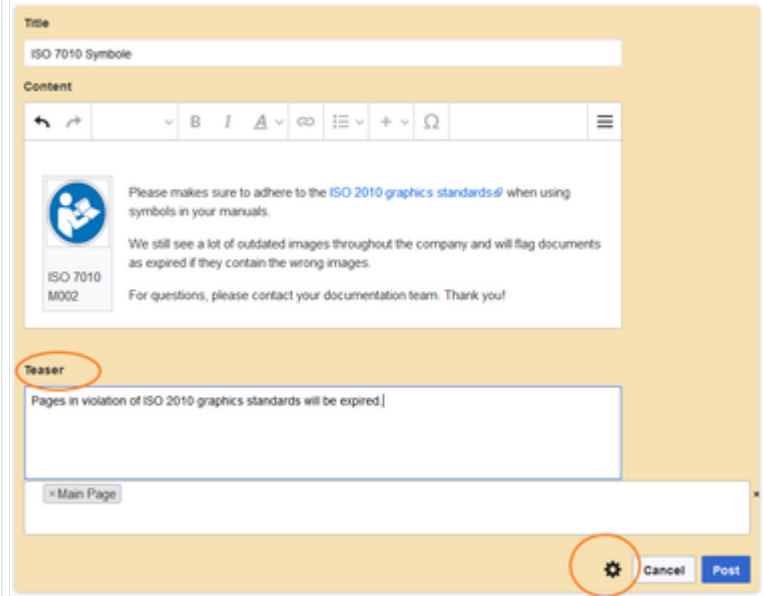

Title
ISO 7010 Symbole

Content

Please makes sure to adhere to the ISO 2010 graphics standards[#] when using symbols in your manuals.
We still see a lot of outdated images throughout the company and will flag documents as expired if they contain the wrong images.
For questions, please contact your documentation team. Thank you!

Teaser
Pages in violation of ISO 2010 graphics standards will be expired]

× Main Page

blog teaser text

- **Show entryptoint "Blog"**: Shows a link to the page *Special:Blog* in the main navigation.

Related info

- [Micro-Blog](#)
- [Discussions and Attachments](#)
- [Discussion topics](#)
- [Social comments](#)
- [User Profile](#)
- [Linked pages](#)
- [Reference:BlueSpiceSocial](#)

➔ [Technical Reference: BlueSpiceSocialBlog](#)