

Contents

1. Reference:BlueSpiceSmartList	2
2. Category:Extension	3
3. GPL-3.0-only	9
4. Manual:Extension/BlueSpiceSmartList	9

Reference:BlueSpiceSmartList

Extension: BlueSpiceSmartList

→ [all extensions](#)

Overview			
Description:	Displays the last five changes of the wiki in a list		
State:	stable	Dependency:	BlueSpice
Developer:	HalloWelt	License:	GPL-3.0-only
Type:	BlueSpice	Category:	Reporting
Edition:	BlueSpice pro, BlueSpice free, BlueSpice Farm, BlueSpice Cloud	Version:	4.1+
? View user help page			

Features

BlueSpiceSmartList allows to insert a list of pages by using the following tags:

- `<bs:smartlist />` / `<recentchanges />` - display a list of pages that were edited in the last 90 days. It can be filtered by namespaces or categories.
 - Different modes are possible if the `<bs:smartlist />` tag is added in source edit mode.
- `<bs:newbies />` - display a list of recently registered users.
- `<bs:toplist />` - display a list of most visited pages.

Technical Information

This information applies to BlueSpice 4. Technical details for BlueSpice Cloud can differ in some cases.

Requirements

MediaWiki: 1.38.0
BlueSpiceFoundation: 4.1

Integrates into

- BlueSpiceSmartList
- BlueSpiceUserSidebar
- ContentDroplets
- VisualEditor

Special pages

API Modules

- bs-smartlist-tasks

Hooks

- [BSDashboardsAdminDashboardPortalConfig](#)
- [BSDashboardsAdminDashboardPortalPortlets](#)
- [BSDashboardsUserDashboardPortalConfig](#)
- [BSDashboardsUserDashboardPortalPortlets](#)
- [BSUsageTrackerRegisterCollectors](#)

Accessibility

Test status:	2-testing complete
Checked for:	Web, Authoring tool
Last test date:	2022-08-05
WCAG level:	AA
WCAG support:	partially supports (workaround: yes)
Comments:	Authoring tool: Tag has to be added in source edit mode.
Extension type:	core
Extension focus:	editor

Category:Extension

Extensions that are bundled with one or more BlueSpice pro editions.

Pages in category "Extension"

The following 200 pages are in this category, out of 214 total.

(previous page) ([next page](#))

A

- [Reference:Arrays](#)
- [Reference:AtMentions](#)
- [Reference:Auth remoteuser](#)

B

- [Reference:BlueSpiceAbout](#)
- [Reference:BlueSpiceArticleInfo](#)
- [Reference:BlueSpiceArticlePreviewCapture](#)
- [Reference:BlueSpiceAvatars](#)
- [Reference:BlueSpiceBookshelf](#)
- [Reference:BlueSpiceCategoryCheck](#)
- [Reference:BlueSpiceCategoryManager](#)
- [Reference:BlueSpiceChecklist](#)
- [Reference:BlueSpiceCloudClient](#)
- [Reference:BlueSpiceConfigManager](#)
- [Reference:BlueSpiceContextMenu](#)
- [Reference:BlueSpiceCountThings](#)
- [Reference:BlueSpiceCustomMenu](#)
- [Reference:BlueSpiceDashboards](#)
- [Reference:BlueSpiceDiscovery](#)
- [Reference:BlueSpiceDistributionConnector](#)
- [Reference:BlueSpiceDrawioConnector](#)
- [Reference:BlueSpiceEchoConnector](#)
- [Reference:BlueSpiceEmoticons](#)
- [Reference:BlueSpiceExpiry](#)
- [Reference:BlueSpiceExportTables](#)
- [Reference:BlueSpiceExtendedFilelist](#)
- [Reference:BlueSpiceExtendedSearch](#)
- [Reference:BlueSpiceExtendedStatistics](#)
- [Reference:BlueSpiceFilterableTables](#)
- [Reference:BlueSpiceFlaggedRevsConnector](#)
- [Reference:BlueSpiceFoundation](#)
- [Reference:BlueSpiceGroupManager](#)
- [Reference:BlueSpiceHideTitle](#)
- [Reference:BlueSpiceInsertCategory](#)

- [Reference:BlueSpiceInsertFile](#)
- [Reference:BlueSpiceInsertLink](#)
- [Reference:BlueSpiceInsertMagic](#)
- [Reference:BlueSpiceInsertTemplate](#)
- [Reference:BlueSpiceInstanceStatus](#)
- [Reference:BlueSpiceInterWikiLinks](#)
- [Reference:BlueSpiceInterwikiSearch](#)
- [Reference:BlueSpiceMultiUpload](#)
- [Reference:BlueSpiceNamespaceManager](#)
- [Reference:BlueSpiceNSFileRepoConnector](#)
- [Reference:BlueSpicePageAccess](#)
- [Reference:BlueSpicePageAssignments](#)
- [Reference:BlueSpicePageFormsConnector](#)
- [Reference:BlueSpicePagesVisited](#)
- [Reference:BlueSpicePageTemplates](#)
- [Reference:BlueSpicePermissionManager](#)
- [Reference:BlueSpicePlayer](#)
- [Reference:BlueSpicePrivacy](#)
- [Reference:BlueSpiceProDistributionConnector](#)
- [Reference:BlueSpiceQrCode](#)
- [Reference:BlueSpiceRating](#)
- [Reference:BlueSpiceReadConfirmation](#)
- [Reference:BlueSpiceReaders](#)
- [Reference:BlueSpiceReminder](#)
- [Reference:BlueSpiceRSSFeeder](#)
- [Reference:BlueSpiceSaferEdit](#)
- [Reference:BlueSpiceSignHere](#)
- [Reference:BlueSpiceSmartList](#)
- [Reference:BlueSpiceSMWConnector](#)
- [Reference:BlueSpiceSocial](#)
- [Reference:BlueSpiceSocialBlog](#)
- [Reference:BlueSpiceSocialComments](#)
- [Reference:BlueSpiceSocialMicroBlog](#)
- [Reference:BlueSpiceSocialProfile](#)
- [Reference:BlueSpiceSocialRating](#)
- [Reference:BlueSpiceSocialResolve](#)
- [Reference:BlueSpiceSocialTags](#)
- [Reference:BlueSpiceSocialTimelineUpdate](#)
- [Reference:BlueSpiceSocialTopics](#)
- [Reference:BlueSpiceSocialWatch](#)
- [Reference:BlueSpiceTagCloud](#)
- [Reference:BlueSpiceUEModuleBookPDF](#)
- [Reference:BlueSpiceUEModuleDOCX](#)
- [Reference:BlueSpiceUEModuleHTML](#)
- [Reference:BlueSpiceUEModulePDF](#)
- [Reference:BlueSpiceUEModulePDFRecursive](#)
- [Reference:BlueSpiceUEModulePDFSubpages](#)
- [Reference:BlueSpiceUEModuleTable2Excel](#)
- [Reference:BlueSpiceUniversalExport](#)

- [Reference:BlueSpiceUsageTracker](#)
- [Reference:BlueSpiceUserInfo](#)
- [Reference:BlueSpiceUserManager](#)
- [Reference:BlueSpiceUserSidebar](#)
- [Reference:BlueSpiceVisualEditorConnector](#)
- [Reference:BlueSpiceWatchList](#)
- [Reference:BlueSpiceWebDAVClientIntegration](#)
- [Reference:BlueSpiceWebDAVMinorSave](#)
- [Reference:BlueSpiceWhoIsOnline](#)
- [Reference:BlueSpiceWikiExplorer](#)
- [Reference:BlueSpiceWikiFarm](#)

C

- [Reference:CategoryTree](#)
- [Reference:Checklists](#)
- [Reference:Cite](#)
- [Reference:CiteThisPage](#)
- [Reference:CodeEditor](#)
- [Reference:CodeMirror](#)
- [Reference:CognitiveProcessDesigner](#)
- [Reference:ConfirmAccount](#)
- [Reference:ConfirmEdit](#)
- [Reference:ContainerFilter](#)
- [Reference:ContentDroplets](#)
- [Reference:ContentProvisioning](#)
- [Reference:ContentStabilization](#)
- [Reference:ContentTransfer](#)
- [Reference:CreateUserPage](#)

D

- [Reference:Data Transfer](#)
- [Reference:DateTimeTools](#)
- [Reference:DrawioEditor](#)
- [Reference:DynamicPageList3](#)

E

- [Reference:Echo](#)
- [Reference:EmbedVideo](#)
- [Reference:EmbedVideo \(fork\)](#)
- [Reference:EnhancedUpload](#)
- [Reference:EventBus](#)
- [Reference:External Data](#)
- [Reference:ExtJSBase](#)

F

- [Reference:FilterSpecialPages](#)

- [Reference:FlaggedRevs](#)
- [Reference:FlexiSkin](#)
- [Reference:FontAwesome](#)
- [Reference:Forms](#)

G

- [Reference:Gadgets](#)

H

- [Template:Hdsk PT Extension HW](#)
- [Template:Hdsk PT Extension MW](#)
- [Reference:Header Tabs](#)
- [Reference:HeaderFooter](#)
- [Reference:HitCounters](#)

I

- [Reference:ImageMap](#)
- [Reference:ImageMapEdit](#)
- [Reference:ImportOfficeFiles](#)
- [Reference:InputBox](#)
- [Reference:Interwiki](#)
- [Reference:InviteSignup](#)

L

- [Reference:LDAP Authorization](#)
- [Reference:LDAPAuthentication2](#)
- [Reference:LDAPGroups](#)
- [Reference:LDAPProvider](#)
- [Reference:LDAPSyncAll](#)
- [Reference:LDAPUserInfo](#)
- [Reference:Lingo](#)
- [Reference:LocalisationUpdate](#)
- [Reference>LoginNotify](#)
- [Reference:Loops](#)

M

- [Reference:Maps](#)
- [Reference:Math](#)
- [Reference:MediaWiki](#)
- [Reference:MenuEditor](#)
- [Reference:MergeArticles](#)
- [Reference:MultimediaViewer](#)

N

- [Reference:NSFileRepo](#)
- [Reference:Nuke](#)

O

- [Reference:OATHAuth](#)
- [Reference:OJSPlus](#)
- [Reference:OpenID Connect](#)
- [Reference:OpenLayers](#)

P

- [Reference:Page Forms](#)
- [Reference:PageCheckout](#)
- [Reference:PageHeader](#)
- [Reference:PageImages](#)
- [Reference:ParserFunctions](#)
- [Reference:ParserHooks](#)
- [Reference:PDFEmbed](#)
- [Reference:PdfHandler](#)
- [Reference:PluggableAuth](#)
- [Reference:Poem](#)
- [Reference:Popups](#)
- [Reference:PreToClip](#)

R

- [Archive:Reference:BlueSpiceCalumma](#)
- [Archive:Reference:BlueSpiceLatexRenderer](#)
- [Archive:Reference:BlueSpiceMatomoConnector](#)
- [Archive:Reference:BlueSpiceNamespaceCSS](#)
- [Archive:Reference:BlueSpiceSocialWikiPage](#)
- [Archive:Reference:Bootstrap](#)
- [Archive:Reference:Chameleon](#)
- [Reference:Renameuser](#)
- [Reference:Replace Text](#)
- [Reference:RevisionSlider](#)
- [Reference:RSS](#)

S

- [Reference:Scribunto](#)
- [Reference:SectionAnchors](#)
- [Reference:SecureLinkFixer](#)
- [Reference:Semantic Compound Queries](#)
- [Reference:Semantic Extra Special Properties](#)
- [Reference:Semantic MediaWiki](#)

- [Reference:Semantic Result Formats](#)
- [Reference:Semantic Scribunto](#)
- [Reference:SimpleSAMLphp](#)
- [Reference:SimpleTasks](#)
- [Reference:SpamBlacklist](#)
- [Reference:StandardDialogs](#)
- [Reference:SubPageList](#)
- [Reference:SyntaxHighlight](#)

T

- [Reference:TabberNeue](#)
- [Reference:TemplateData](#)
- [Reference:TemplateStyles](#)
- [Reference:TextExtracts](#)
- [Reference:TitleBlacklist](#)

([previous page](#)) ([next page](#))

GPL-3.0-only

Redirect to:

- [GPL v3](#)

Generate page lists (smart lists)

The extension **SmartList** allows to insert a list of pages in a wiki page using the tags *smartlist*, *newbies*, or *toplist*. The selection criteria can be set using a dialog box.

Contents

1 Available tags	10
2 Smartlist	10
2.1 Parameters	11
2.2 Wikitext editing	12
3 Newbies	12
3.1 Parameters	13
3.2 Example in wikicode	13
4 Toplist	13
4.1 Parameters	13
4.2 Example in wikicode	13

Available tags

The extension SmartList includes three different tags:


- `<bs:smartlist />` / `<recentchanges />` - display a list of pages that were edited in the last 90 days. It can be filtered by namespaces or categories.
 - Different modes are possible if the `<bs:smartlist />` tag is added in source edit mode.
- `<bs:newbies />` - display a list of recently registered users.
- `<bs:toplist />` - display a list of most visited pages.

The tags can be added as content droplets. v4.3+ . Earlier BlueSpice versions contained the menu item *Insert > Magic word* in [VisualEditor](#). -v4.3

Smartlist

The `<bs:smartlist />` tag shows a list of recently changed pages (<90 days) by default.

The list can be inserted in source edit mode or as the [content droplet](#) "Recent changes", in which case it is inserted as `<recentchanges />` tag in the page source. v4.3+

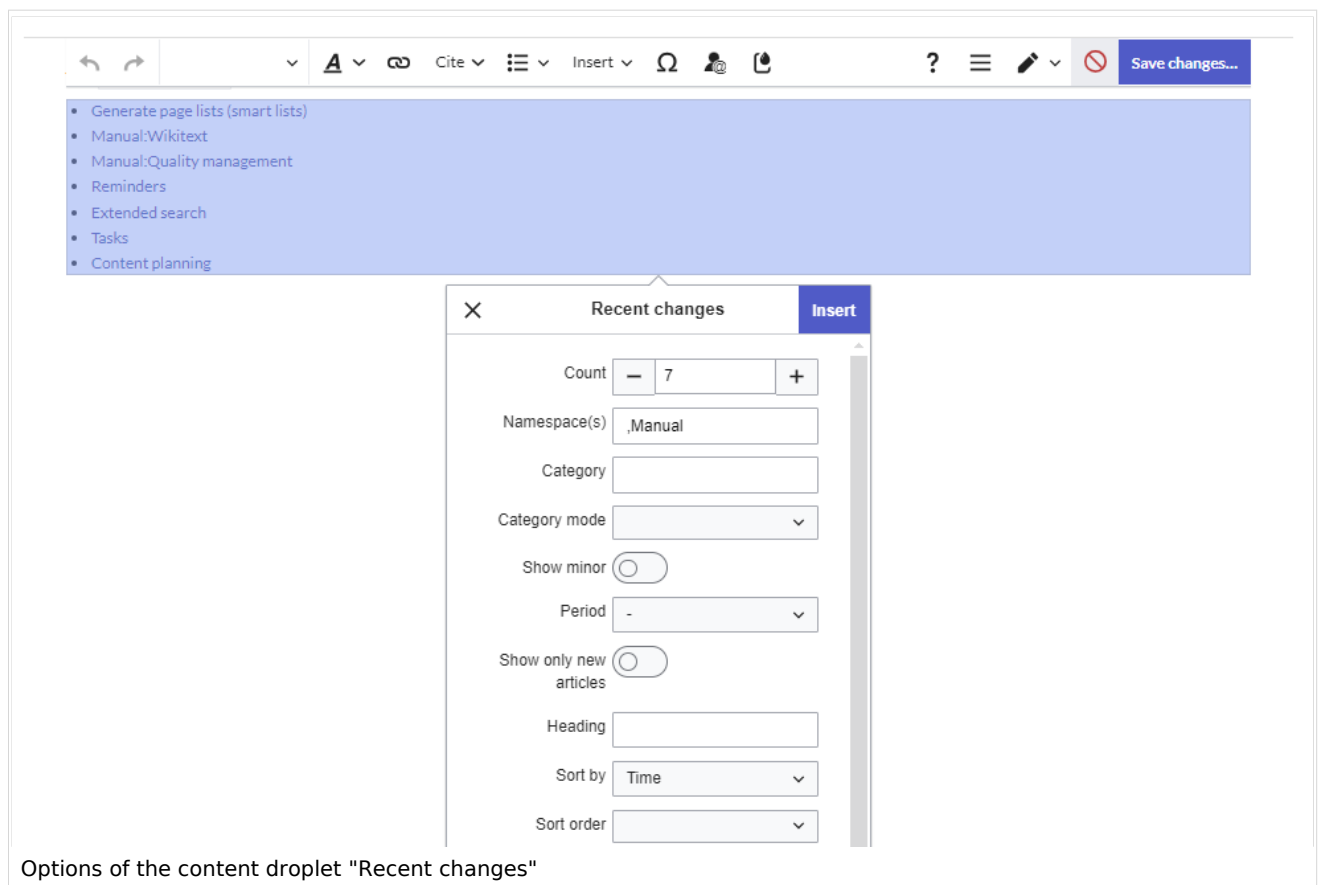

In source edit mode, the *smartlist* tag (not the *recentchanges* tag!) additionally accepts the [parameter mode](#) with the following values:

- `mode=stablepages`
- `mode=whatlinkshere`

Parameters

The SmartList inspector allows to set the following parameters:

Label	Parameter	Values	Description
Count	count	number	The number of articles to be shown. Default value: 5
Namespace(s)	ns	number or name	Only articles from given namespace will be listed. The namespaces can be entered by IDs or by names. Several namespaces can be separated with commas: ns="0,2,5" or ns="Help,User,Test". Default: All namespaces are included. Note: Only content namespaces are included in the list.
Category	cat	name	Only articles from given category will be listed. Selecting several categories is not possible. Default: All categories.
Category mode	catmode	AND, OR	Show pages if they are in at least one of the categories (OR) or show pages if they are tagged with all categories (AND).
Show minor	minor	true, false	Minor changes (changes marked with an "m" in the recent changes) will not be listed. Default: Minor changes are listed.
Period	period	-, month, week, day	Only changes within given period are shown. Default: No limit is set (full 90 days are shown).
Show only new articles	new	true, false	Only new pages will be listed. Default: All pages are shown
Heading	heading	text	Adds a heading above the list
Sort by	sort	Title, Time	Sort results by title or by latest edited.
Sort order	order	asc, desc	Ascending or descending sort order.
Trim	trim	number	Long article names are not cropped. Default: The title is cut off after 30 characters.
	showtext	true,	

Show text		false	With this option, a line of the article contents will be shown alongside the title.
Trim text	trimtext	number	"trimtext" sets the number of characters of an article's content shown. This is only relevant when <i>showtext="true"</i>). <i>Note</i> : trimtext="0" is <u>not</u> possible.
Show namespaces	shows	true, false	If true, the namespace prefix is shown with the page names.
Number with text	numwithtext	number	Anzahl der Artikel die mit Einführungstext angezeigt werden sollen. Nur effektiv wenn <i>showtext=true</i>
Meta	meta	true	The username and date for the last edit are shown.
Target	target	-	Obsolete
Exclude namespace (s)	excludens	number or name	Articles from given namespaces will not be shown. The namespaces can be entered by IDs or by names (comma-separated). Default: All namespaces are included.

Wikitext editing

Here you see a syntax example with some parameters. These can only be added in source edit mode.

15 of the pages from the category *ISO9001* that were changed in the last 90 days are displayed in alphabetical order.

```
<bs:smartlist sort="title" cat="ISO9001" count="15" heading="Pages about ISO 9001" / >
```

If the approval feature is activated, the list can be set to include the latest [approved pages](#) (instead of edited pages:

```
<bs:smartlist period="week" sort=" time" shows="0" mode="stablepages" count="8" />
```

Alternatively, the smartlist can also display a list of pages that link to a wiki page. The corresponding page name is specified as `target` :

```
<bs:smartlist mode="whatlinkshere" target="Main Page" />
```

Newbies

The tag `<bs:newbies />` shows recently registered wiki users.

The list can be inserted as the [content droplet](#) "New users". v4.3+

Parameters

Label	Parameter	Values	Description
Count - count			The number of users to be shown; the default value is 10.

Example in wikicode

```
<bs:newbies count="7"/>
```

Toplist

This tag shows a list of the most visited pages.

The list can be inserted as the [content droplet](#) "Most visited pages". v4.3+

Parameters

Label	Paramter	Values	Description
Count	count	number	The number of articles to be shown; the default value is 10.
Namespaces	ns	text, text	Only articles from these namespace will be shown. You can put several namespaces here, separated by commas.
Category	cat	text, text	Only articles from this category will be shown. You can put several categories here, separated by commas.
Period	period	month, alltime	The period that should be used. The default is alltime.

Example in wikicode

```
<bs:toplist count="7" ns="Help|QM" />
```



[Technical Reference: BlueSpiceSmartList](#)