

Contents

1. Reference:EmbedVideo	2
2. Category:Extension	3
3. Manual:Extension/EmbedVideo	8

Reference:EmbedVideo

Extension: EmbedVideo

→ [all extensions](#)

Overview			
Description:	Adds a parser function called <code>#ev</code> for embedding video clips from popular video sharing services.		
State:	stable	Dependency:	MediaWiki
Developer:	Alexia E. Smith, Andrew Whitworth, Jim R. Wilson, Mohammad Derakhshani	License:	MIT
Type:	MediaWiki	Category:	Rich Articles
Edition:	BlueSpice free, BlueSpice pro, BlueSpice Farm, BlueSpice Cloud	Version:	4.1- 4.3.3
? View help page			

Features

EmbedVideo extension adds a parser function called `#ev` for embedding video clips from over 24 popular video sharing services in multiple languages and countries. It also adds video and audio media handlers to support transforming standard `[[File:Example.mp4]]` file links into embedded HTML5 `<video>` and `<audio>` tags.

Accessibility

Test status:	2-testing complete
Checked for:	Web, Authoring tool
Last test date:	2022-08-08
WCAG level:	AA
WCAG support:	supports

Comments:	Authoring tool: tag is added in source editing mode. Web: Output for uploaded and external videos is a standard video tag.
Extension type:	extended
Extension focus:	reader

Category:Extension

Extensions that are bundled with one or more BlueSpice pro editions.

Pages in category "Extension"

The following 200 pages are in this category, out of 214 total.

(previous page) ([next page](#))

A

- [Reference:Arrays](#)
- [Reference:AtMentions](#)
- [Reference:Auth remoteuser](#)

B

- [Reference:BlueSpiceAbout](#)
- [Reference:BlueSpiceArticleInfo](#)
- [Reference:BlueSpiceArticlePreviewCapture](#)
- [Reference:BlueSpiceAvatars](#)
- [Reference:BlueSpiceBookshelf](#)
- [Reference:BlueSpiceCategoryCheck](#)
- [Reference:BlueSpiceCategoryManager](#)
- [Reference:BlueSpiceChecklist](#)
- [Reference:BlueSpiceCloudClient](#)
- [Reference:BlueSpiceConfigManager](#)
- [Reference:BlueSpiceContextMenu](#)
- [Reference:BlueSpiceCountThings](#)
- [Reference:BlueSpiceCustomMenu](#)
- [Reference:BlueSpiceDashboards](#)
- [Reference:BlueSpiceDiscovery](#)
- [Reference:BlueSpiceDistributionConnector](#)
- [Reference:BlueSpiceDrawioConnector](#)
- [Reference:BlueSpiceEchoConnector](#)
- [Reference:BlueSpiceEmoticons](#)

- [Reference:BlueSpiceExpiry](#)
- [Reference:BlueSpiceExportTables](#)
- [Reference:BlueSpiceExtendedFilelist](#)
- [Reference:BlueSpiceExtendedSearch](#)
- [Reference:BlueSpiceExtendedStatistics](#)
- [Reference:BlueSpiceFilterableTables](#)
- [Reference:BlueSpiceFlaggedRevsConnector](#)
- [Reference:BlueSpiceFoundation](#)
- [Reference:BlueSpiceGroupManager](#)
- [Reference:BlueSpiceHideTitle](#)
- [Reference:BlueSpiceInsertCategory](#)
- [Reference:BlueSpiceInsertFile](#)
- [Reference:BlueSpiceInsertLink](#)
- [Reference:BlueSpiceInsertMagic](#)
- [Reference:BlueSpiceInsertTemplate](#)
- [Reference:BlueSpiceInstanceStatus](#)
- [Reference:BlueSpiceInterWikiLinks](#)
- [Reference:BlueSpiceInterwikiSearch](#)
- [Reference:BlueSpiceMultiUpload](#)
- [Reference:BlueSpiceNamespaceManager](#)
- [Reference:BlueSpiceNSFileRepoConnector](#)
- [Reference:BlueSpicePageAccess](#)
- [Reference:BlueSpicePageAssignments](#)
- [Reference:BlueSpicePageFormsConnector](#)
- [Reference:BlueSpicePagesVisited](#)
- [Reference:BlueSpicePageTemplates](#)
- [Reference:BlueSpicePermissionManager](#)
- [Reference:BlueSpicePlayer](#)
- [Reference:BlueSpicePrivacy](#)
- [Reference:BlueSpiceProDistributionConnector](#)
- [Reference:BlueSpiceQrCode](#)
- [Reference:BlueSpiceRating](#)
- [Reference:BlueSpiceReadConfirmation](#)
- [Reference:BlueSpiceReaders](#)
- [Reference:BlueSpiceReminder](#)
- [Reference:BlueSpiceRSSFeeder](#)
- [Reference:BlueSpiceSaferEdit](#)
- [Reference:BlueSpiceSignHere](#)
- [Reference:BlueSpiceSmartList](#)
- [Reference:BlueSpiceSMWConnector](#)
- [Reference:BlueSpiceSocial](#)
- [Reference:BlueSpiceSocialBlog](#)
- [Reference:BlueSpiceSocialComments](#)
- [Reference:BlueSpiceSocialMicroBlog](#)
- [Reference:BlueSpiceSocialProfile](#)
- [Reference:BlueSpiceSocialRating](#)
- [Reference:BlueSpiceSocialResolve](#)
- [Reference:BlueSpiceSocialTags](#)
- [Reference:BlueSpiceSocialTimelineUpdate](#)

- [Reference:BlueSpiceSocialTopics](#)
- [Reference:BlueSpiceSocialWatch](#)
- [Reference:BlueSpiceTagCloud](#)
- [Reference:BlueSpiceUEModuleBookPDF](#)
- [Reference:BlueSpiceUEModuleDOCX](#)
- [Reference:BlueSpiceUEModuleHTML](#)
- [Reference:BlueSpiceUEModulePDF](#)
- [Reference:BlueSpiceUEModulePDFRecursive](#)
- [Reference:BlueSpiceUEModulePDFSubpages](#)
- [Reference:BlueSpiceUEModuleTable2Excel](#)
- [Reference:BlueSpiceUniversalExport](#)
- [Reference:BlueSpiceUsageTracker](#)
- [Reference:BlueSpiceUserInfo](#)
- [Reference:BlueSpiceUserManager](#)
- [Reference:BlueSpiceUserSidebar](#)
- [Reference:BlueSpiceVisualEditorConnector](#)
- [Reference:BlueSpiceWatchList](#)
- [Reference:BlueSpiceWebDAVClientIntegration](#)
- [Reference:BlueSpiceWebDAVMinorSave](#)
- [Reference:BlueSpiceWholsOnline](#)
- [Reference:BlueSpiceWikiExplorer](#)
- [Reference:BlueSpiceWikiFarm](#)

C

- [Reference:CategoryTree](#)
- [Reference:Checklists](#)
- [Reference:Cite](#)
- [Reference:CiteThisPage](#)
- [Reference:CodeEditor](#)
- [Reference:CodeMirror](#)
- [Reference:CognitiveProcessDesigner](#)
- [Reference:ConfirmAccount](#)
- [Reference:ConfirmEdit](#)
- [Reference:ContainerFilter](#)
- [Reference:ContentDroplets](#)
- [Reference:ContentProvisioning](#)
- [Reference:ContentStabilization](#)
- [Reference:ContentTransfer](#)
- [Reference:CreateUserPage](#)

D

- [Reference:Data Transfer](#)
- [Reference:DateTimeTools](#)
- [Reference:DrawioEditor](#)
- [Reference:DynamicPageList3](#)

E

- [Reference:Echo](#)
- [Reference:EmbedVideo](#)
- [Reference:EmbedVideo \(fork\)](#)
- [Reference:EnhancedUpload](#)
- [Reference:EventBus](#)
- [Reference:External Data](#)
- [Reference:ExtJSBase](#)

F

- [Reference:FilterSpecialPages](#)
- [Reference:FlaggedRevs](#)
- [Reference:FlexiSkin](#)
- [Reference:FontAwesome](#)
- [Reference:Forms](#)

G

- [Reference:Gadgets](#)

H

- [Template:Hdsk PT Extension HW](#)
- [Template:Hdsk PT Extension MW](#)
- [Reference:Header Tabs](#)
- [Reference:HeaderFooter](#)
- [Reference:HitCounters](#)

I

- [Reference:ImageMap](#)
- [Reference:ImageMapEdit](#)
- [Reference:ImportOfficeFiles](#)
- [Reference:InputBox](#)
- [Reference:Interwiki](#)
- [Reference:InviteSignup](#)

L

- [Reference:LDAP Authorization](#)
- [Reference:LDAPAuthentication2](#)
- [Reference:LDAPGroups](#)
- [Reference:LDAPProvider](#)
- [Reference:LDAPSynAll](#)
- [Reference:LDAPUserInfo](#)
- [Reference:Lingo](#)
- [Reference:LocalisationUpdate](#)

- [Reference:LoginNotify](#)
- [Reference:Loops](#)

M

- [Reference:Maps](#)
- [Reference:Math](#)
- [Reference:MediaWiki](#)
- [Reference:MenuEditor](#)
- [Reference:MergeArticles](#)
- [Reference:MultimediaViewer](#)

N

- [Reference:NSFileRepo](#)
- [Reference:Nuke](#)

O

- [Reference:OATHAuth](#)
- [Reference:OOJSPlus](#)
- [Reference:OpenID Connect](#)
- [Reference:OpenLayers](#)

P

- [Reference:Page Forms](#)
- [Reference:PageCheckout](#)
- [Reference:PageHeader](#)
- [Reference:PageImages](#)
- [Reference:ParserFunctions](#)
- [Reference:ParserHooks](#)
- [Reference:PDFEmbed](#)
- [Reference:PdfHandler](#)
- [Reference:PluggableAuth](#)
- [Reference:Poem](#)
- [Reference:Popups](#)
- [Reference:PreToClip](#)

R

- [Archive:Reference:BlueSpiceCalumma](#)
- [Archive:Reference:BlueSpiceLatexRenderer](#)
- [Archive:Reference:BlueSpiceMatomoConnector](#)
- [Archive:Reference:BlueSpiceNamespaceCSS](#)
- [Archive:Reference:BlueSpiceSocialWikiPage](#)
- [Archive:Reference:Bootstrap](#)
- [Archive:Reference:Chameleon](#)
- [Reference:Renameuser](#)
- [Reference:Replace Text](#)

- [Reference:RevisionSlider](#)
- [Reference:RSS](#)

S

- [Reference:Scribunto](#)
- [Reference:SectionAnchors](#)
- [Reference:SecureLinkFixer](#)
- [Reference:Semantic Compound Queries](#)
- [Reference:Semantic Extra Special Properties](#)
- [Reference:Semantic MediaWiki](#)
- [Reference:Semantic Result Formats](#)
- [Reference:Semantic Scribunto](#)
- [Reference:SimpleSAMLphp](#)
- [Reference:SimpleTasks](#)
- [Reference:SpamBlacklist](#)
- [Reference:StandardDialogs](#)
- [Reference:SubPageList](#)
- [Reference:SyntaxHighlight](#)

T

- [Reference:TabberNeue](#)
- [Reference:TemplateData](#)
- [Reference:TemplateStyles](#)
- [Reference:TextExtracts](#)
- [Reference:TitleBlacklist](#)

(previous page) ([next page](#))

Manual:Extension/EmbedVideo

 EmbedVideo is available up to BlueSpice 4.3. This extension is replaced by [a forked version](#).


BlueSpice integrates the MediaWiki extension *EmbedVideo* to embed video files from external video services such as YouTube or Vimeo. *EmbedVideo* supports more than 20 video services. In addition, you can also embed videos that have been uploaded to the wiki itself.

Contents

1 Embedding external videos	10
1.1 Syntax	10
1.2 Attributes for parser tag #evt	11
2 Embedding local videos	12
2.1 Media dialog	12
2.2 BlueSpicePlayer and EmbedVideo	12

3	Video container for multiple videos	13
3.1	The <evlplayer> tag	13
3.1.1	Attributes for tag <evlplayer>	14
3.2	Adding video links	15
3.2.1	Attributes for parser tag #evl	15
3.3	Example	15
4	Supported video services	15
5	Related info	16

Embedding external videos

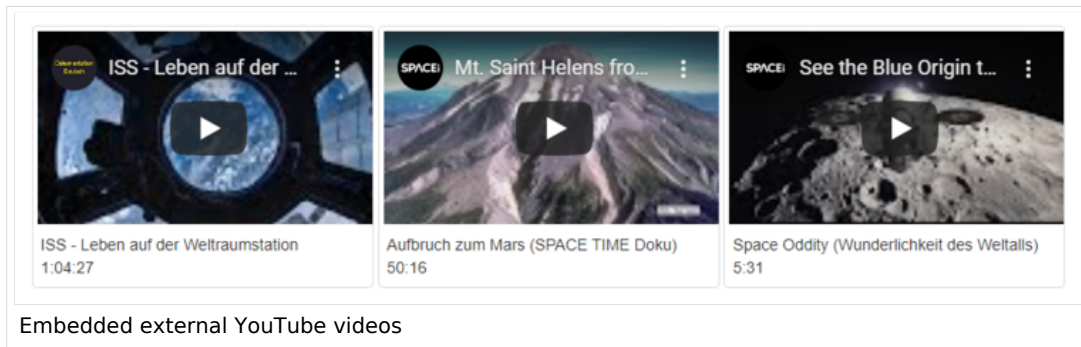

Note: These instructions are taken and adapted from the [Mediawiki help page](#) for EmbedVideo.

Syntax

Use the following parser tag to embed an external video in source editing mode:

```
{{#evt:
  service=youtube
  id=https://www.youtube.com/watch?v=MLIE2642neg
}}
```

You can add additional optional parameter (see [list of attributes](#)):

```
{{#evt:
  service=youtube
  id=https://www.youtube.com/watch?v=MLIE2642neg
  dimensions=300
  alignment=inline
  description=ISS - Life on the space station <br/> 1:04:27
  container=frame
  urlargs=
  autoresize=
  valignment=
}}
```

A shortened syntax is available with the `#ev` tag:

```
{{#ev:
  service|id|dimensions|alignment|description|container|urlargs|autoresize|valignment}}
```

Placeholders for unused arguments between two arguments have to remain empty and cannot be removed::

```
{{#ev:service|id|||description}}
```

The shortest option to embed a video is by specifying the service name and the video ID:

```
{{#ev:youtube|MLIE2642neg}}
```

Example with video description (- you can include a line break with the `<br />` tag):

```
{{#ev:youtube|MLIE2642neg||ISS - Life on the space station <br/> 1:04:27}}
```

Attributes for parser tag #evt

attribute	required	default	description
<code>service="(see supported services below)"</code>	yes		The video service that is called when the player is created.
<code>id="[id url]"</code>	yes		The video ID or full URL of the external video.
<code>dimensions="[width widthxheight xwidth]"</code>	no	640	Dimensions in pixelsto size the container for the player. The default format is width x height. It is possible to omit one of the dimensions. The <code>x</code> always has to be included before the height. Examples: <code>480</code> , <code>480x320</code> , <code>x320</code> . If the height is not specified, it is calculated using the width and the default ratio of the video service. Some video services such as <i>Gfycat</i> don't have a standard height. Therefore, the height setting should be included for each video. With <code>\$wgEmbedVideoDefaultWidth</code> the default width can be overwritten in the file <code>LocalSettings.php</code> on the server.
<code>alignment="[left center right inline]"</code>	no	none	The video can be placed left, center, right, or inline. Inline allows to add multiple videos in one row. In mobile view, the videos are automatically aligned vertically.
<code>description="[wiki text]"</code>	no	none	Shows a description below the player container.
<code>container="[frame]"</code>	no	none	Determines the container type for the player. <code>frame</code> : Places the video player in a Mediawiki preview box.
<code>urlargs="modestbranding=1&version=3"</code>	no	none	Allows adding additional URL-arguments to the embedded url. This is useful for settings that are only offered by an individual video service.

attribute	required	default	description
<code>autoresize="false"</code>	no	true	Automatically adjusts the video size if the video would extend beyond the size of the container.
<code>valignment="</code> <code>[top middle bottom baseline]"</code>	no	none	Aligns the vertical placement of the video either to the top, middle, bottom, or baseline of the parent element. Using this parameter forces the alignment parameter to be inline.

Embedding local videos

Media dialog

Like [images](#), videos can be inserted directly on a page via the media dialog. The wiki recognizes the file extension and automatically generates the necessary HTML player.

BlueSpicePlayer and EmbedVideo

Videos that have been uploaded to the Wiki can also be embedded in source editing mode. This can also be done using the extension [BlueSpicePlayer](#). BlueSpicePlayer has no functions to embed external videos, however.

The two extensions have the following differences when embedding local video files:


Syntax /Parameter	EmbedVideo	BlueSpicePlayer
Syntax	corresponds to the syntax of embedding image files: <code>[[File:samplename.mp4]]</code>	<code><bs:showtime>samplename.mp4</bs:sho</code>
Size	Only the width can be defined. The video fills the entire width of the player container:  <code>[[File:Manual:300px-video-size-showtime-600.PNG]]</code>	Width and height can be defined separately. If the width of the video is smaller than the video container, the canvas is filled in black. <code><bs:showtime width="600">..</code>  BlueSpicePlayer with 600px width


Syntax /Parameter	EmbedVideo	BlueSpicePlayer
Loop	-	<code><bs:showtime repeat="yes"></code></code>
Autostart	-	<code><bs:showtime autostart="yes"></code></code>
Star/End	[[File:samplename.mp4 start=2 end=6]] Time can be added as: <i>ss</i>, <i>mm:ss</i>, <i>hh:mm:ss</i>	-
HTML-Output	embedded as <code><video></code> tag	embedded through nested <code><div></code> tags
Adjusts to mobile display	yes	no
Player controls		
play button	yes	yes
progress bar	yes	yes
volume adjustment	yes	yes
fullscreen mode	yes	yes
picture-in-picture	yes	yes
download	yes	no
speed adjustment	no	yes

Video container for multiple videos

The `<evlplayer>` tag

Using the tag `<evlplayer>` and the parser function `#evl`, you can play multiple videos with one video player.



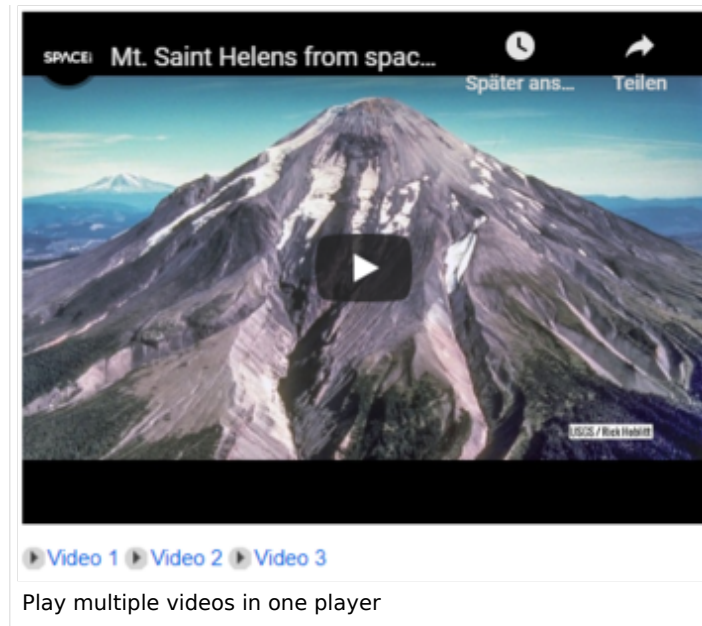

```
<evlplayer id="Player ID" w="width" h="height" class="class" style="style">default content</evlplayer>
```

A default video can be loaded using `defaultid`:

```
<evlplayer id="player1" w="480" h="360" service="youtube" defaultid="mCtmECVnr0M" />
```

Attributes for tag `<evlplayer>`

attribute	required	default	description
id	no	default	An optional unique identifier for this container.
w	no	800	Width to send to the embedded player when its generated.
h	no	16:9 ratio is achieved by the width setting	Height to send to the embedded player when its generated.
class	no		Additional CSS class to add to the container div style no Additional in-line CSS to apply to the container div.
style	no		Additional inline CSS to apply to the container div.
defaultid	no		Video ID of default video, if you want a default video.
service	no		Service of default video, if you want a default video.

Adding video links

Use the parser tag `{{#evl}}` to define the videos that should be passed to the player:

```
{{#evl:<video id>|<Link text>|<video to play>|service=youtube|player=<player id>}}
```

Example:

```
{{#evl:mCtmECVnrOM|Departure to Mars|player=example-player}}
```

In addition to the attributes for the tag `#evt`, there are some additional attributes available for the `#evl` tag.

Attributes for parser tag #evl

attribtute	required	default	description
video id	yes	none	The ID of the video you would like to play.
link text	yes	none	The text to display inside the link.
player	no	'default'	Player container to load video in. <i>Note that the ID 'default' will only exist if you've defined a player with no ID.</i>

Example

```
<evlplayer w="600" id="example-player">
default content
</evlplayer>
{{#evl:0LeWbRdW6rY|Let eet Go|1|player=example-player}}
{{#evl:mCtmECVnrOM|Departure to Mars|2|player=example-player}}
{{#evl:MLIE2642neg|ISS - Life in the space station|3|player=example-player}}
```

Supported video services

The following video services are supported by the extension EmbedVideo. In parentheses, you find the service names that are used with the tags `#evt` and `#ev`:

Archive.org Videos (archiveorg), Bambuser (bambuser), Bing (bing), Blip.tv (blip), C3TV (mediaccde), CollegeHumor (collegehumor), Dailymotion (dailymotion), Disclose.tv (disclose), Daum TVPot (tvpot), Div Share (divshare), Facebook (facebook), FunnyOrDie (funnyordie), Gfycat (gfycat), Hitbox (hitbox), JW Player (jwplayer), Kickstarter (kickstarter), Metacafe (metacafe),

Microsoft Stream (microsoftstream), Mixer (mixer), Nico Nico Video (nico), RuTube (rutube), SoundCloud (soundcloud), Spotify Album (spotifyalbum), Spotify Artist (spotifyartist), Spotify Song (spotifytrack), TeacherTube (teachertube), TED Talks (ted), Tubi TV (tubitv), Tudou (tudou), Twitch (twitch), Videomaten (videomaten), Vimeo (vimeo), Vine (vine), Yahoo Screen (yahoo), YouTube (youtube), YouTube Playlist (youtubeplaylist), YouTube Video List (youtubevideolist), Youku (youku)

Related info

- [Mediawiki help page for the extension EmbedVideo](#)
- [Help page for the extension BlueSpicePlayer - only for video files that have been uploaded to the wiki](#)
- [Template to embed video using the Visual Editor toolbar](#)



[Technical Reference: EmbedVideo](#)