



**Parsoid is the rendering service for VisualEditor. Make sure to install and configure Parsoid before configuring VisualEditor. See the instructions for Windows and Linux.**

### Contents

1 Server settings .....	1
2 Checking the Configuration manager .....	2
3 Activating VisualEditor for a namespace .....	3

## Server settings

---

Before you can use VisualEditor in BlueSpice, you have to activate it in your installation:

In the BlueSpice installation directory, locate the following files inside the folder „var\www\settings.d“:

## 020-VisualEditor.php:

```
020-VisualEditor.php x 020-BlueSpice Visual
1 <?php
2 return;
3
4 //Config decription can
5 //https://www.mediawiki.
6 wfLoadExtension( 'Visual
```

## 020-BlueSpiceVisualEditorConnector.php:

```
visualEditor.php x 020-blue-spice-visual-editor-connector.php x
<?php
return;
wfLoadExtension( "BlueSpiceVisualEditorConnector" );
$GLOBALS['bsgVisualEditorConnectorUploadDialogType'] = 'simple';

$GLOBALS['wgUploadDialog']['fields']['categories'] = true;
$GLOBALS['wgUploadDialog']['format']['filepage'] = '$DESCRIPTION $CATEGORIES';
```


1. Remove the line containing the „return;“ command in both files and save them.
2. Restart your web server (recommended).

## Checking the Configuration manager

---

In case the VisualEditor is still not appearing, check if VisualEditor is shown as activated in the configuration manager of your wiki:

1. Go to *Global actions > Config manager*
2. Make sure the checkbox "Enable VisualEditor for BlueSpice extensions" is activated:

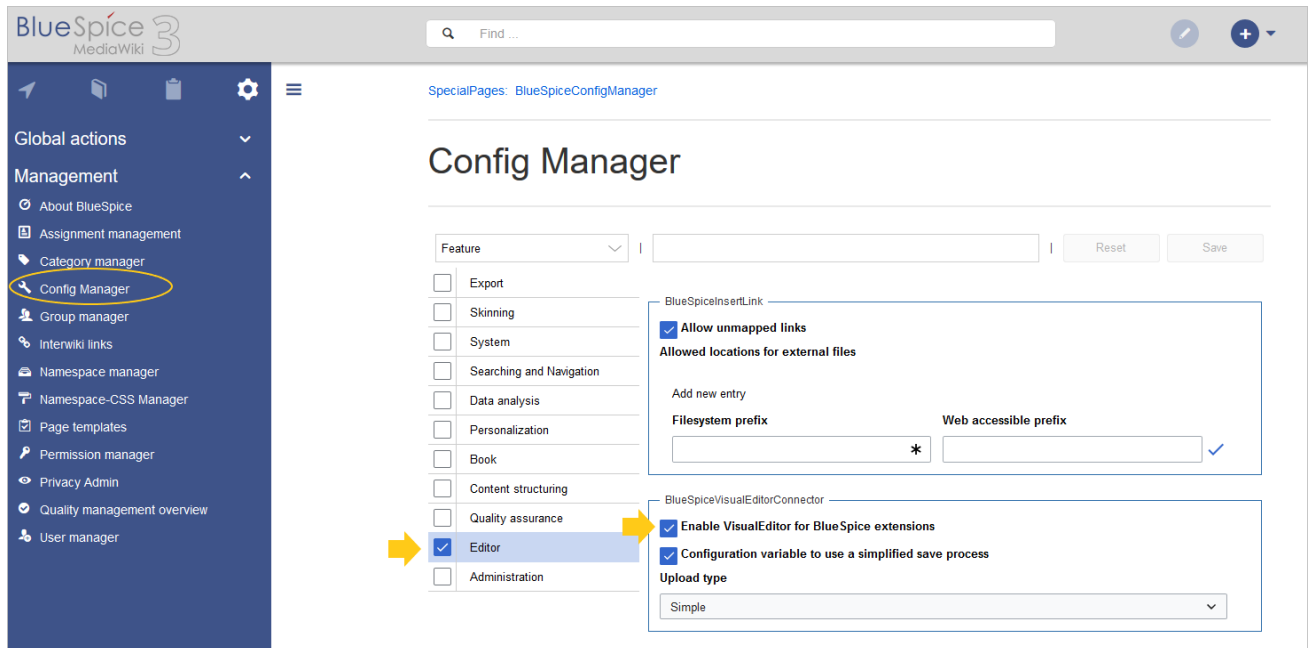

By default, VisualEditor is only activated in the main (Pages) and the User namespaces.

### Activating VisualEditor for a namespace

1. Go to Global actions > Namespace manager In the column "VisualEditor", you can see which namespaces have VisualEditor activated. They have a green check mark.
2. Click the wrench icon in the "Actions" column. The wrench appears, when you hover over the row of the namespace:

SpecialPages: NamespaceManager

## Namespace manager

Hide talk namespaces
 Export table

ID	Namespace	Pages	Subpages	Content namespace	CategoryCheck	Secured page assignments	Page template	Visual editor	Rating	Recommendations	Read Confirmation	Semantic MediaWiki	FlaggedRevs	Actions
3004	Legal	4	✓	✓	✗	✗	✓	✓	✗	✗	✗	✓	✗	
3005	Legal_Talk	2	✓	✗	✗	—	—	✗	—	—	✗	✗	✗	
3008	Setup	87	✓	✓	✗	✗	✓	✓	✗	✗	✗	✓	✓	
3009	Setup_Talk	4	✓	✗	✗	—	—	✗	—	—	✗	✗	✗	
3010	Reference	279	✓	✓	✗	✗	✓	✓	✗	✗	✗	✓	✓	
3011	Reference_Talk	9	✓	✗	✗	—	—	✗	—	—	✗	✗	✗	
3012	FAQ	75	✓	✓	✗	✗	✓	✗	✗	✗	✗	✓	✗	<input type="button" value="Edit"/>
3013	FAQ_Talk	1	✓	✗	✗	—	—	✗	—	—	✗	✗	✗	

1. Activate the checkbox for VisualEditor in the dialog window and click "Done":

The screenshot shows the 'Edit namespace' dialog box for the 'FAQ' namespace. The dialog has a 'Cancel' button on the left and a 'Done' button on the right, with a yellow arrow pointing to the 'Done' button. The 'Namespace name' field contains 'FAQ' and the 'Alias' field is empty. The following options are checked: Subpages, Content namespace, PageTemplates, Visual editor (highlighted with a yellow arrow), and Semantic MediaWiki. The following options are unchecked: CategoryCheck, Secured page assignments, Rating, Recommendations, Read Confirmation, and FlaggedRevs. The background shows a table of namespaces with columns for ID, Namespace, Semantic MediaWiki, and FlaggedRevs.

ID	Namespace	Semantic MediaWiki	FlaggedRevs	Actions
3004	Legal	✓	✗	
3005	Legal_Talk	✗	✗	
3008	Setup	✓	✓	
3009	Setup_Talk	✗	✗	
3010	Reference	✓	✓	
3011	Reference_Talk	✗	✗	
3012	FAQ	✓	✗	
3013	FAQ_Talk	✗	✗	

1. Refresh the Namespace manager page (F5) to confirm the change.

VisualEditor should now be working correctly in all namespaces that actively use it.